Polyhedron Suite

User Documentation · v397

by Polyhedron

The complete ComfyUI toolset in one manual: unified media I/O, group-aware LoRA management, segmented prompt encoding, a sampler and an upscale chain that show what they do — and, for MiniMax H3, the Cine Timeline: a short film on a time axis, rendered, cut and exported in one node. Written for every model; what differs between WAN 2.2, MiniMax H3 and the others is said where it matters.

I Media Loader & Save · II LoRA Stack · III CLIP Text Encode · IV Sampler · V Upscale & Interpolate
VI Attention & grading · VII Cine Timeline · VIII Workflow essentials · IX Model profiles and recipes

© Polyhedron · All rights reserved
civitai.red/user/Polyhedron_AI · patreon.com/c/polyhedron_ai

Contents

How to read this handbook

How to read this handbook 4

Part I — Media Loader & Save

At a glance — every output pin 6
1 · Folders & files 8
2 · Selection & views 11
3 · Video 15
4 · Audio 17
5 · Batch 19
6 · Outputs & masks 23
7 · Polyhedron Save 24

Part II — LoRA Stack

1 · Overview 27
2 · Installation 27
3 · LoRA Stack 28
4 · LoRA Engine 38
5 · LoRA Inspector 39
6 · Connecting the outputs 42
7 · Tips 42
8 · Previews & trigger words 43
9 · Token Counter 44
10 · Select Model Switch 46
11 · WAN Bridge 48
12 · Wan Frame Inflate 50
13 · Sigma Nodes 52
14 · Merge Analyzer 57
Addendum A · Added since this part was written 61
Addendum B · Model notes, chapter by chapter 62

Part III — CLIP Text Encode

1 · Overview 64
2 · Segments — the prompt in parts 65
3 · Comments — headings that cost nothing 66
4 · The negative — there, or honestly empty 69
5 · External text — prompts from elsewhere 70
6 · The footer — words, characters, tokens 72
7 · Search — find it in every field 73

Part IV — Sampler

1 · Overview 75
2 · Single — the everyday case 76
3 · High + Low — two experts, one node 77
4 · Live preview — watching it work 79
5 · Putting it together 80

Part V — Upscale & Interpolate

1 · Fast Upscale — size without invention 82
2 · Power Upscale — the thorough one 83
3 · Power Upscale — watching it work 85
4 · Interpolate — the frames in between 86
5 · Choosing between them 87
6 · Added since — refine order, restore, a wired curve, cuts 88

Part VI — Attention & grading

1 · Attention — the machinery underneath 91
2 · Attention — choosing a backend 92
3 · NAG — guidance without CFG 93
4 · Filter — grading you can see 94
5 · Audio Stretch — sound that follows the picture 95

Part VII — Cine Timeline

1 · Overview — one node, one film 97
2 · The form — mode, length, project, what a run renders 98
3 · Shots and the prompt 100
4 · Scenes and carry — a film in several clips 101
5 · Tracks — the editing room 102
6 · Seams — editing a film of scenes 103
7 · Files and export 104
8 · Cuts and the Interpolate 105

Part VIII — Workflow essentials

1 · Loaders and the VAE Codec 107

2 · Seed, Int and Empty Latent 108
3 · Switches, Media Info, Show Text, Note 109
4 · MiniMax Reference and Reference Board 110
5 · Sigma List 111

Part IX — Model profiles and recipes

1 · MiniMax H3 113
2 · WAN 2.2 114
3 · Other families 115
4 · Recipes 116

Part X — Control, Blend & Transition Check

1 · Control Fit 118
2 · Control Map and the Save templates 119
3 · Apply Control and the model door 120
4 · Polyhedron Blend 121
5 · Transition Check 122
6 · Recipe: first → last frame with a pose video 123

Appendix — Running on a network

Appendix — Running on a network 125

How to read this handbook

The suite's nodes are written for every model. What differs between models is collected in three places, so a chapter can describe a node once and still say what it means on the model you run.

Applies to

Under each chapter title a small label says whom it concerns:

Applies to: All models | Applies to: MiniMax H3 | Applies to: Two-expert models | WAN 2.x only

Parts I and II predate the labels; their notes are collected in Part II's addenda.

Model notes

MODEL NOTES

MiniMax H3	● What the chapter means on H3 — the model the suite runs today.
WAN 2.x	○ What it means on WAN, for which Parts II and IV were first written.
Others	○ Families the code supports but that are not field-tested.

How sure a statement is

Mark	Means
● field-tested	Seen on real runs.
◐ measured	Measured in a test or proven in the code, not yet seen on a real run.
○ supported	The code handles it; nobody has run it for this edition.

The six questions behind every difference

Property	The question	Changes
Guidance	Real CFG, or distilled to cfg 1?	negative prompt, NAG, merge cleanups
Experts	One model, or a high and a low expert?	Sampler mode, number of Stacks, sigma nodes
Streams	Picture only, or picture and sound in one latent?	Empty Latent, VAEs, merge cleanups, sound handling
Schedule	Scheduler and shift, or a trained grid?	Sigma List, what `steps` means
Frame grid	Which frame counts, which frame rate?	Empty Latent, Cine Timeline, Interpolate
Text encoder	Which encoder, which budget?	Token Counter, prompt length

Part IX answers the six questions for MiniMax H3 and WAN 2.2 and lists the other families the code knows.

Polyhedron Media Loader & Save

User Documentation · v397

by Polyhedron

The pack's unified media I/O: a pinned-folder loader with a live tile browser, batch modes, video/audio trimming and a mask-aware image path — paired with one Save node for stills, sequences, videos and masks.

© Polyhedron · All rights reserved
civitai.red/user/Polyhedron_AI · patreon.com/c/polyhedron_ai

The **Media Loader** is the pack's one-stop input node: images, image batches, videos and audio from any folder on your machine, with a visual tile browser, single-file and batch modes, video/audio trimming and a mask-aware image path. The **Save** node is its counterpart on the way out: one node for stills, image sequences, videos (with muxed audio) and masks, with presets, metadata embedding and date-based file naming.

They are built to work as a pair — what Save writes, the Loader reads back, including masks.

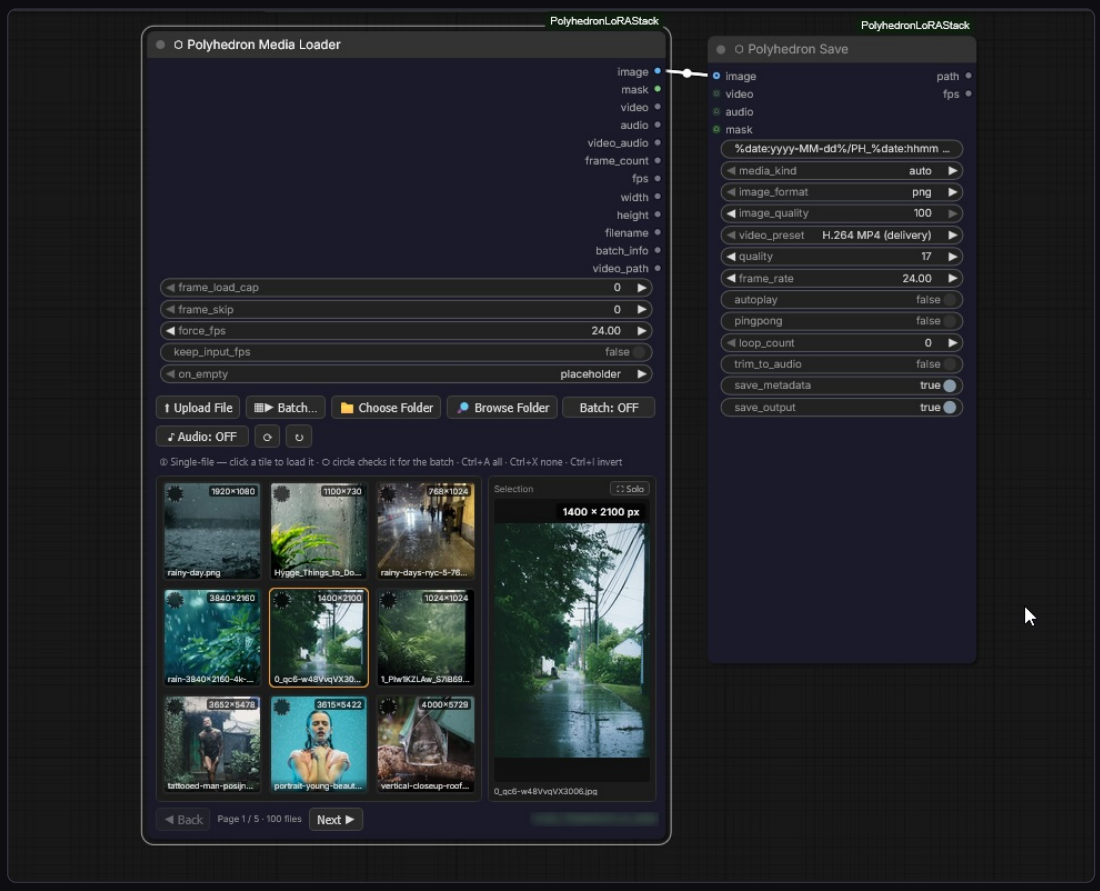

Media Loader wired into Save: tile grid, selection panel and the pinned folder

At a glance — every output pin

The Media Loader's output pins, top to bottom

Pin	Type	Carries
`image`	IMAGE `[N,H,W,3]`	The decoded frames — `N` = 1 for a still, the frame count for a video or batch. An audio-only pick emits a small placeholder frame so the graph keeps running.
`mask`	MASK `[N,H,W]`	The still's **alpha** (opaque → 0, like core LoadImage). A **grayscale still without alpha carries its luminance** as the mask, white → 1 — that is what makes a saved mask load back as the same mask. Plain video: blank; alpha-bearing video (VP9-alpha WEBM, ProRes 4444, transparent GIF): a real per-frame mask. Details in section 6.
`video`	VIDEO	A single video file **losslessly with its own audio**; a trimmed video is re-encoded from the sliced frames with its sound cut to the same window; an image batch or a still-with-audio becomes a synthesized clip. `None` only when there are no frames.
`audio`	AUDIO	The paired audio, decoded and trimmed (section 4). `None` when nothing is paired.
`video_audio`	VIDEO	The visual's frames muxed with the paired audio — wire it into a video save for an mp4 with a sound track. `None` when nothing is paired.
`frame_count`	INT	`1` for a still.
`fps`	FLOAT	`0.0` for a still; native or forced for a video.
`width` / `height`	INT	The decoded frame size.
`filename`	STRING	The loaded file's name; empty in sequence mode.
`batch_info`	STRING	The live batch counter (section 5): `Batch 0023 / 1334` per firing, `Batch 1334 frames (one pass)`, or `Single: <name>`.
`video_path`	STRING	The loaded file's **full path** — feeds the Batch Pipeline Source; empty in modes without a single source file.

The five widget rows below the pins are the video levers (`frame_load_cap`, `frame_skip`, `force_fps`, `keep_input_fps` — section 3) and the empty-state switch (`on_empty` — section 3).

---

1 · Folders & files (Media Loader)

The loader reads from a **pinned folder** — any folder on the machine running ComfyUI, not just the ComfyUI input directory. The current pin is shown at the bottom right of the node.

Picking a folder

📂 **Choose Folder** opens the in-canvas picker:

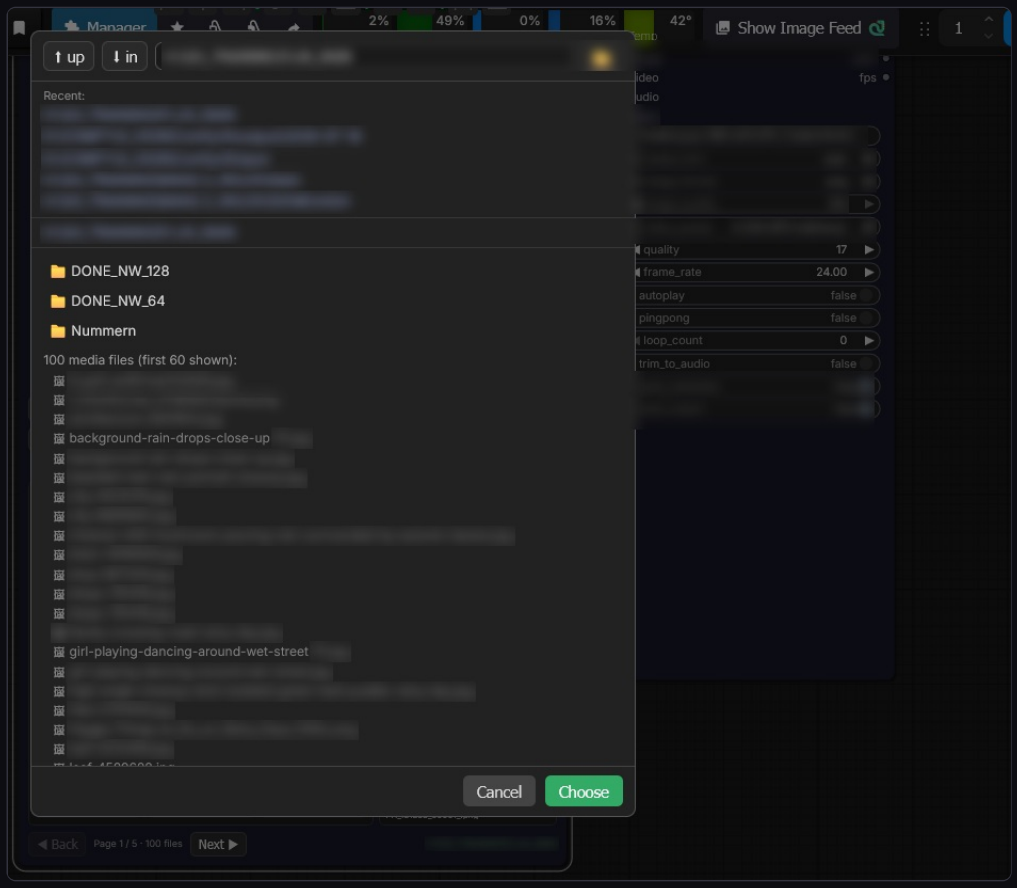

In-canvas picker: recents, subfolder rows and the media-file peek

When the current folder has **no subfolders**, the picker says so — **Choose** then pins the folder you are looking at:

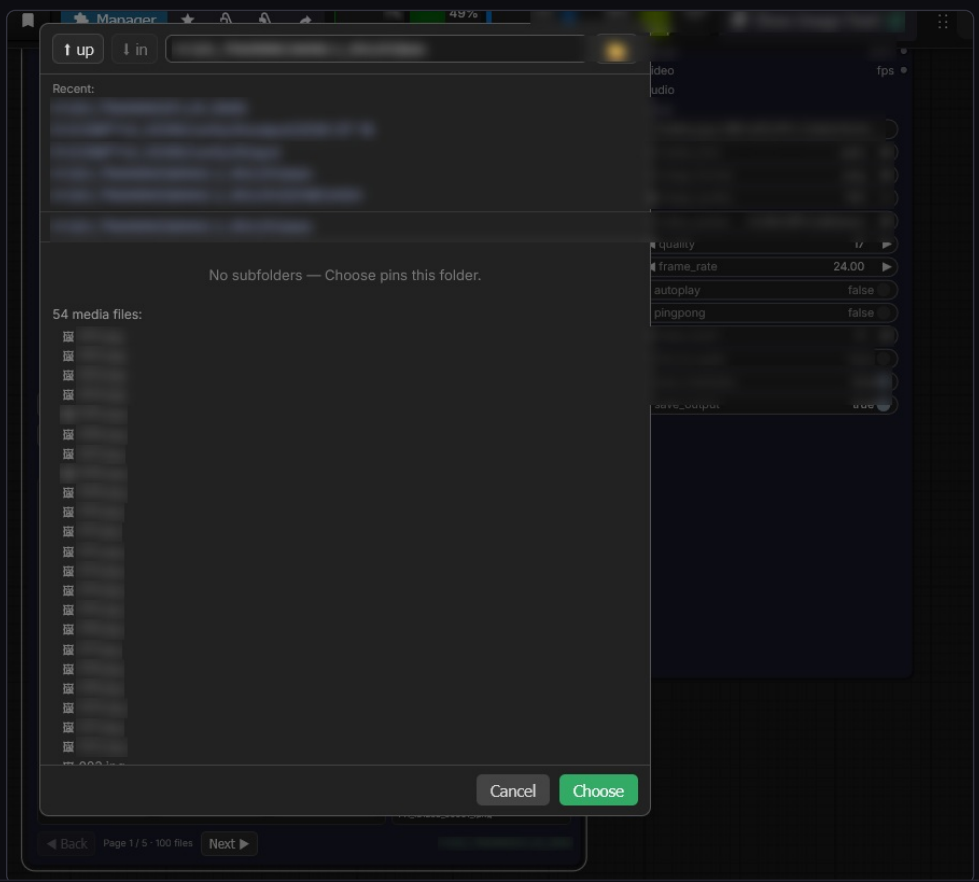

- The picker **peeks into the current folder**: below the subfolders it lists the folder's own media files (count + sorted names with kind icons), so you can see what a pin would load before you commit.
- The **address bar is live**: type or paste a full path and hit **Choose** — the typed path is validated and pinned directly, no Enter-then-click detour. Unreadable paths say so and keep the picker open.
- The **yellow folder button** inside the picker opens the native Windows dialog — as a **file** dialog: you see the folder's contents like in Explorer, click **any file** inside your target folder, and that file's **folder** gets pinned and the file itself is selected and loaded right away. The dialog's OK is the confirmation; the pick applies immediately. (Windows cannot show files in its folder-pick mode — that's an OS limit, which is exactly why the dialog works file-first.)

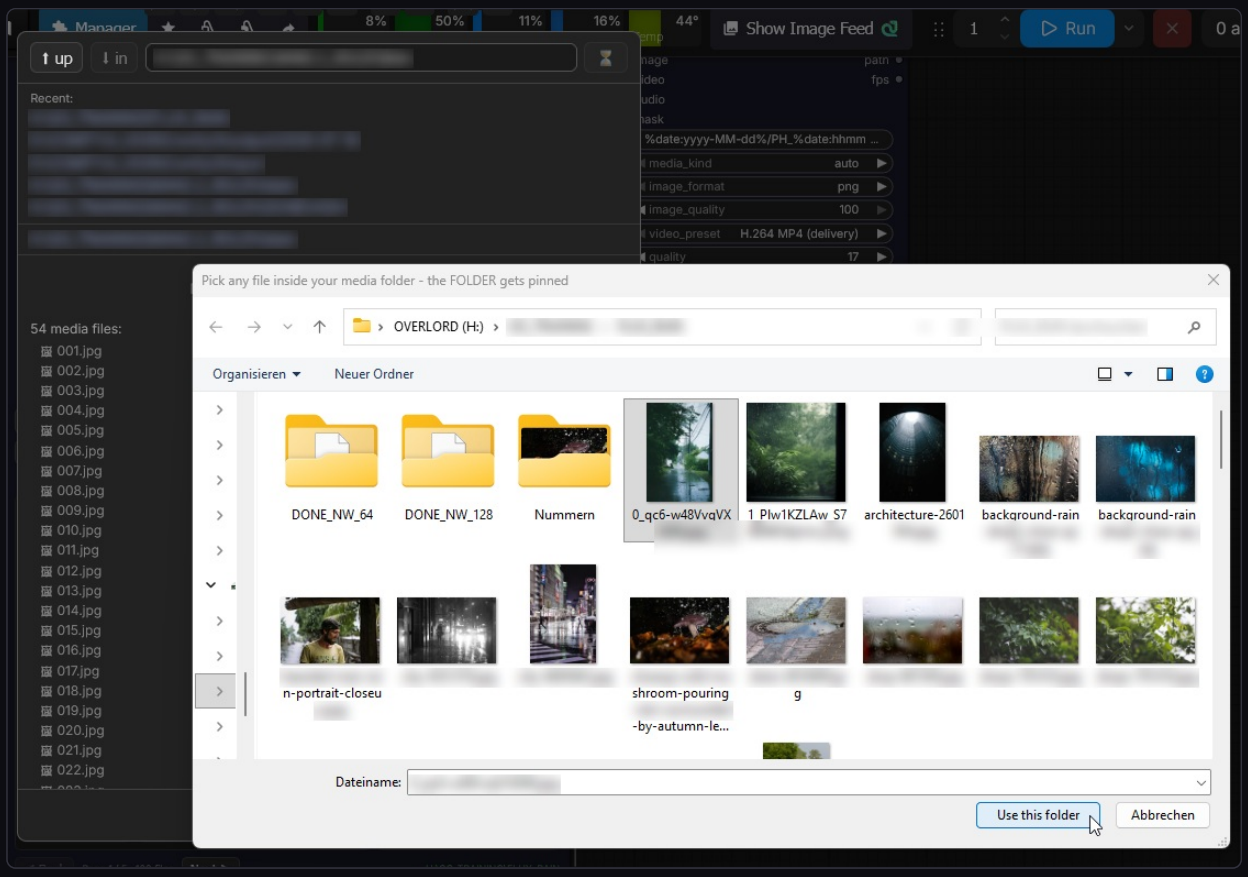

Native Windows dialog in file mode — pick any file, its folder gets pinned

🔎 **Browse Folder** opens the large, filterable list view for visually hunting through long folders — see *Live preview on hover* in section 2.

Staying fresh

- ⟳ **Re-read** re-reads the pinned folder from disk — new files appear, your current page and checkmarks stay.
- **Silent auto-refresh**: when the ComfyUI window regains focus (a render finished, you copied files in from Explorer), the loader probes the folder in the background and re-renders only if something actually changed. No flicker, no clicks.
- ↻ **Reset** jumps back to the ComfyUI input folder.

Getting files in

- ⬆ **Upload File** uploads into the ComfyUI input folder.
- **Drag & drop** raises **two drop zones** over the node — aiming at one is the choice, nothing needs to be known or held down:

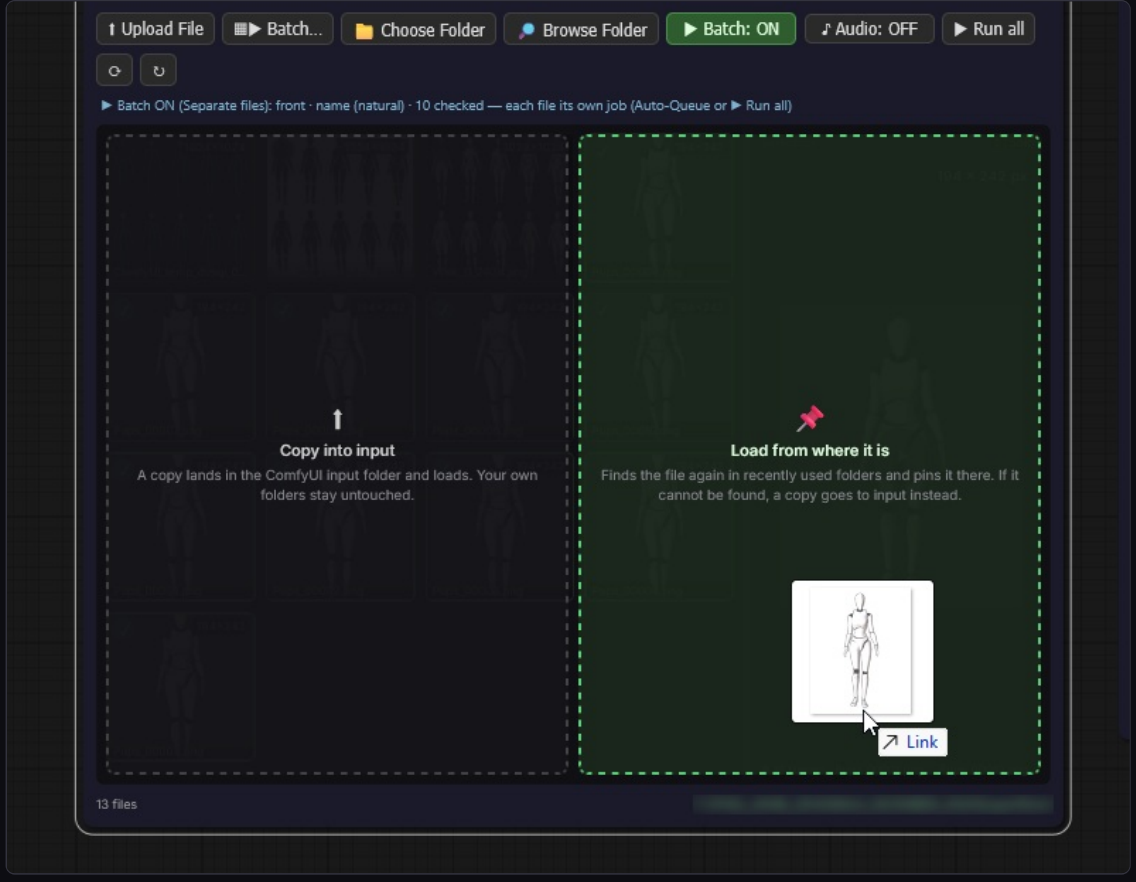

The two drop zones during a drag — the aimed zone lights up

- **⬆ Copy into input** (left): a copy lands in the ComfyUI input folder and loads. Your own folders are never written to.
- **📌 Load from where it is** (right): selects the file and pins the folder it already lives in — the whole folder appears in the grid, nothing is copied. When the drag carries the file's path (a dropped path text, a `file:///` URI, or the desktop client) that path is used directly; otherwise the file is **found again** by name, size and timestamp in recently used folders. If it cannot be found, the folder picker opens instead -- nothing is copied (its folder button is the native dialog).

The zones exist only while a drag is in flight; the node gains no permanent buttons. The zone under the pointer lights up, so the aim is confirmed before release. A multi-file drop copies every file and loads the first — the status line names the count. - A **busy ring** with a phase label ("Uploading...", "Reading folder...") covers the node while slow operations run — visible in every view, including Solo.

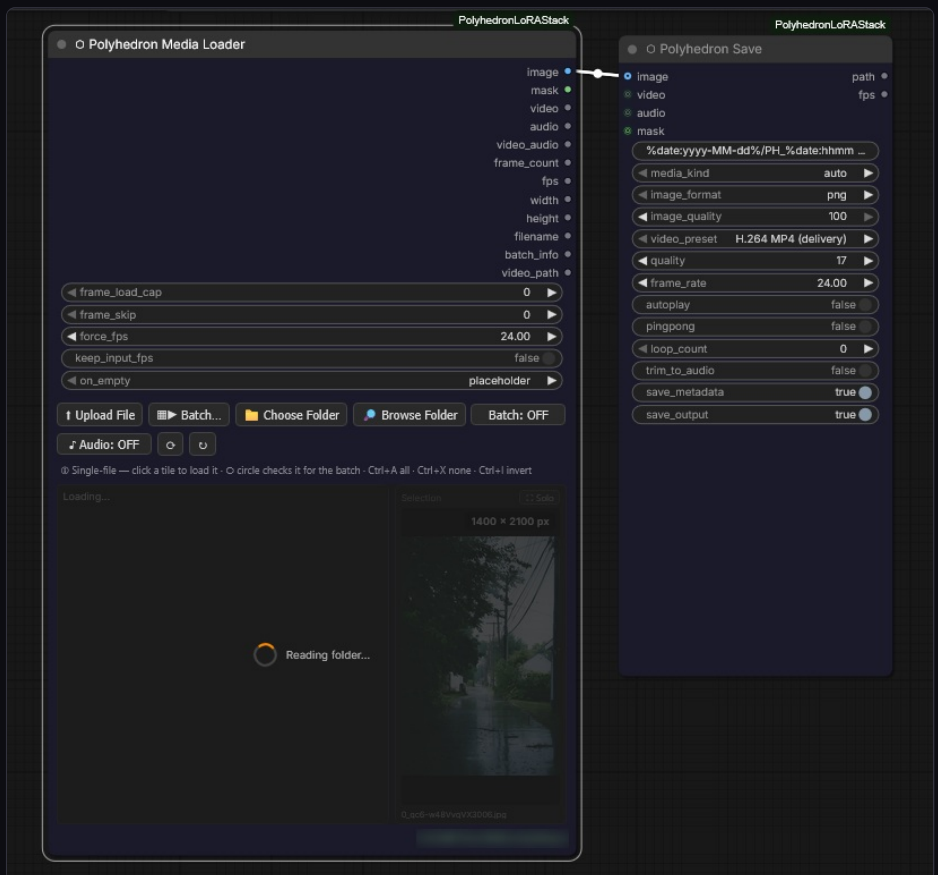

2 · Selection & views

The lower half of the node is the **tile grid**: one thumbnail per media file in the pinned folder, each with a **resolution badge** (width × height), a **kind icon** and the file name. Large folders are split into pages — the **pager** at the bottom shows the current page and the total file count, **◀ Back / Next ▶** flip through.

Single-file mode

Click a tile and that file is **loaded immediately** — it becomes the node's output and appears in the **Selection panel** on the right, with a large preview, the pixel dimensions and the file name. This is the everyday mode: one file in, one file out.

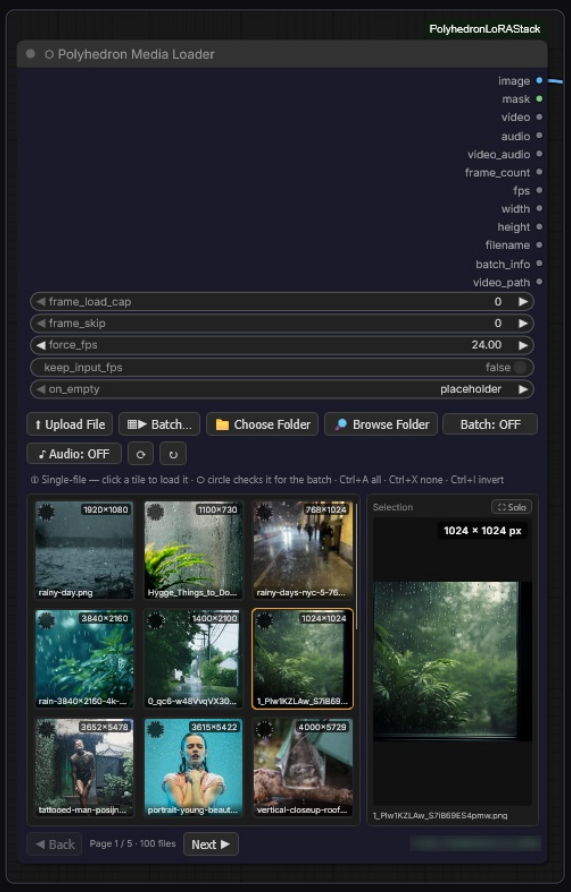

Tile grid with a loaded file in the Selection panel

Live preview on hover

Nothing has to be loaded to be judged — pointing at it is enough:

- **Images** pop a large preview over the node, with the pixel size as a badge. Move off the tile and it vanishes.

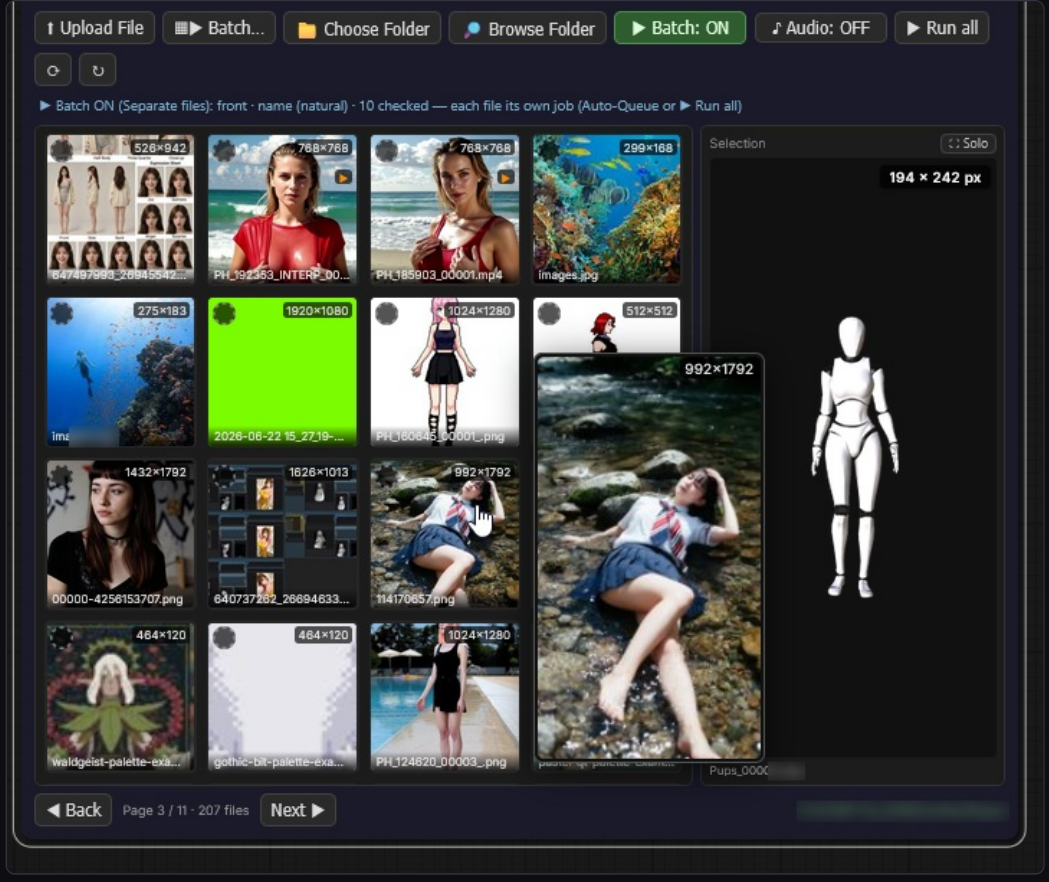

Image hover: a large pop-up with its own size badge

- **Videos play right inside their tile** — muted, looping, starting the moment the pointer arrives and stopping the moment it leaves. The ▶ badge marks them in the grid.
- **Audio plays on hover** — one clip at a time; a new hover, leaving the tile, or clicking anywhere stops the previous one. (The very first play on a fresh page may need one click first — that is the browser's autoplay policy, not the node.)

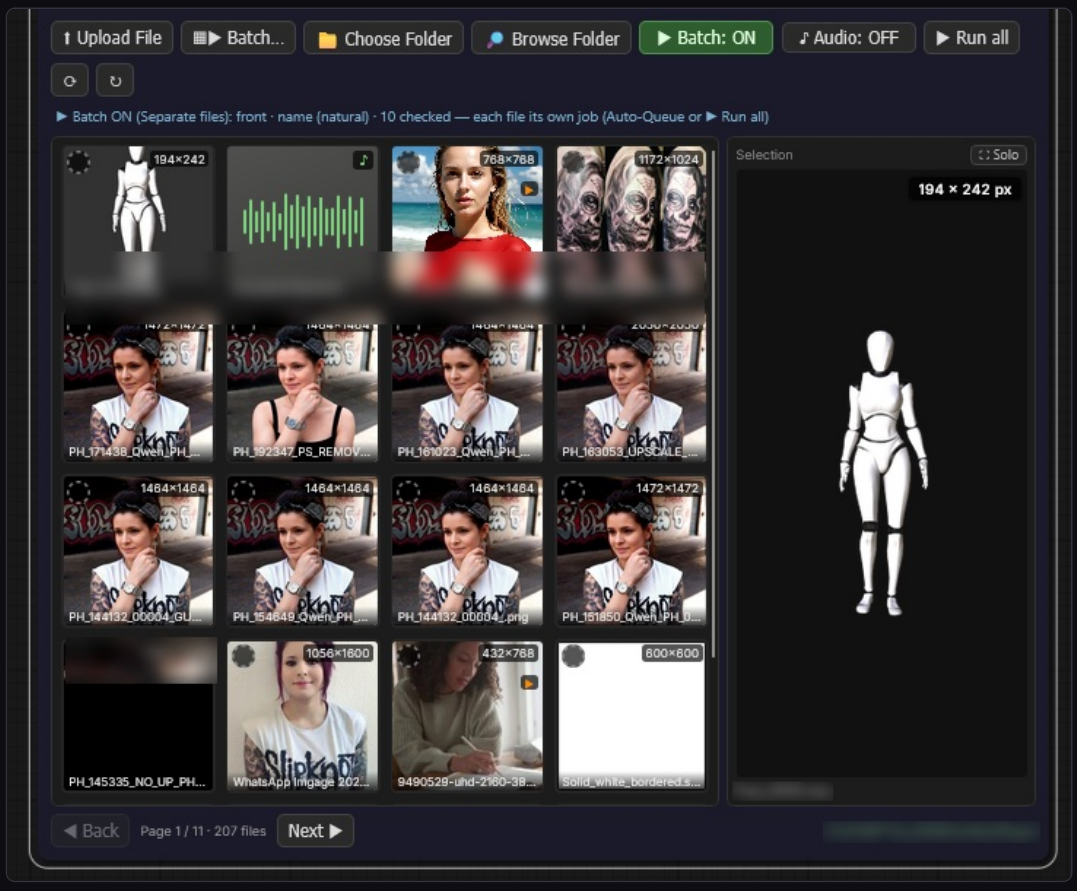

Mixed grid: audio waveform, a video tile and stills side by side

The same rules follow into 🔎 **Browse Folder**, the large list view for hunting through long folders: every row carries a thumbnail, name, kind tag and pixel size, the **filter box** narrows the list as you type, and hovering a row animates its video or plays its audio just like the grid.

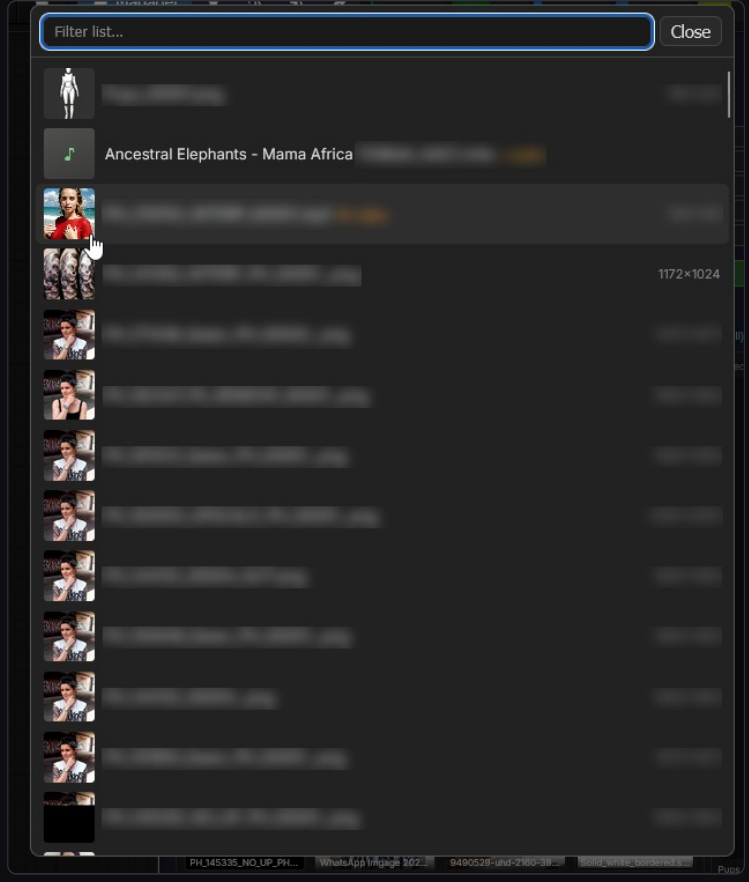

Browse Folder: filterable list with live thumbnails

Batch checkmarks

Every tile also carries a **circle checkmark**. Checking circles collects files for **batch mode** (see section 5) **without changing the currently loaded file** — the Selection panel stays where it was. The count is shown at the end of the hint line above the grid. Keyboard shortcuts work on the whole folder:

- **Ctrl+A** — check all
- **Ctrl+X** — uncheck all
- **Ctrl+I** — invert the checks

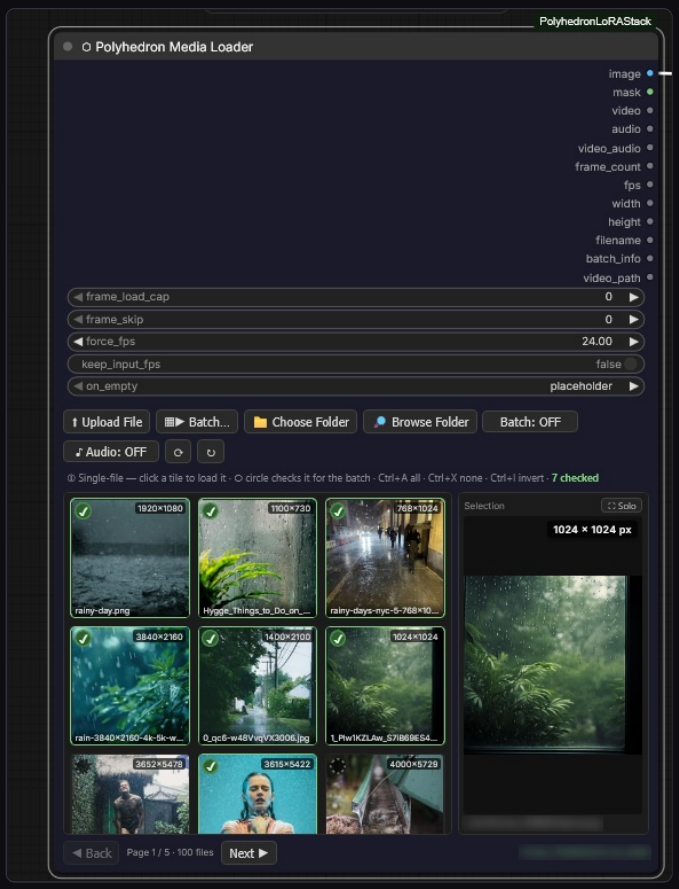

Seven tiles checked while the loaded file stays unchanged

file properly before committing to it. The node size is remembered **per mode**, so you can keep Solo large and the tile view compact. The button turns into ▦ **Tiles** to bring the grid back.

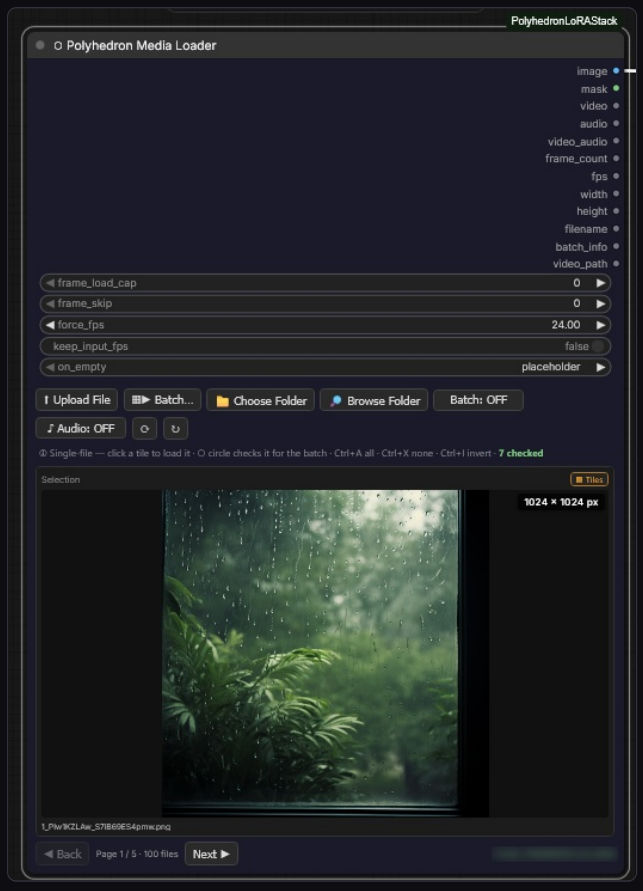

Solo view: the selection fills the node, the grid is hidden

3 · Video

Pick a video tile and the Selection panel turns into a **video preview** with a trim pane underneath. The `video` output carries the trimmed clip; `frame_count`, `fps`, `width` and `height` describe what actually comes out.

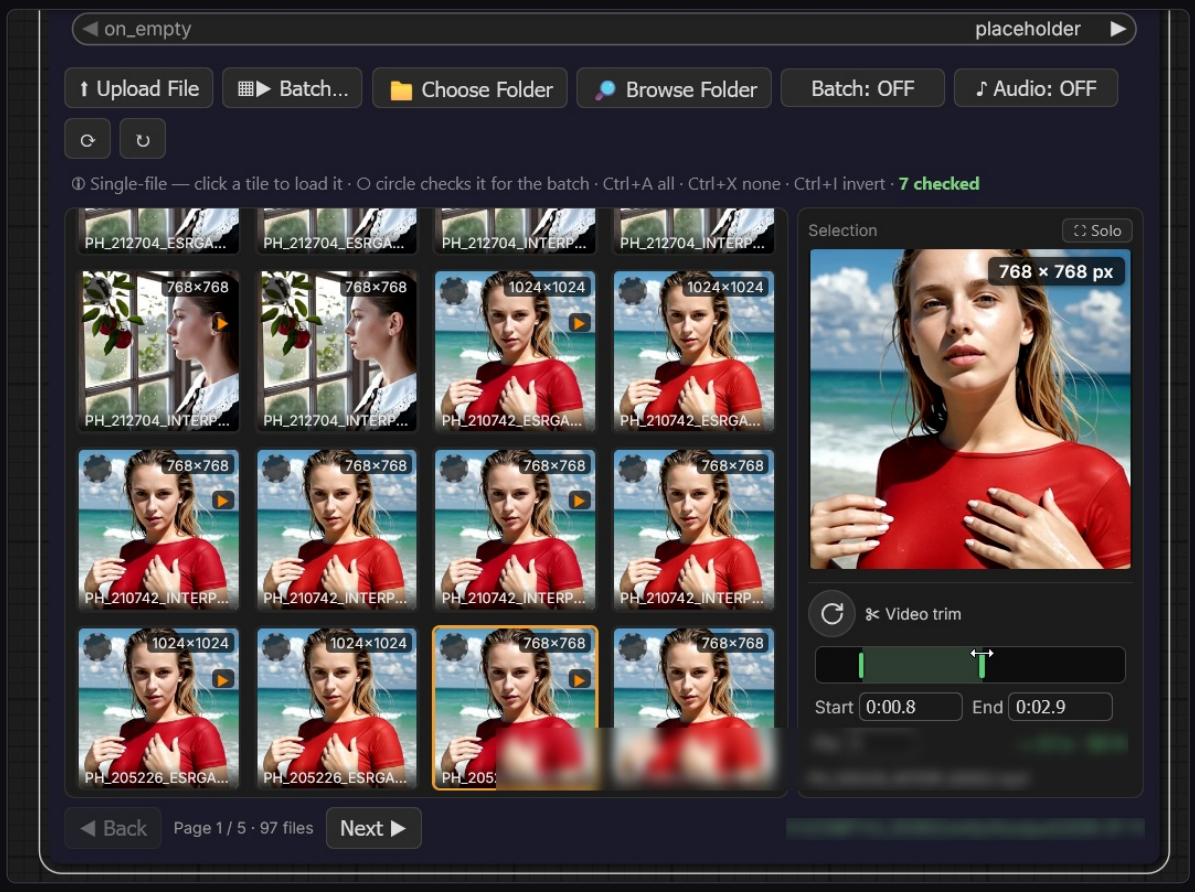

Video selected: preview with the trim pane underneath

Trimming

The pane below the preview is headed ✂ **Video trim**:

- The **track** represents the whole clip. Drag the two **handles** to set the kept range — the kept zone stays lit, the trimmed-away parts dim out.
- **Start** and **End** are editable timecode fields (`0:00.8`); typing and dragging drive each other, so you can dial an exact in-point and then nudge the out-point by hand.
- The **round button** left of the label plays the selection **on a loop**, following the handles live while you drag them.
- The **length readout** on the right shows the kept range in both currencies — seconds and frames (`-> 2.1 s · 50 fr`).

Trim positions snap to real frame boundaries — the grid is 1/native fps, the very cut the backend makes, so the preview shows what the node hands on.

Fixed-length windows

Click the length readout and the window **locks**: the readout turns amber and shows a padlock. From then on **the length is the law** — dragging a handle or the kept zone **slides the window** through the clip instead of resizing it, and the window always stays fully inside the clip. The **Fix** field next to Start/End sets the locked length numerically, in frames (`fr`). Click the readout again to unlock.

This is the tool for cutting many clips to the exact same length: pin a folder, click through the videos, slide the fixed window to the good part of each.

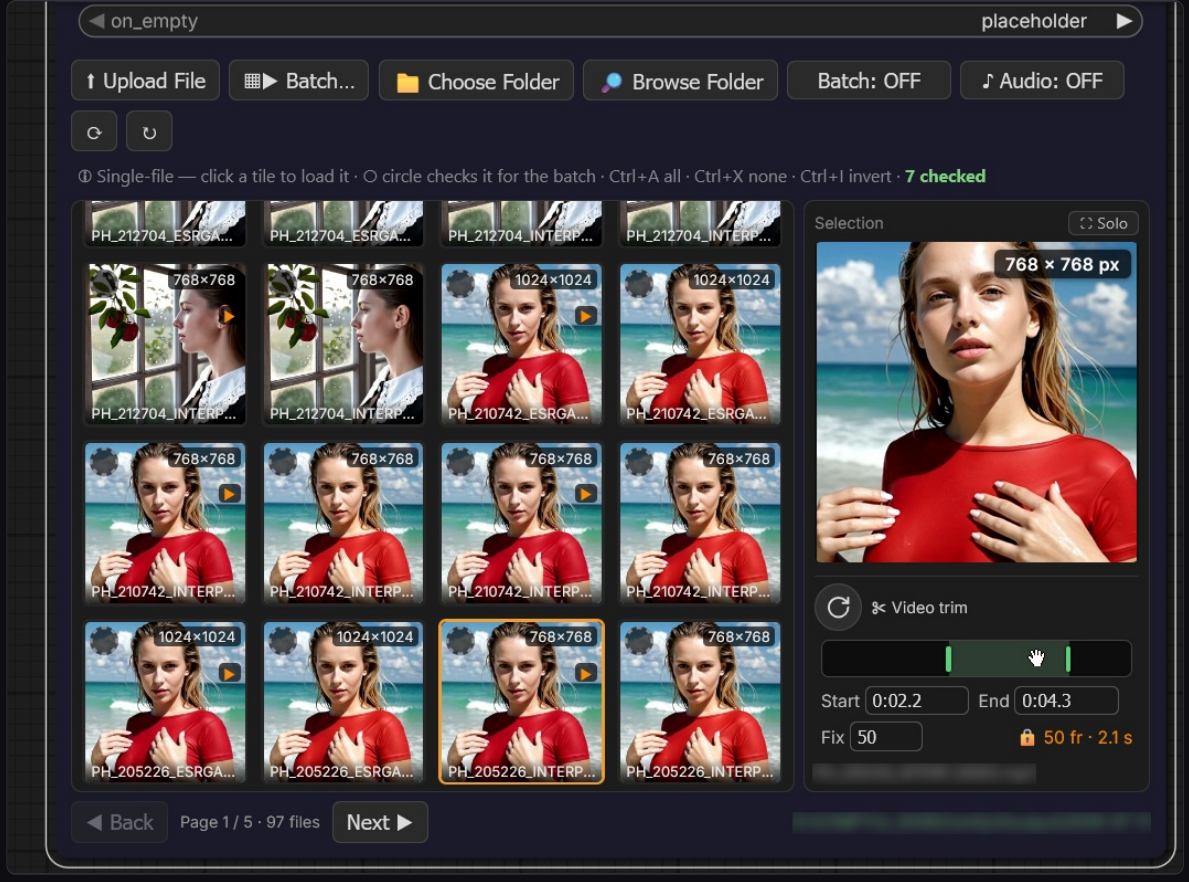

Locked window: amber padlock readout, the window slid down the clip

Frame knobs

Four widgets on the node body decide how the video reaches the graph:

Widget	Effect
`frame_load_cap`	Video only: maximum number of frames to load. `0` = all (with a safety cap).
`frame_skip`	Video only: skip this many frames at the start.
`force_fps`	Output fps, default `24`. `0` = the file's native fps. Sets the play rate — and the frame count when a still is expanded to the length of trimmed audio.
`keep_input_fps`	On: ignore `force_fps` and use the source's native fps (a still or sequence falls back to 24). Off: `force_fps` applies.

When there is nothing to load

`on_empty` decides what happens when there is genuinely nothing to hand on — no selection, an empty or empty-filtered folder, a file that vanished from disk:

- **`placeholder`** (default) emits a built-in placeholder frame, so a half-built graph keeps running.
- **`error`** stops the run instead.

Misconfiguration and decode failures always error, in both settings.

4 · Audio

Audio is a **third media kind** in the grid: audio files show up as tiles, are selectable and previewable, right next to images and videos.

Pairing

Clicking an audio tile **pairs** that file with your current visual and arms the ♪ **Audio** button. Audio is not an exclusive mode — the visual stays loaded, the audio rides along:

- ♪ **Audio: ON** reveals the audio companion pane in the Selection: the file name, the folder it came from, a **waveform**, a small transport (play button with the running time and a volume control) and the trim strip. An ✕ button drops the pairing. Turning it on jumps the grid to the audio's folder, where it shows marked — the visual selection is marked in orange, the audio selection in green, so you can see both slots at once. Audio tiles carry a **waveform thumbnail** and a ♪ badge, so a music folder reads at a glance.
- ♪ **Audio: OFF** sets the companion aside. The pairing is **remembered**, so you can hide it and bring it back without picking again.
- When the audio lives in a different folder than the one you are browsing, a ⧉ **button** in the pane jumps the grid over to it.
- Selecting a **video** arms its own **embedded track**, labelled `· from video` in the pane. No separate file needed to keep a clip's sound.

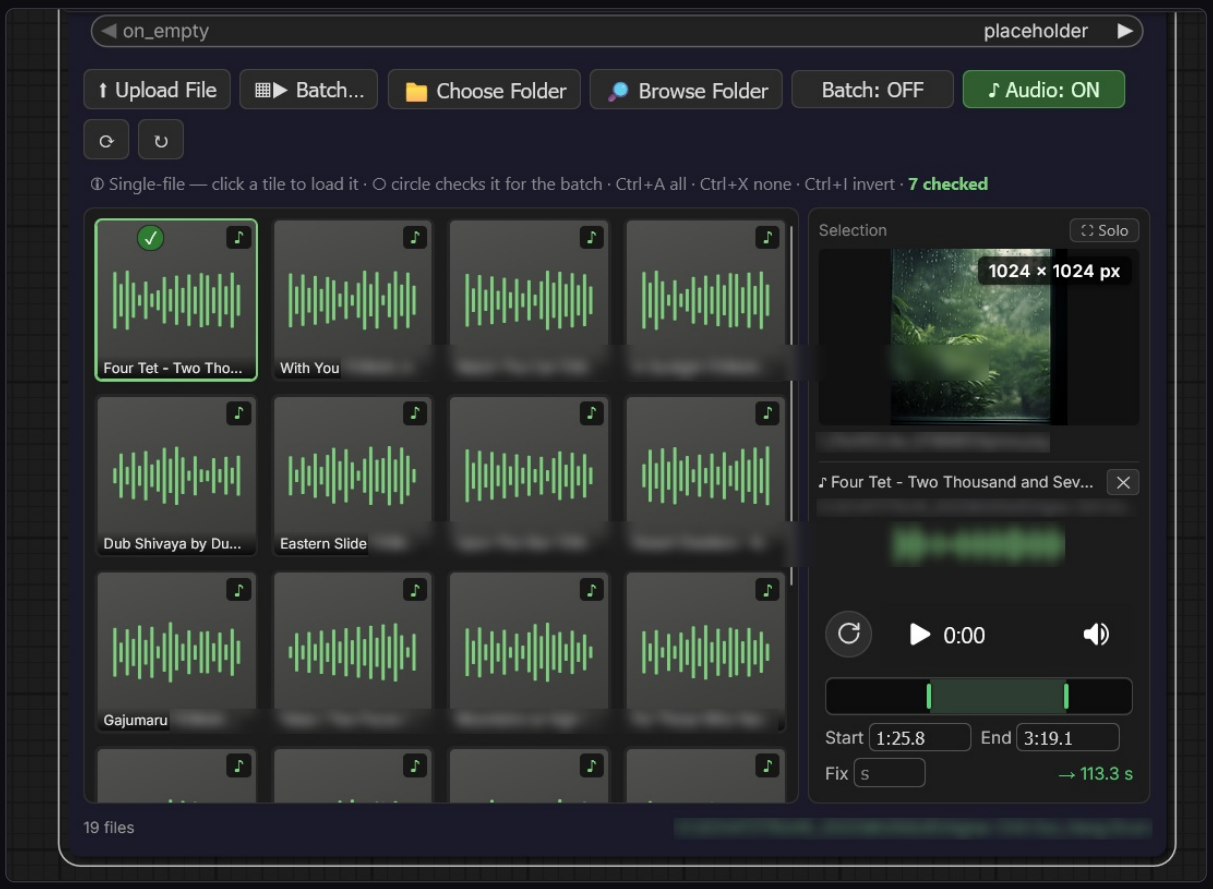

Audio paired with a still: companion pane under the Selection

Trimming audio

The companion pane carries the same trim strip as the video pane: track, two handles, editable in/out fields, loop play and the length readout. Two differences:

- Audio snaps to **tenths of a second** instead of frame boundaries, and its **Fix** field is in seconds (`s`) where the video's is in frames (`fr`).
- The **fixed-length window** works exactly as it does for video — click the readout to lock, then slide the window through the track.

Pair audio with a **video** and both panes stack under the preview: the video trim on top, the audio companion below, each with its own handles, fields and readout. Trimming one does not disturb the other.

The video and audio trim handles follow the same window rules, so a clip and its sound stay in agreement.

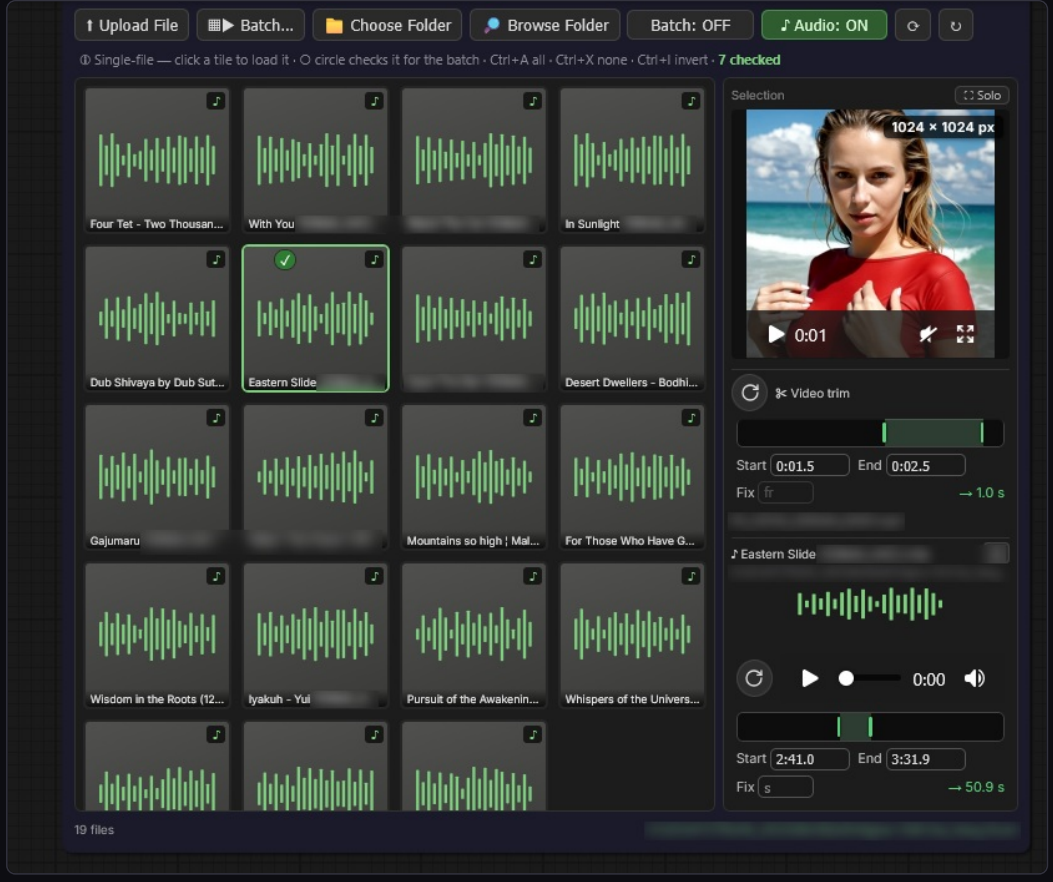

Video and audio trimmed side by side, each with its own pane

Who has the upper hand

When a visual and an audio are paired, one of them sets the length. The rule is not "whichever is shorter" — it depends on what the visual is:

Pairing	Who wins	What happens
Visual only, no audio	—	Nothing is re-timed. A still stays one frame, a video keeps its frames.
Still + audio	**the audio**	The audio is the law: the still expands into a real clip of the trimmed audio's length. `force_fps` sets the rate, and the audio is fitted to the exact frame count so the two end together. A very long track is cut at a hard frame cap — the console says so and asks you to trim shorter.
Video + audio	**the video**	The video is the law: its frames are kept untouched and the **audio is capped or silence-padded to the video's duration**. A short track is padded with silence to the end, a long one is cut.

So a still bends to the sound, and sound bends to a real video. The picture never gets stretched or dropped to fit a track.

Which trim drives which output

The two trim panes are independent while you work, but they do not feed the outputs in the same way:

- `audio` always carries **its own** trim window — the one you set in the audio pane. It stays independent no matter what the video does.
- `video` carries the **video** trim. When a video is trimmed, the clip is re-encoded from the sliced frames and takes the file's **own** sound track, cut to the same window, so it stays self-contained and in sync.
- `video_audio` (the muxed clip) follows the **video trim as master**: the paired audio is sliced to the *same* window the frames use and fitted to the trimmed duration. Your separate audio-trim handles do not shift the muxed clip out of sync. In every other case — still, untrimmed video, image batch — the muxed clip simply takes the trimmed paired audio.

Short version: **the video trim is the master lever for the muxed clip, and the audio trim owns the standalone audio output.**

What comes out

- `audio` hands on the decoded, trimmed audio. Decoding goes through PyAV — the same path ComfyUI's own audio loader uses — so m4a, aac and opus work without backend gaps.
- `video_audio` hands on the visual's frames **muxed with the paired audio**: wire it into a video save node for an mp4 with a sound track. It is `None` when nothing is paired.

An **audio-only** selection still emits a small placeholder frame on the `image` output, so a graph that expects an image keeps

5 · Batch

Batch mode answers two questions in order: **which** files run, and **how** they run.

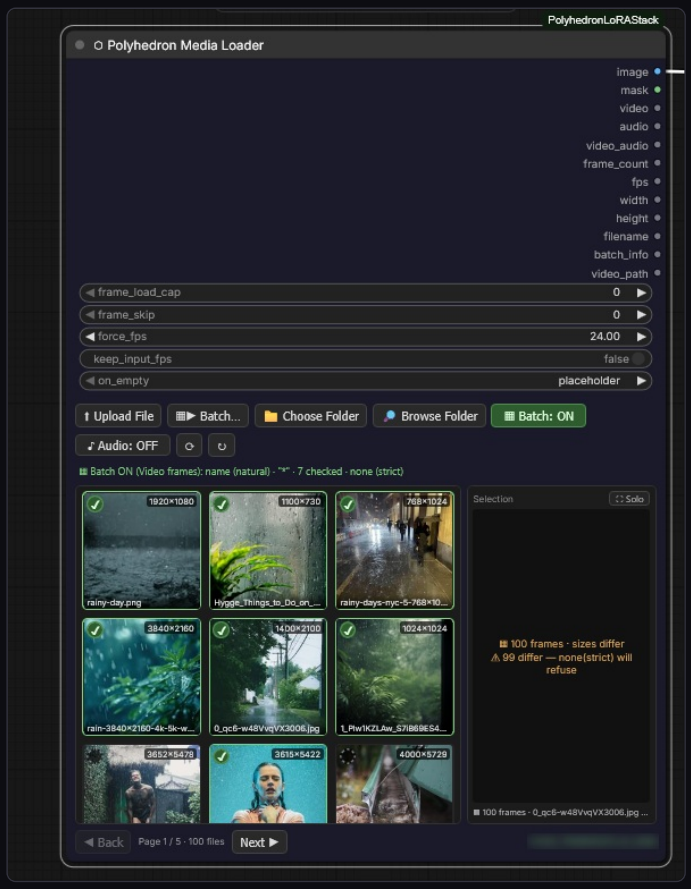

Batch armed: green Batch button, status line and batch info in the Selection

Which — the circle checkmarks from section 2. Checks are remembered in the workflow. **How** — the ▦▶ **Batch...** button opens the batch panel; **Apply** arms it, and the **Batch** button on the node turns it on and off afterwards without losing the checks. While it is armed, a status line above the grid spells the whole configuration out.

The batch remembers — even while you are somewhere else

The checked set and the source folder are **not** tied to what you are currently browsing. You can turn the batch **OFF**, wander into a completely different folder, load other files — the hint line keeps showing the count (e.g. `10 checked`) the whole time, because those checks still exist and still belong to their source folder.

Click **Batch: ON** and the grid **jumps straight back to the source folder**, with the checked frames marked — you are looking at exactly what will run, no matter where you were a moment ago. Turning it off returns you to browsing without touching the checks.

So the mental model is: **the checks live with their folder, not with your current view.** The count in the hint line is a reminder that a prepared batch is waiting, and the Batch button is the way back to it.

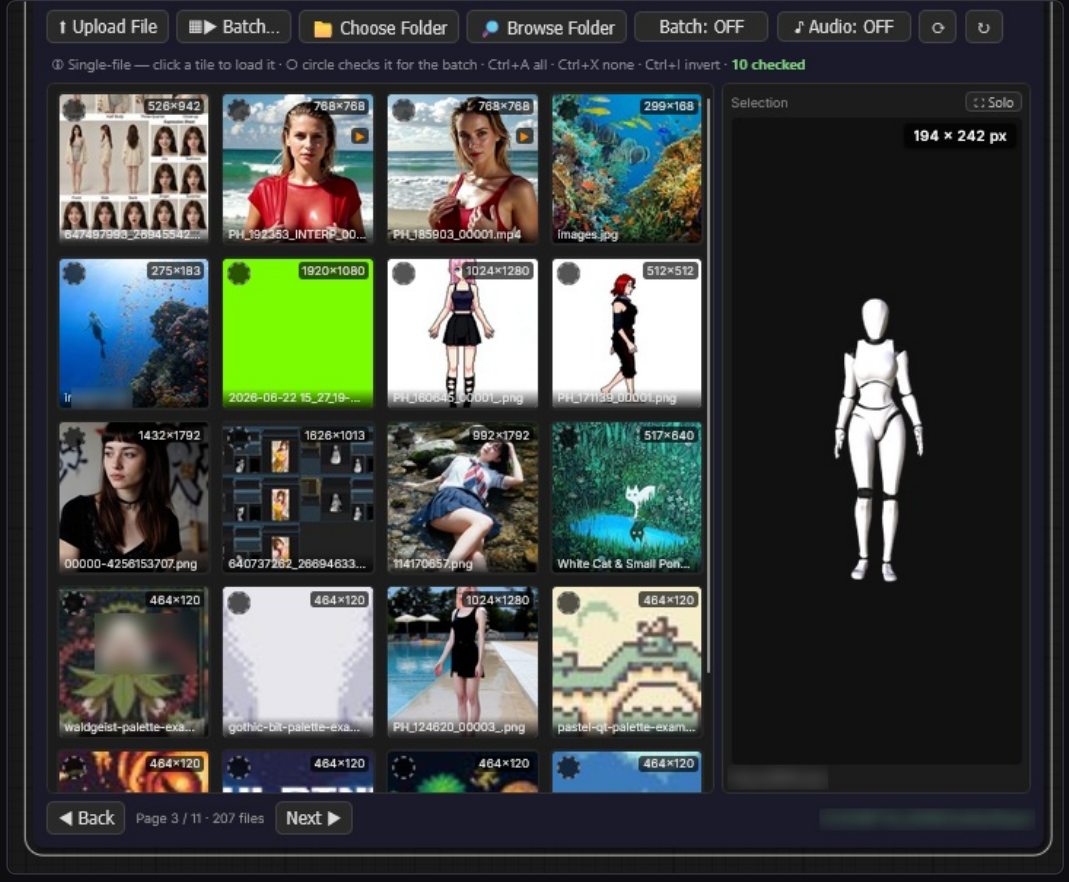

Batch OFF in another folder: the count persists in the hint line

Batch ON: the grid jumped back to the source, checks marked

The two modes

Mode	What it does
▦ **Video frames**	The checked images are the frames of **one** video and load as a single batch, after a size check.
▶ **Separate files**	Each checked file — image or video — is **its own job**, fed in one per run. Auto-Queue or the ▶ **Run all** button sweeps through them.

Picking the set

whatever it was set to last.

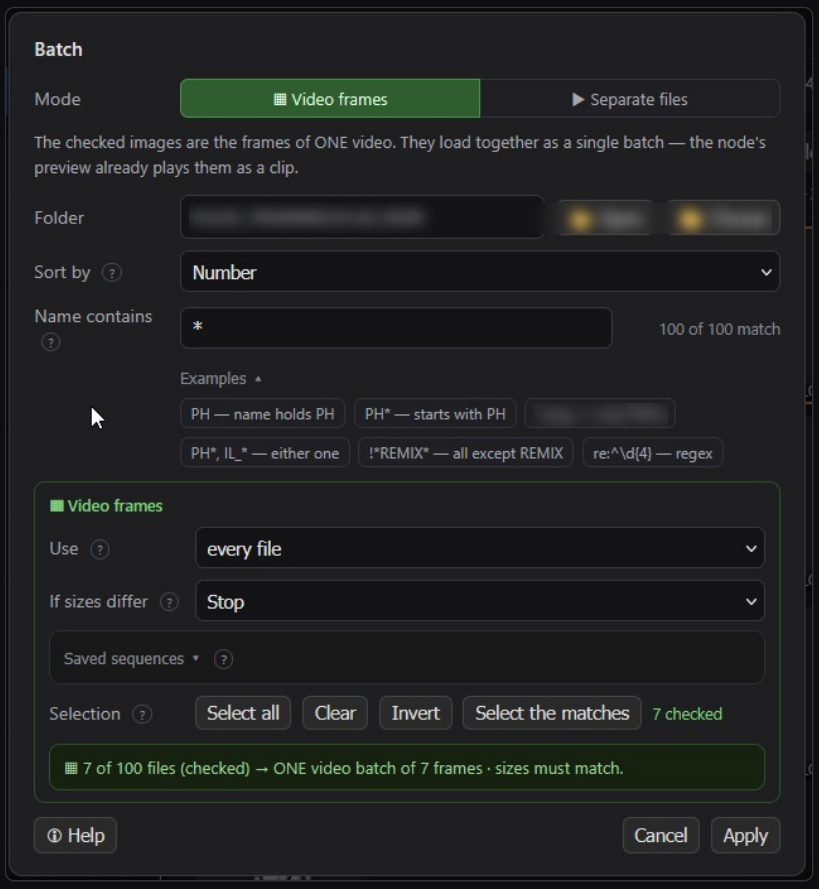

The batch panel in Video-frames mode, examples row expanded

- **Sort by** — **Number** (natural order, so `img2` comes before `img10`), **A–Z** (literal character order), **Date modified** or **Date created**, oldest first.
- **Name contains** — plain text matches any name holding it, `*` means all files. The **Examples** row fills in the richer syntax: `PH*` (starts with), `*.png` (only PNGs), `PH*, IL_*` (either), `!*REMIX*` (exclude), `re:^\d{4}` (regex). **Select the matches** checks exactly the files the filter finds.

▦ Video frames options

- **Use every Nth file** — thin the batch out: every 2nd halves it, every 3rd thirds it, or set a custom N.
- **If sizes differ** — what to do with mismatched frames: **Stop** (refuses to run and names the odd one out), **Stretch** (resize everything to the first frame's size), **Letterbox** (pad with bars, nothing squashed) or **Crop center**.
- **Saved sequences** — build the current batch into a renumbered copy under `output\PLS_sequences` and load it as the active batch. Your original files are never touched. Saved sequences can be re-loaded or deleted from the same row.

▶ Separate files options

- **Begin at file** — which file of the set goes first; **Apply** sends the cursor back to it.
- **Start over after the last file** — on, the cursor wraps around to the first file; off, it stays parked on the last one.

Running the set — one press vs. ▶ Run all

The part that is easy to misread: in Separate-files mode **one queue press = one file**. Each normal ComfyUI queue run feeds exactly the file under the cursor into the graph and then advances the cursor — pressing queue once and seeing a single output is the mode working as designed, not a stall.

To work through the whole set in one go, use ▶ **Run all** — the button appears in the node's toolbar only while the batch is armed (`Batch: ON`). One press queues every remaining file as its own run.

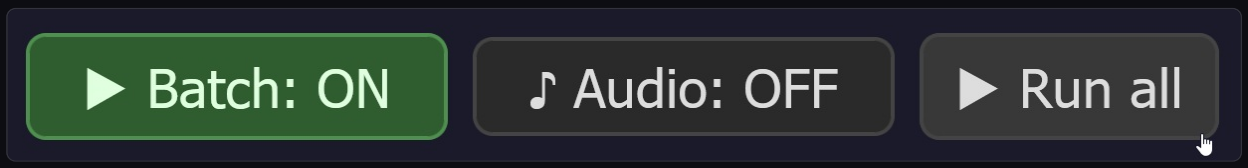

The ▶ Run all button lives on the node itself, next to the batch toggle

Note the difference between the two batch modes here: a **Video frames** batch is ONE clip and runs through ComfyUI's own Run/Queue button like any other graph execution — there is nothing extra to press on the node. The Separate-files sweep is **not** started from ComfyUI's Run button; it is started from the node's own ▶ **Run all**. While the sweep is going, the node's hint line counts along:

That line is the confirmation that the set is actually being worked through. When the sweep finishes, the cursor parks after the last file — or wraps back to the first, if *Start over* is on.

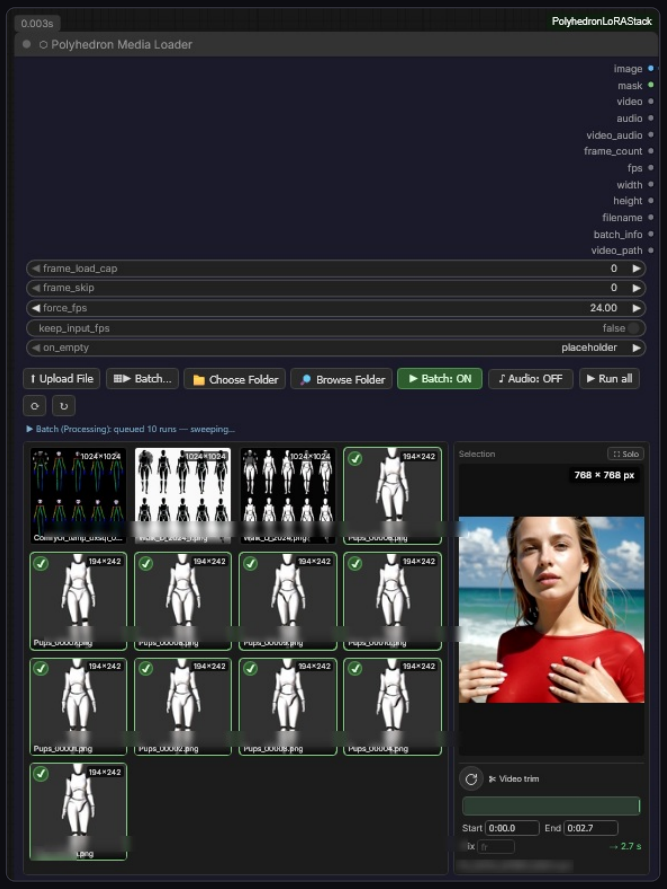

▶ *Run all mid-sweep — the hint line counts the queued runs*

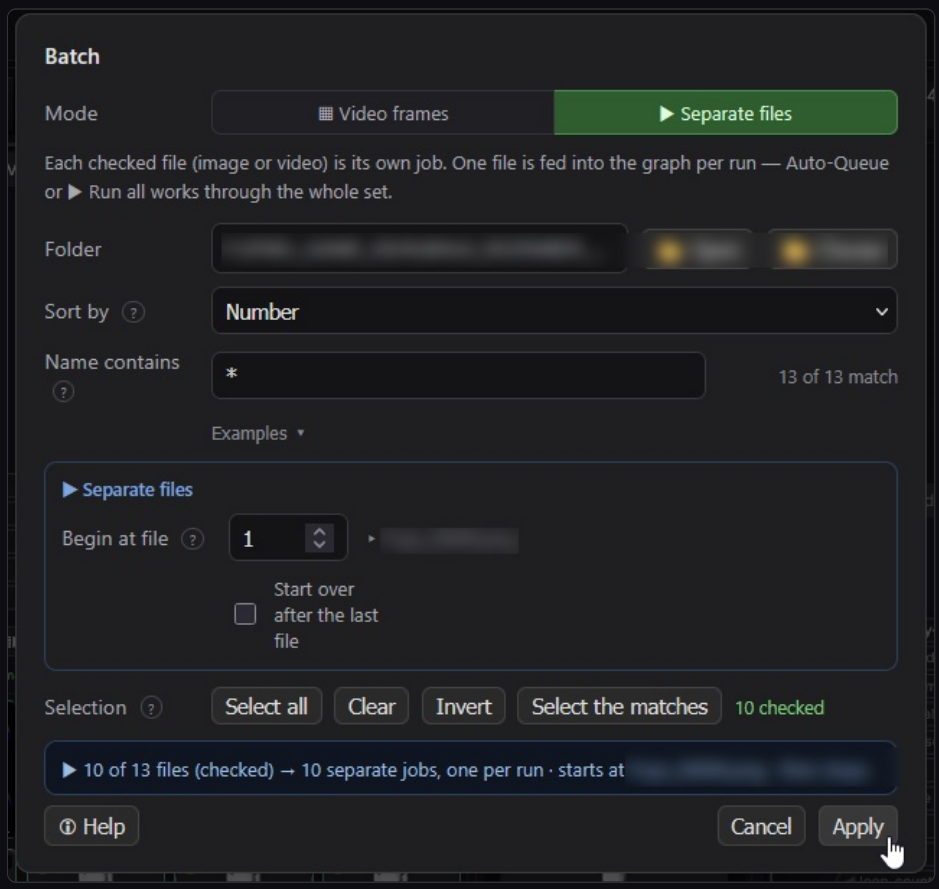

The batch panel in Separate-files mode

What the graph sees

- **`batch_info`** is a live counter for a wired text node: `Batch 0023 / 1334` per firing in Separate-files mode, `Batch 1334 frames (one pass)` for an image batch, and `Single: <name>` outside batch mode.
- **`video_path`** hands on the full path of the source file — the Batch Pipeline Source node consumes it. It is empty in modes without a single source file (image batch, sequence).

6 · Outputs & masks

The full pin table lives up front in *At a glance — every output pin*. This section covers the part that is genuinely this pack's own: the mask conventions and the round trip.

The mask rules

- **Alpha convention** (matching core LoadImage): **opaque → 0, transparent → 1**. A still with a real alpha channel carries it as the mask.
- **A grayscale still IS a mask**: a mode-L image without alpha carries its **luminance** as the mask, **white → 1**. That is deliberately the inverse reading — a saved mask is white-on-black, and this rule makes it survive the round trip (below).
- **Video**: a plain video gets a blank (all-zero) mask. An **alpha-bearing video** — VP9-alpha WEBM, ProRes 4444, transparent GIF — is decoded through PyAV so the alpha becomes a **real per-frame mask**; without PyAV the node says clearly what to install instead of failing obscurely.

The Save → Load round trip

The Save node closes the loop:

- Wire **only a mask** into Save and the mask itself is written as **grayscale stills** (mode L, white = mask on) — one file per batch entry, with the same naming, metadata and preview machinery as normal images.
- Load such a file back and the grayscale rule above turns it into the identical MASK again. **What Save writes, the Loader reads back** — masks included.

The two-loader idiom

Because a saved mask is just a file, guided background removal becomes a folder workflow: one loader carries the **images**, a second loader carries the **masks** (the grayscale stills Save wrote), and the removal node takes both. Edit a mask in any painting tool, drop it back into the mask folder, ⟳ re-read — the correction flows through without any in-graph mask surgery.

7 · Polyhedron Save

One output node for stills, image sequences, videos (with muxed audio) and masks. It picks the writer from what is actually wired to it, embeds the workflow so the file can be dragged back into ComfyUI — and when it writes a clip it drops a **still frame beside it as a control image**, because an .mp4 cannot carry a workflow but a PNG can.

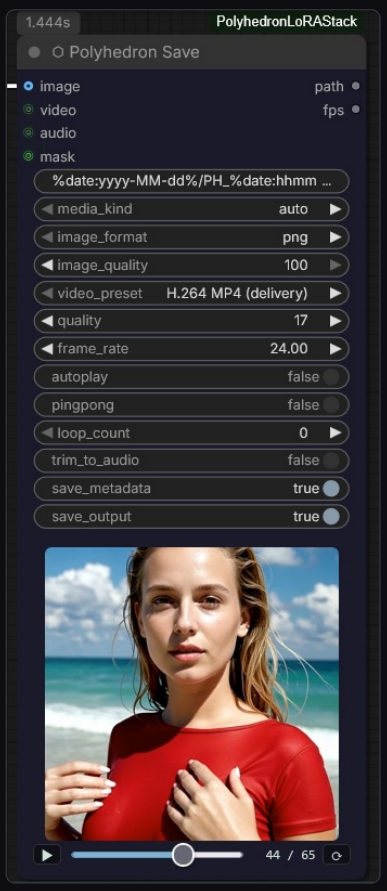

Polyhedron Save: inputs, widgets and the in-node player

Inputs and outputs

Pin	Direction	Carries
`image`	in	Still(s) or video frames `[N,H,W,3|4]`.
`video`	in	A native VIDEO — frames, audio and fps ride through. Takes the loader's `video` **or** `video_audio` output alike: a `video_audio` wire carries its trimmed companion track along, muxed into the written clip.
`audio`	in	Optional: muxed with image frames, or **replaces** a wired video's audio.
`mask`	in	Optional alpha `[N,H,W]` (opaque → 0) for png/webp stills and alpha-capable presets (ProRes 4444). **Wired alone**, the mask itself is saved as grayscale stills (section 6).
`path`	out	The full path of the written file.
`fps`	out	The rate the clip was written at.

What gets written — `media_kind`

`auto` infers from the wiring: a **VIDEO** input → video; **IMAGE + audio** (or an fps) → video; **IMAGE alone** → image; **AUDIO alone** → audio; **MASK alone** → grayscale mask stills. Or force `image` / `video`.

Naming files and folders — the token table

`filename_prefix` is a **path**, not just a name: every `/` creates a subfolder under `ComfyUI/output/`, and tokens are expanded before the path is built. All the pieces:

Piece	Writes	Example
plain text	itself	`Polyhedron` → `Polyhedron_00001_.png`
`/`	a subfolder level	`renders/test` → `output/renders/test_00001_.png`
`%date:yyyy%`	4-digit year	`2026`
`%date:yy%`	2-digit year	`26`
`%date:MM%`	month (01–12)	`07`
`%date:dd%`	day (01–31)	`19`
`%date:hh%`	hour (00–23)	`10`
`%date:mm%`	minute	`29`
`%date:ss%`	second	`36`
`%width%` / `%height%`	frame size in pixels	`1024`
`%Node.widget%`	another node's widget value (expanded by ComfyUI core)	`%KSampler.seed%`

Date letters combine freely inside one token — `%date:yyyy-MM-dd%` gives `2026-07-19`, `%date:hhmm%` gives `1029`. **Uppercase `MM` is the month, lowercase `mm` the minute.** A counter (`_00001_`) is always appended, so files never overwrite each other.

Put together, patterns like these sort themselves:

Pattern	Result
`%date:yyyy-MM-dd%/PH_%date:hhmmss%`	one folder per day, files stamped to the second: `output/2026-07-19/PH_102936_00001_.png`
`runs/%width%x%height%/frame`	grouped by resolution: `output/runs/1024x1024/frame_00001_.png`
`%date:yyyy%/%date:MM%/clip`	year/month tree: `output/2026/07/clip_00001_.mp4`

Illegal path characters are stripped per segment (a stray `:` can never break the path on Windows), traversal segments (`..`) are dropped, and an empty result falls back to `Polyhedron`.

Stills

- `image_format` — **png** (lossless, embedded workflow, drag back to reload), **webp** (smaller; `image_quality` 100 = lossless), **jpg** (no alpha).
- `image_quality` — webp/jpg only; png is always losslessly compressed.

Video presets

Preset	Container	For
H.264 MP4 (delivery)	.mp4	Small, universal — ComfyUI's own tested writer.
H.265 MP4 (delivery, grain)	.mp4	10-bit HEVC, grain-tuned so particles and gradients are not smeared by HEVC's default in-loop filters.
ProRes 422 HQ (master)	.mov	10-bit edit/archive master, intra (every frame a keyframe).
ProRes 4444 (master + alpha)	.mov	The alpha-capable master — the wired mask rides along.
FFV1 (lossless archive)	.mkv	Mathematically lossless, FLAC audio.
WebM VP9	.webm	Web delivery, Opus audio.
Animated WebP / GIF	.webp / .gif	Loops; `loop_count` (0 = forever).

The masters encode through bundled PyAV with a 16-bit intermediate, so the diffusion float precision reaches the encoder — less banding. `quality` is crf-style for the lossy presets (~17–20 is visually lossless); ProRes/FFV1 ignore it.

The remaining levers

Widget	Effect
`frame_rate`	fps when a video is built from an IMAGE batch; a wired VIDEO keeps its own rate. Convertible to an input — wire Interpolate's fps output here.
`autoplay`	In-node preview: off = first frame with play controls; on = plays automatically, muted.
`pingpong`	Appends the reversed frames for a seamless boomerang loop.
`loop_count`	GIF / animated-WebP loops, 0 = forever.
`trim_to_audio`	Cuts the longer of clip and audio so both end together.
`save_metadata`	Embeds workflow + prompt (PNG text / MP4 metadata).
`save_output`	On: write to `ComfyUI/output/`. Off: temp dir — preview only, keeps output/ clean while iterating.

Polyhedron LoRA Stack

User Documentation · v313

by Polyhedron

A custom ComfyUI node for managing and applying large collections of LoRAs with group-based apply modes, cleanup switches, thumbnails, trigger words, an Accelerator engine and a Merge Analyzer.

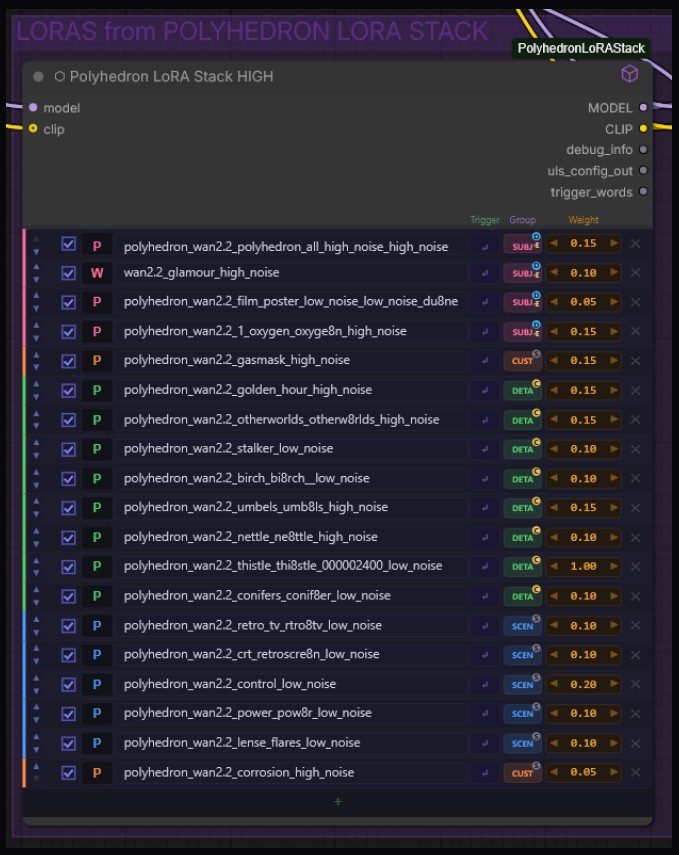

Both Stack nodes side by side — HIGH and LOW noise paths in a WAN 2.2 dual-noise workflow.

© Polyhedron · All rights reserved

civitai.red/user/Polyhedron_AI · patreon.com/c/polyhedron_ai

1 · Overview

The Polyhedron LoRA Stack is a replacement for the standard Power LoRA Loader node. It is designed for workflows that use many LoRAs simultaneously — such as WAN 2.2 dual-noise image generation — where managing individual LoRA nodes becomes impractical.

The pack currently ships **thirteen nodes**. The three core nodes:

- **Polyhedron LoRA Stack** — the main node. Holds any number of LoRAs, organises them into groups, and applies them in a defined order.
- **Polyhedron LoRA Engine** — a companion node for acceleration LoRAs (LightX2V, FusionX, CausVid, …). Flat list, single global apply mode, placed before the Stack in the pipeline.
- **Polyhedron LoRA Inspector** — a passive consistency-check node. Compares the active LoRAs from the Stack against the actual prompt text and reports which trigger words are present and which are missing.

New since this documentation was last updated:

- **Polyhedron Merge Analyzer** — a passive measurement node for the Combined / Smooth Mix merge path. Shows what the Stack is about to merge and, on request, measures how faithful the merge is (chapter 14).
- **Cleanup switches — Trim & Resolve** — two per-group refinement switches for stacks with many concurrent LoRAs (section 3.7).

The companion nodes — Token Counter, Select Model Switch, WAN Bridge, Frame Inflate / Pick Frame and the Sigma nodes — are covered in chapters 9–13.

Design principle

One node = one model. For dual-noise workflows, use two Stack nodes side by side (HIGH and LOW), each receiving its own model. The nodes are fully independent.

The backend is model-agnostic: FLUX, WAN 2.1, WAN 2.2, SDXL, SD 1.5 all work identically.

2 · Installation

Copy the folder into your ComfyUI custom nodes directory:

`ComfyUI/custom_nodes/ComfyUI-PolyhedronLoRAStack/`

Then install the dependencies. For standard Python environments:

```
pip install -r requirements.txt
```

For ComfyUI Portable (Windows):

```
D:\ComfyUI\python_embeded\python.exe -m pip install -r requirements.txt
```

Dependencies: Pillow >= 9.0.0, requests >= 2.28.0

3 · Polyhedron LoRA Stack

The Stack node accepts a MODEL and optionally a CLIP input, applies all active LoRAs in group order, and outputs the patched model along with debug information and collected trigger words.

3.1 · Node header

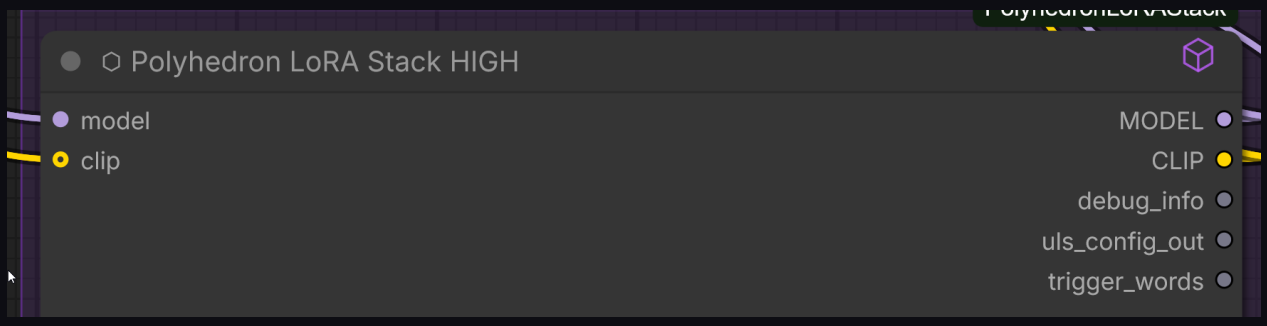

Stack node header — inputs on the left, outputs on the right.

The header contains:

- **model** (input) — the diffusion model to patch.
- **clip** (input, optional) — the text encoder. Not required for WAN/video models.
- **MODEL** (output) — the patched model, ready for the sampler.
- **CLIP** (output) — the patched text encoder.
- **debug_info** (output) — lists every applied LoRA, weight, group and mode.
- **uls_config_out** (output) — internal configuration passthrough for chaining and analysis.
- **trigger_words** (output) — all trigger words from active LoRAs, comma-separated.

3.2 · Row anatomy



A single LoRA row — all interactive elements visible.

Each row represents one LoRA. From left to right:

- ▲ ▼ — move the row up or down in the list.
- **Checkbox** — enable or disable this LoRA without removing it.
- **Thumbnail** — preview image if available. Click to open the detail overlay.
- **Name button** — displays the filename. Click to open the LoRA selector with search.
- ↵ **Insert** — inserts trigger word(s) at the cursor in the active text node.
- **Group pill** — shows the group (SUBJ, DETA, SCEN …). Left-click cycles groups. Right-click opens the apply mode panel.
- ◀ **Weight** ▶ — LoRA strength. Click arrows to step by 0.05, or click the number to type directly.
- × — remove this row.

3.3 · Adding and reordering rows

▲▼ reorder buttons and the + button to add new rows.

Click **+** at the bottom of the list to add an empty row. Use ▲ / ▼ to reorder, or drag from the far-left handle.

3.4 · Stack mode and group order

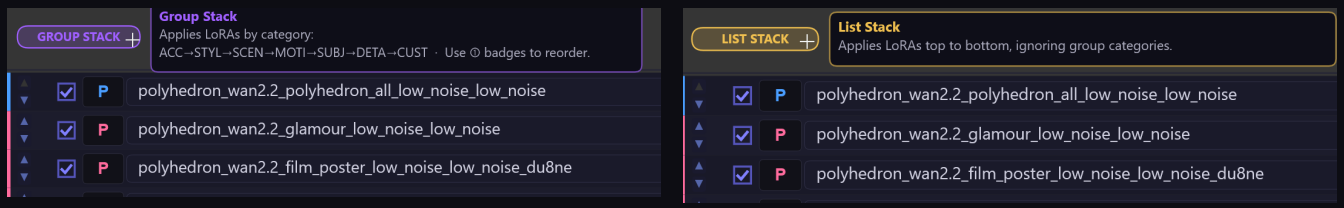

GROUP STACK — LoRAs applied by category in a fixed order. · LIST STACK — LoRAs applied top to bottom, ignoring groups.

The **GROUP STACK / LIST STACK** pill in the header controls how LoRAs are ordered when applied. Click it to toggle between the two modes.

- **GROUP STACK** (purple) — LoRAs are applied in group order: ACC → STYL → SCEN → MOTI → SUBJ → DETA → CUST. This is the default and recommended mode.
- **LIST STACK** (gold) — LoRAs are applied exactly in the order they appear in the list, top to bottom. Groups are ignored. Useful for quick testing or when list order matters more than categories.

Custom group order

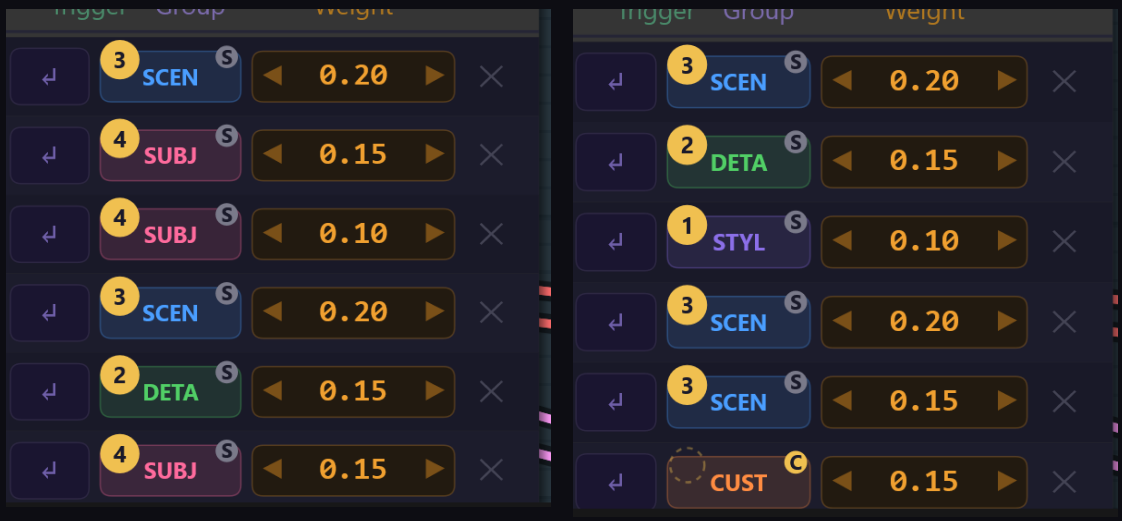

Gold badge = custom order assigned. · Dashed circle = no order set (runs after numbered groups).

In GROUP STACK mode, each group can be assigned a custom stack position using the **gold order badge** in the top-left corner of the Group pill.

- Gold filled badge with a number — this group runs at that position.

- Dashed circle — no position set, runs after all numbered groups.
- **Click the badge** to open the Stack Order input. Enter 1–8 to assign a position, 0 to clear.
- Each number can only be used once — a duplicate entry is rejected and the conflicting badge flashes red briefly.

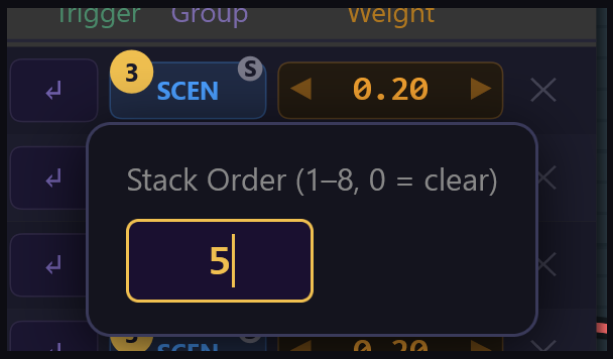

Stack Order input — integer 1–8, enter 0 to clear.

3.5 · Groups

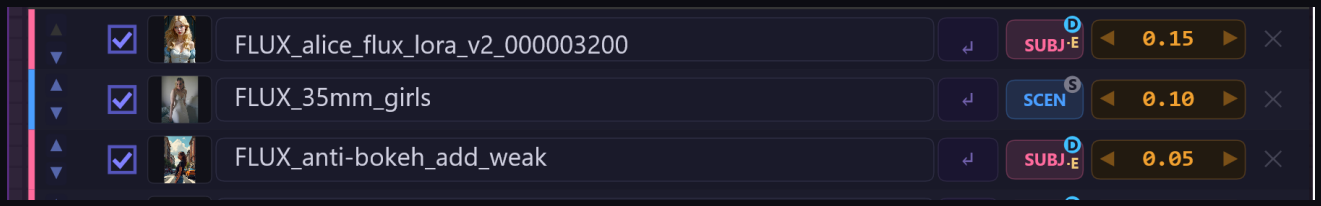

Group pills: SUBJ·E = Element Drop, SCEN·S = Sequential, DETA·C = Channel Drop.

Every LoRA belongs to a group. Groups control the *application order* and the *apply mode* for that batch. Default group order:

`ACC → STYL → SCEN → MOTI → SUBJ → DETA → CUST → (ungrouped)`

Group	Badge	Intended content	Default mode
—	—	Ungrouped / unassigned LoRAs	SEQ
acc	ACC	Acceleration / distillation LoRAs (LightX2V, FusionX, CausVid …)	SEQ
style	STYL	Film look, colour grading, artist styles	SEQ
scene	SCEN	Setting, atmosphere, vegetation, objects	SEQ
motion	MOTI	WAN motion LoRAs	SEQ
subject	SUBJ	Main subject, clothing, accessories	SEQ
detail	DETA	Skin, eyes, hands, anatomy corrections	SEQ
custom	CUST	Anything else	SEQ

Note: Group assignments persist in uls_groups.json next to your LoRAs folder — they survive workflow reloads and ComfyUI restarts.

3.6 · Apply modes

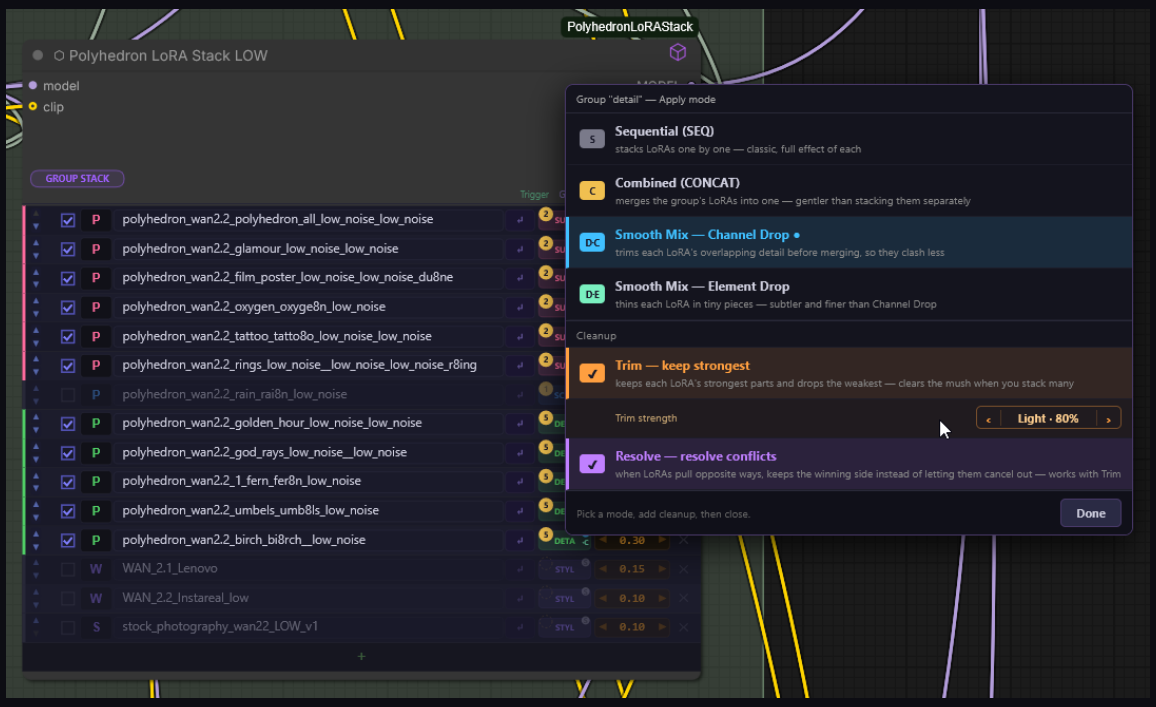

Right-click on any Group pill to open the apply-mode panel — base modes on top, Cleanup switches below.

Each group has its own apply mode. **Right-click the Group pill** to open the apply-mode panel. The mode applies to all rows in that group.

The panel **stays open** while you click, so you can pick a base mode and layer the Cleanup switches (section 3.7) in one go. Close it with **Done**, a click outside, or **Escape**.

Mode	Badge	What it does	Best for
Sequential	S (grey)	Applies each LoRA one by one — classic, full effect of each.	Default. Always safe.
Combined	C (gold)	Merges the group's LoRAs into one patch — gentler than stacking them separately.	Experimental comparison with SEQ.
Smooth Mix — Channel Drop	D·C (cyan/green)	Like Combined, but trims each LoRA's overlapping detail before merging — drops whole rank-channels, LoRA-aware.	Groups with many LoRAs targeting the same area.
Smooth Mix — Element Drop	D·E (cyan/gold)	Like Combined, but thins each LoRA in tiny pieces — drops individual tensor elements (classic DARE paper).	Alternative to Channel Drop — finer-grained.

DARE density — automatic scaling

`density = max(0.5, 1 - 0.05 x (n-1))` | 2 LoRAs: 0.95 | 5 LoRAs: 0.80 | 10 LoRAs: 0.55

The DARE seed is deterministic (SHA-1 of names + weights) — same config = same result every session.

3.7 · Cleanup switches — Trim & Resolve

Below the four base modes, the panel has a **Cleanup** section with two optional switches. They refine the **Combined / Smooth Mix** merge for groups with many concurrent LoRAs. In **Sequential** mode the section is greyed out ("Cleanup — needs Combined or Smooth Mix") and the backend ignores both switches.

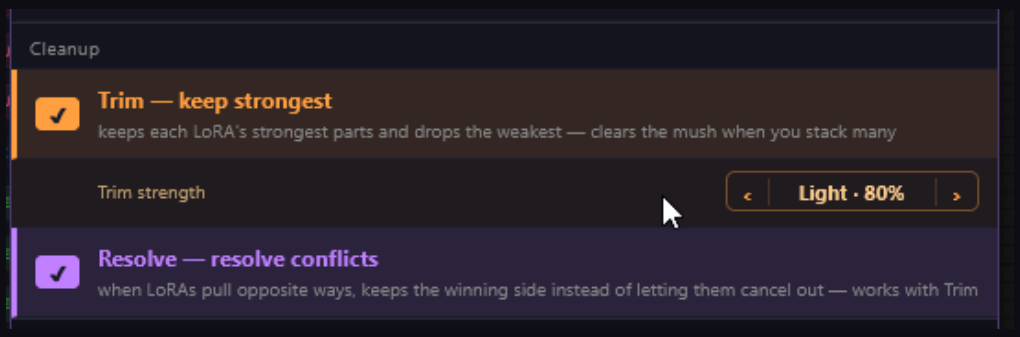

The Cleanup section — Trim with its strength stepper, and Resolve.

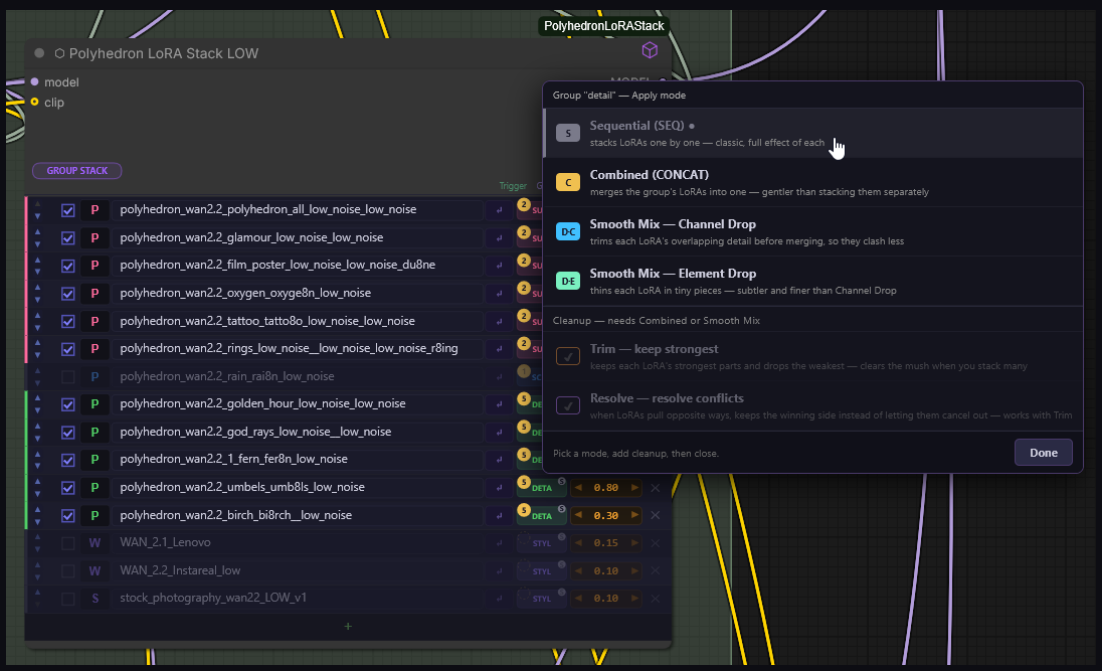

On a Sequential group the Cleanup section is greyed out — switch states are kept, but ignored.

Trim — keep strongest

Keeps each LoRA's strongest parts and drops the weakest — clears the multi-LoRA interference that builds up when many LoRAs are stacked at once. The trim is **deterministic** (no randomness): for each LoRA, the weakest rank-channels are removed by magnitude *before* the group is merged.

Trim strength — a stepper under the Trim switch (visible while Trim is on) sets how much of each LoRA is kept:

Step	Kept share	Character
Auto	group-scaled	recommended starting point
Gentle	90%	barely noticeable
Light	80%	safe everyday value
Medium	70%	noticeable cleanup
Strong	60%	aggressive
Max	50%	extreme stacks only — see warning

‹ steps toward Auto (gentler), › toward Max (stronger).

Auto scaling

The more LoRAs are active in the group, the more of the weak tail is pruned: 2 LoRAs keep ~95%, 5 keep ~88%, 10 keep ~73%, 15+ hit the floor of 60%.

⚠ Too much Trim

Max · 50% can cut away the very channels that make a concept distinctive: the subject collapses to a silhouette and the base model fills the gap with unprompted content. A high LoRA weight does **not** protect against this — the trim ranking runs inside each LoRA. Use Max only for extreme stacks (15+ LoRAs) and always check results visually. If renders look washed out with Trim on, lower the Trim strength first. The recommended working range is **70–80%** (Medium/Light); the Merge Analyzer (chapter 14) warns about this in its report.

Resolve — resolve conflicts

When LoRAs pull in opposite directions, Resolve keeps the winning side instead of letting them cancel each other out — and it works together with Trim. Under the hood it runs a sign election across the group's competing LoRAs and then re-packs the result so it stays as light as a normal LoRA patch.

Good to know

- **Persistent** — the switch states *and* the Trim strength are saved into the workflow and restored on load. They survive ComfyUI restarts and never reset to defaults on their own. (Group *assignments* persist separately in `uls_groups.json`, see section 3.5.)
- **Visible in debug_info** — each group is tagged with its full mode, e.g. `DARE [CHAN] +TRIM +RESOLVE`.
- **Console feedback** — long Combined / Smooth Mix merges print a live progress log to the console (`[PLS]` lines, plus a per-phase merge-timing summary at the end), so you can see what a long merge is doing.
- **Cancel works** — ComfyUI's red × aborts a running merge promptly instead of letting it finish in the background.

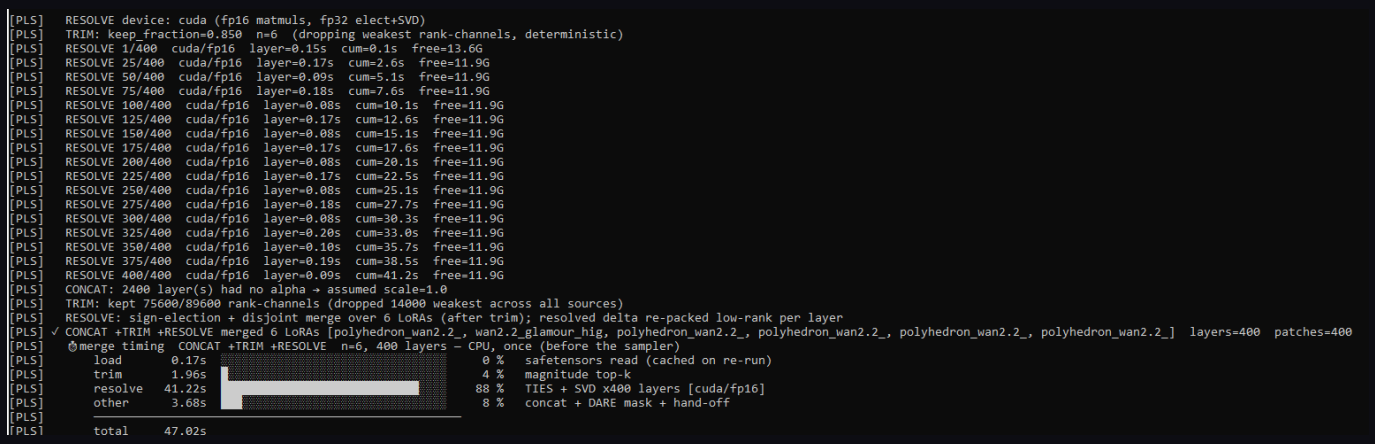

Live console output of a Combined merge with Trim and Resolve — per-layer progress, the trim/resolve summary lines, and the per-phase timing bar.

3.8 · Mode badge on the Group pill

The dot in the top-right corner of each Group pill shows the current mode:

- **S** grey — Sequential
- **C** gold — Combined / CONCAT
- **D** cyan + **·C** or **·E** — Smooth Mix active. C = Channel Drop, E = Element Drop.

Toggle the Smooth Mix variant by clicking the ·C/·E badge, or via the right-click panel. The pill shows the **base mode** only — the Cleanup switches are visible in the right-click panel and in `debug_info` (`+TRIM` / `+RESOLVE`).

3.9 · Thumbnail overlay

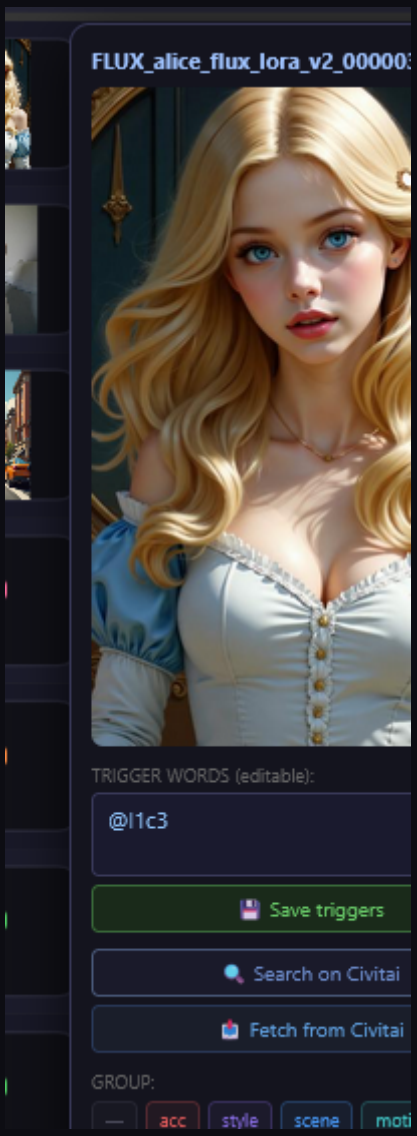

Thumbnail overlay — preview, trigger words, Civitai, group selector, Smooth Mix variant.

Click a thumbnail to open the detail overlay:

- **Preview image** — LoRA preview if available.
- **TRIGGER WORDS** — editable. Click Save triggers to store.
- **Search on Civitai / Fetch from Civitai** — Civitai integration.
- **GROUP** — reassign the LoRA to a different group.
- **DARE VARIANT** — only visible when the group uses Smooth Mix. Select CHAN or ELEM.

Note: Trigger .txt files are read-only. Edits are stored in .uls-meta.json.

3.10 · Hover preview

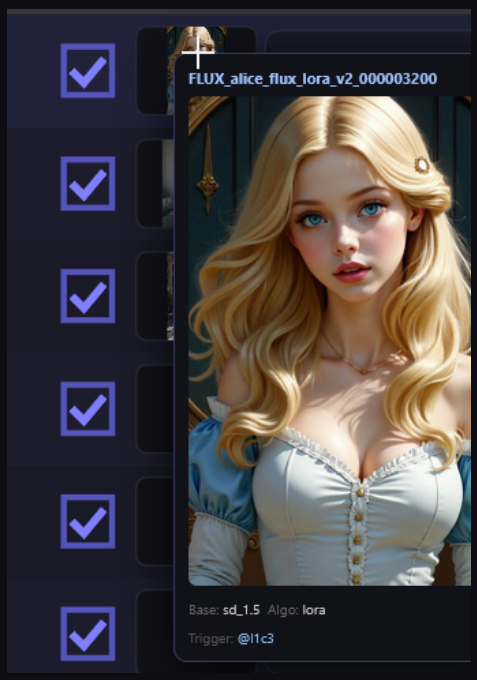

Hovering over a thumbnail shows a quick preview popup.

Hovering over a thumbnail shows a popup with preview image, base model type, and trigger words — no click needed.

3.11 · Trigger word insertion

The ↵ button inserts trigger word(s) at the cursor in the active text node:

- **Single trigger** — inserted immediately with a toast confirmation.
- **Multiple triggers** — a selection popup lists all options. Click one to insert.

Trigger selection popup. · Confirmation toast + trigger in the prompt node.

3.12 · Setting weights

Three ways to change a LoRA's weight:

- ◀ / ▶ — step by 0.05.
- **Click the number** — type any value, press Enter. Range: -10.0 to 10.0.

Direct weight input field.

3.13 · Per-row CLIP strength

By default a row's CLIP (text-encoder) strength follows its model weight — exactly as in every previous version. Each row can decouple the two and carry a separate CLIP strength, on both the LoRA Stack and the LoRA Engine.

Shift-click on a weight opens the blue CLIP Strength input. The first row is decoupled (0.30 / c 0.35).

- **Shift-click** the weight value and enter a separate CLIP strength.
- **Two-line cell** — decoupled rows show the amber model weight on top and the blue CLIP strength (c 0.35) below.
- **Shift + ◀ ▶** steps the CLIP strength; a plain click / ◀ ▶ still edits the model weight.
- **Re-link** — entering the model weight again returns the row to the classic single value.

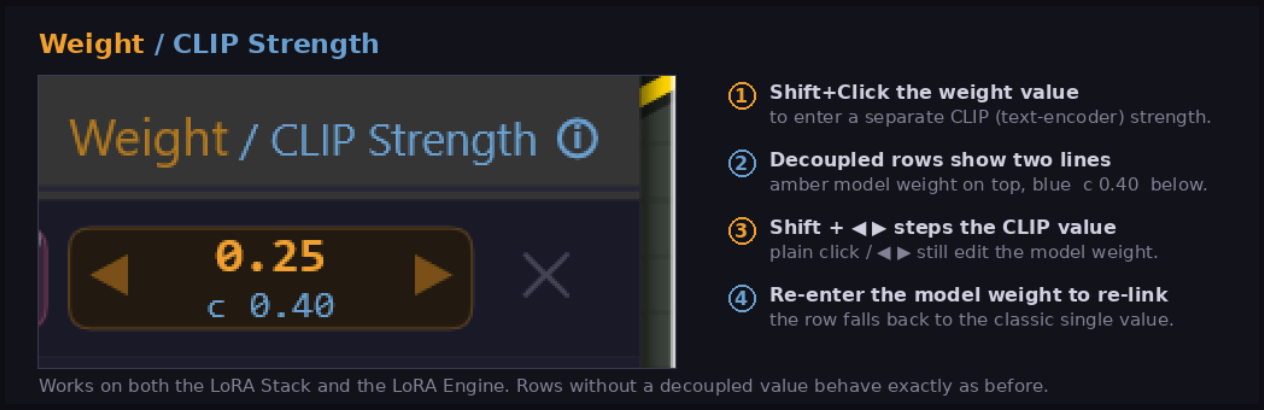

The interaction at a glance — header, decoupled cell, stepping and re-linking.

Behaviour and compatibility

Hover the Weight / CLIP Strength column header for an in-node reminder of these shortcuts. In Sequential mode the CLIP strength is passed straight to the loader; in Combined / Smooth Mix the text-encoder layers are scaled with the CLIP strength inside the same one-pass merge. Smooth Mix seeds stay derived from the model weights only, so existing results are bit-identical until a row is actually decoupled. The feature is only relevant for models whose LoRAs carry text-encoder keys (SDXL, SD 1.5, FLUX, ...) — WAN LoRAs have none, so WAN workflows are unaffected.

4 · Polyhedron LoRA Engine

The Engine node is designed for **acceleration LoRAs** — LoRAs that modify *how* the model generates (inference trajectory, step reduction) rather than *what* it depicts. Examples: LightX2V, FusionX, CausVid, WAN 2.1 Lightning.

It uses a flat list with a single global apply mode. Place it *before* the Stack node — connect MODEL and CLIP outputs of the Engine into the Stack inputs.

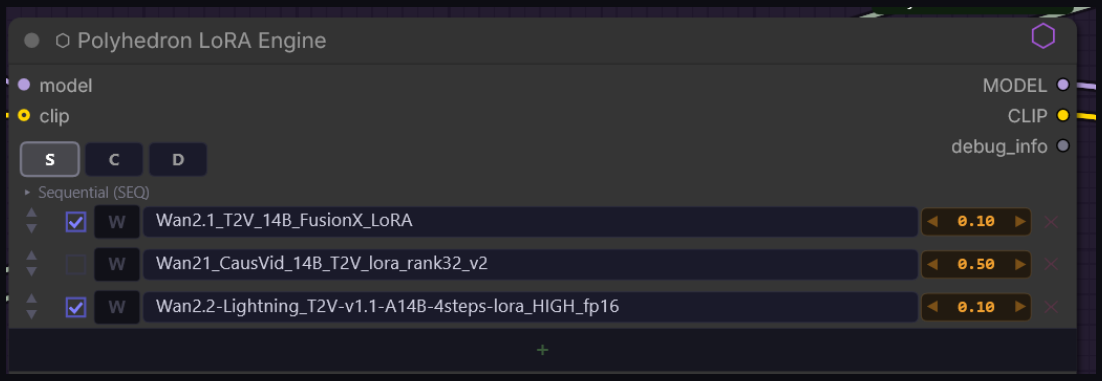

Engine node — S mode active, three acceleration LoRAs loaded.

4.1 · Mode buttons and DARE variant

Buttons **S**, **C**, **D** select the apply mode for all Engine LoRAs. When **D** is active, a **CHAN** or **ELEM** pill appears to its right. Click to toggle. Hover for a tooltip.

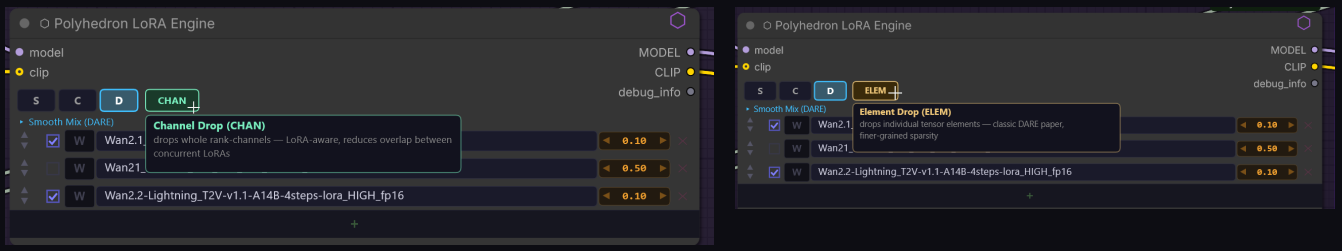

CHAN — Channel Drop tooltip. · ELEM — Element Drop tooltip.

The Cleanup switches (section 3.7) are currently **Stack-only**; the Engine offers the plain S / C / D modes.

> **Engine vs Stack — when to use Smooth Mix**
>
> For acceleration LoRAs (typically 2-3), SEQ is the recommended default.
>
> Smooth Mix is most useful in the Stack when a group has 5+ LoRAs targeting the same model areas.

5 · Polyhedron LoRA Inspector

The Inspector node is a **passive consistency-check tool**. It compares the active LoRAs from the Stack node against the actual text in your prompt and reports which trigger words are present and which are missing — without modifying anything.

This is useful when working with many LoRAs at small weights: trigger words are easy to forget, and a missing trigger silently weakens the LoRA's effect. The Inspector makes this visible at a glance.

5.1 · Inputs and output

The Inspector has two inputs and one output:

- **uls_config_out** (input, green link) — connect from the Stack's *uls_config_out* output. Carries the list of active LoRAs with their weights, groups, and trigger words.
- **prompt** (input, STRING) — connect the same string that goes into your CLIPTextEncode / prompt encoder.
- **inspector_report** (output, STRING) — formatted report. Connect to a Show Text node to display it.

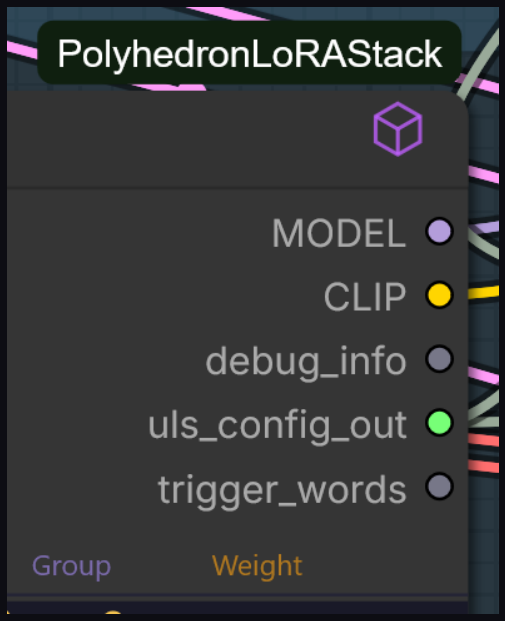

Stack node — green uls_config_out output pin connects to the Inspector.

5.2 · How matching works

The Inspector checks each active LoRA's trigger words against the prompt:

- **Weighted syntax** — (trigger:1.2), (trigger:0.8) etc. is recognised and shown verbatim in the report.
- **Plain keywords** — bare trigger words are matched with word boundaries, so "ring" inside "stinging" is not a false positive.
- **No trigger defined** — LoRAs without trigger words are listed separately and don't count as missing.

Trigger word resolution priority

1. .uls-meta.json (user-edited triggers from the thumbnail overlay)
2. .txt file next to the .safetensors (read-only)
3. Embedded safetensors header metadata
4. Filename fallback

The Inspector uses the same priority as the Stack — what you see in the overlay is what the Inspector matches against.

5.3 · Report format

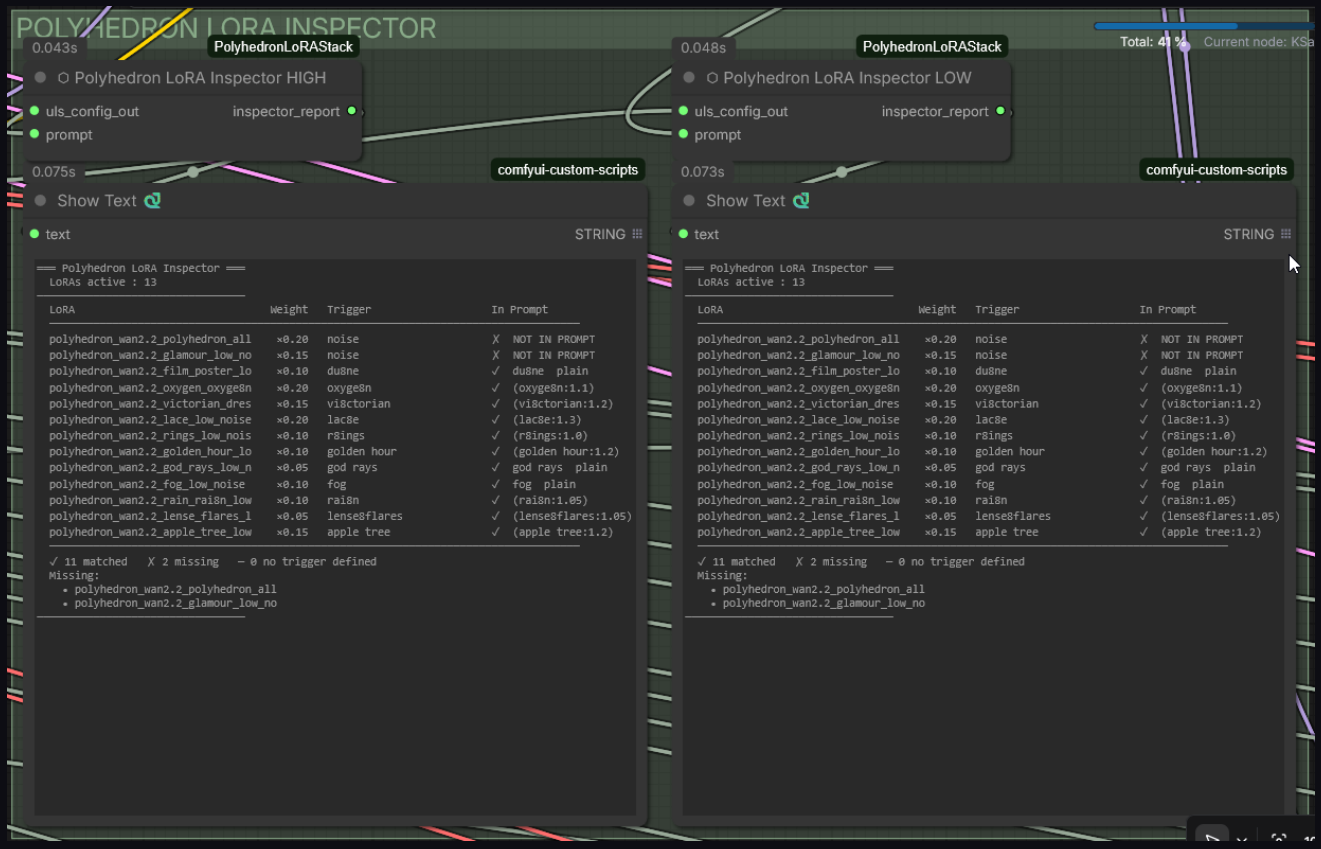

Two Inspector nodes for HIGH and LOW Stacks — same prompt input, different uls_config_out links.

The report is a fixed-width text table:

- **LoRA** — short filename
- **Weight** — current weight in the Stack
- **Trigger** — the trigger word(s) defined for this LoRA
- **In Prompt** — ✓ if found (with the actual matched syntax shown), X if missing, or 'plain' if found as a plain keyword without weight syntax

A summary line at the bottom shows totals: matched, missing, no trigger defined. Missing LoRAs are listed by name so they're easy to fix.

5.4 · Dual-noise pattern

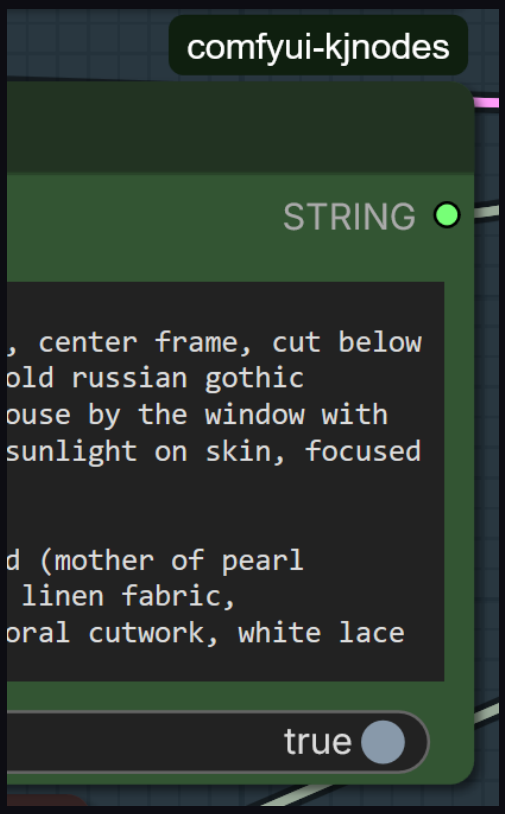

The prompt String node — feeds both Inspector nodes and the CLIPTextEncode.

For dual-noise workflows (WAN 2.2): use **two Inspector nodes**, one connected to the HIGH Stack's *uls_config_out* and one to the LOW Stack. Both receive the same prompt. This way you can verify that all triggers for both noise paths are present in the prompt.

Inspector is passive

The Inspector never modifies your prompt or your LoRA configuration. It only reads and reports. Disconnect it any time without consequences.

The Show Text node connected to inspector_report only runs when needed — the Inspector itself doesn't trigger workflow execution.

6 · Connecting the outputs

Stack node outputs and how to connect them:

- **MODEL** → sampler (KSampler, KSamplerAdvanced, etc.)
- **CLIP** → CLIPTextEncode nodes
- **debug_info** → any text display node (optional but useful during setup)
- **uls_config_out** → Polyhedron LoRA Inspector (chapter 5) and/or Merge Analyzer (chapter 14); also used when chaining Stack nodes. Otherwise leave unconnected.
- **trigger_words** → JoinStrings or directly into your positive prompt node

Trigger words output

The trigger_words output collects trigger words from all active LoRAs automatically. Connect it to JoinStrings together with your manual prompt. No manual trigger word management needed as LoRAs are added or removed.

7 · Tips and recommended settings

7.1 · Weight strategy

The Polyhedron workflow uses many LoRAs at small weights (0.05–0.20) rather than few LoRAs at full strength:

- Averages across multiple training domains — reduces LoRA burn
- Allows fine-grained control over each element's contribution
- Makes Smooth Mix subtle at low weights — acts as insurance rather than a strong effect

7.2 · Dual-noise workflow (WAN 2.2)

Use two Stack nodes side by side — one for HIGH noise, one for LOW noise. Each receives its own separate WAN 2.2 model. Configure both identically.

7.3 · Group mode recommendations

Group	LoRAs	Recommended mode	Reason
subject (SUBJ)	3–5	SEQ	Full individual effect needed
detail (DETA)	5–8	Smooth Mix · CHAN + Trim + Resolve	Many overlapping LoRAs — classic conflict case
scene (SCEN)	3–5	SEQ	Small enough that conflicts are minimal
acc (ACC)	2–3	SEQ	Acceleration LoRAs rarely conflict

For Trim, start with **Auto** and stay in the **70–80%** corridor when overriding — see the warning in section 3.7 before going lower.

8 · Preview images and trigger words

Place files alongside your .safetensors files:

- **Preview image:** same base name, .jpg extension
- **Trigger words:** same base name, .txt extension. Read-only — never modified.
- Edits made in the overlay are stored in .uls-meta.json (auto-created). These take priority over the .txt file if both exist.
- Trigger words also read from the safetensors header as fallback.

Resolution priority (highest first): `.uls-meta.json → .txt → safetensors header → filename`

Note: Civitai preview images and trigger words can be fetched automatically via "Fetch from Civitai" in the thumbnail overlay.

Note: Civitai preview selection is SFW-strict — only gallery images rated None/Soft are used as previews. If a LoRA's Civitai gallery contains exclusively Mature/X-rated images, no preview is stored.

9 · Polyhedron Token Counter

The Token Counter is a companion node for the Stack. It reads both the positive and negative prompt strings and counts how many tokens each consumes — measured against the limit of the active text encoder. When working with large LoRA collections, trigger words from 15–20 active LoRAs can silently push the prompt toward the encoder limit, degrading output quality without any warning in ComfyUI itself.

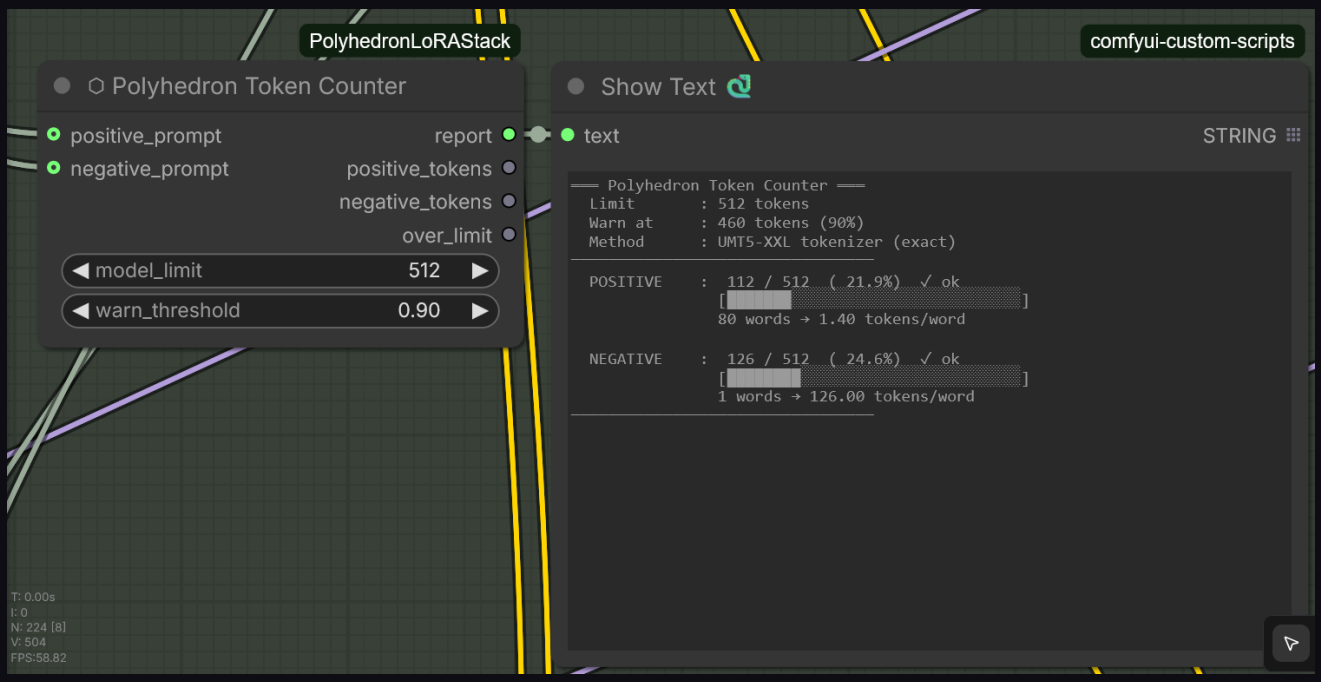

Token Counter node connected to a Show Text node. The report shows POSITIVE and NEGATIVE prompts separately with usage bars, percentages, and tokens-per-word ratios.

9.1 · Inputs, outputs and widgets

Name	Type	Description
positive_prompt	STRING (input)	Connect from your positive prompt node or from trigger_words.
negative_prompt	STRING (input)	Connect from your negative prompt node.
report	STRING (output)	Full formatted report — connect to a Show Text node.
positive_tokens	INT (output)	Raw token count for the positive prompt.
negative_tokens	INT (output)	Raw token count for the negative prompt.
over_limit	BOOLEAN (output)	True when either prompt exceeds warn_threshold × model_limit.
model_limit	INT (widget)	Token limit of the active encoder. Default 512 (UMT5 / WAN).
warn_threshold	FLOAT (widget)	Fraction of model_limit at which to warn. Default 0.90 = warn at 90%.

9.2 · Report output

The report shows POSITIVE and NEGATIVE separately, each with a usage bar, percentage, word count, and a tokens-per-word ratio. A checkmark (ok) appears when under the warn threshold; an exclamation mark appears when the threshold is exceeded.

Typical placement

Connect positive_prompt from the same string node that feeds your CLIPTextEncode. Connect negative_prompt from the negative string. The node runs passively — it never modifies data, only counts.

9.3 · Token limits by model

Different text encoders have different token limits. The table below covers all models commonly used in ComfyUI workflows. The WAN row (highlighted) is the primary target of this plugin.

Model	Text Encoder(s)	Hard Limit	Practical	Notes
SD 1.5	CLIP-L	77	75	One chunk = 75 usable tokens. ComfyUI can chain chunks.
SDXL	CLIP-L + CLIP-G	77 each	75 each	Two encoders in parallel. Long-prompt extensions available.
SD 3 / 3.5	CLIP-L + CLIP-G + T5-XXL	77/77/512	75/75/512	Triple encoder. T5 carries most semantic load.
FLUX.1 dev / schnell	CLIP-L + T5-XXL	77 / 512	75 / 512	CLIP-L: style anchor. T5-XXL: full prompt detail.
FLUX.1 Kontext	CLIP-L + T5-XXL	77 / 512	75 / 512	Same encoders as FLUX.1. Image tokens add to budget.
FLUX.2 / Lumina	CLIP-L + Mistral-3 24B	77 / ~4096	75 / ~2000	Mistral-3 replaces T5. Quality gain plateaus early.
Qwen-Image	Qwen2.5-VL 7B	No hard limit	~500	LLM-based encoder. Practically limited by VRAM and quality.
WAN 2.1 / 2.2	**UMT5-XXL**	**512**	**~256–300**	**Hard limit 512. Quality degrades above ~320–350: slower motion, grid artefacts.**
HunyuanVideo / 1.5	LLaMA-3 + CLIP-L	1000 / 77	~400 / 75	LLaMA-3 is primary (1000 limit, ~400 recommended). CLIP-L for visual anchor.
CogVideoX	T5-XXL	226	200	T5 capped at 226 in official implementation.
Mochi / LTX-Video	T5-XXL	256	200	T5-XXL at 256 tokens.

WAN / UMT5 practical limit

Although UMT5 supports up to 512 tokens, quality degrades noticeably above approximately 320–350 tokens: motion slows down and a grid pattern artefact can appear in the output video. The default warn_threshold of 0.90 (= 460 tokens) is conservative — consider lowering it to 0.60–0.65 (~300–330 tokens) for WAN workflows.

10 · Polyhedron Select Model Switch

The Select Model Switch node provides six model slots and outputs the filename of the active model as a string. It is designed to sit next to your model loader nodes, allowing fast switching between model variants without rewiring the graph.

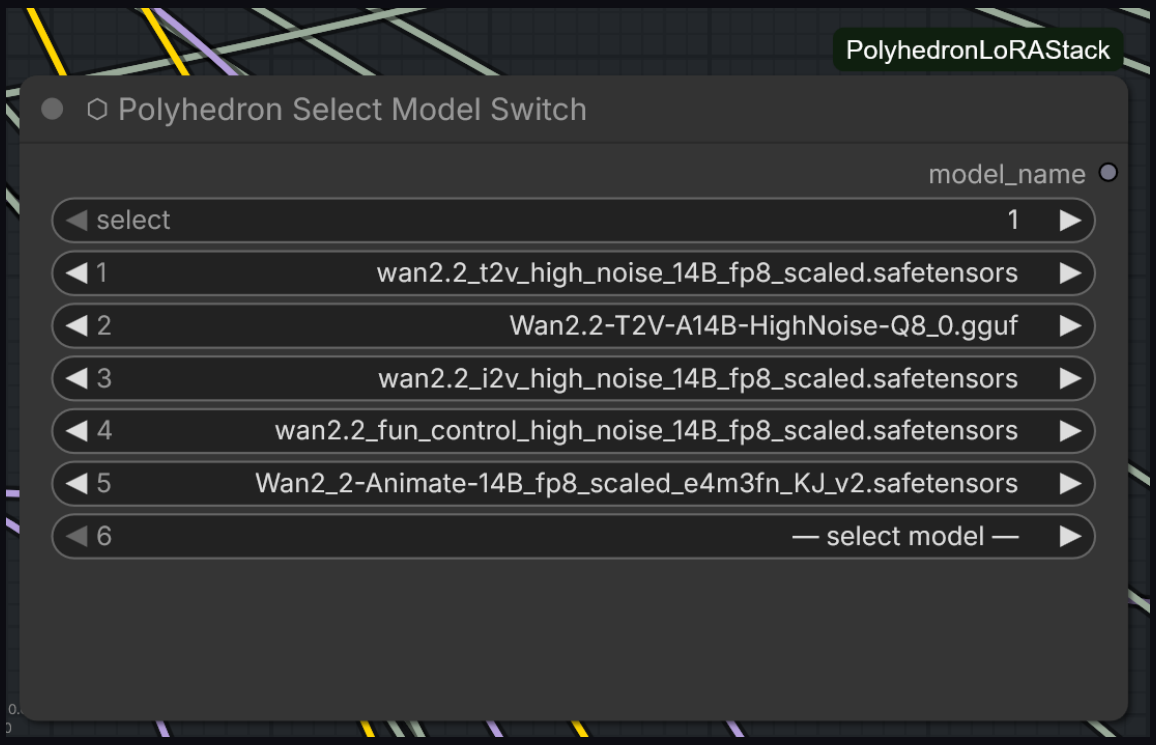

The Polyhedron Select Model Switch node with all six slots populated. Slots 1 and 2 are wire inputs (green dots on the left); slots 3–6 are dropdown widgets built directly into the node.

Slots 1 and 2 are **wire inputs** (green dots) — connect a MODEL output from any loader node. Slots 3–6 are **dropdown widgets** built directly into the node — click the arrow to open a searchable list of all models in your diffusion_models folder.

10.1 · Inputs, outputs and widgets

Name	Type	Description
1, 2	MODEL (input)	Wire inputs. Connect any loader node output directly.
3, 4, 5, 6	COMBO (widget)	Dropdown selectors. Choose a model filename from the list.
select	INT (widget)	Active slot index (1–6). Only this slot's model is used.
model_name	STRING (output)	Filename of the active model. Connect to a model loader's path input.

10.2 · Wire-input usage

Slots 1 and 2 accept any MODEL connection. A typical use is to wire two model loader nodes — one HIGH and one LOW — directly into the Switch node, with the slot dropdowns 3–6 holding additional variants for quick comparison without rewiring.

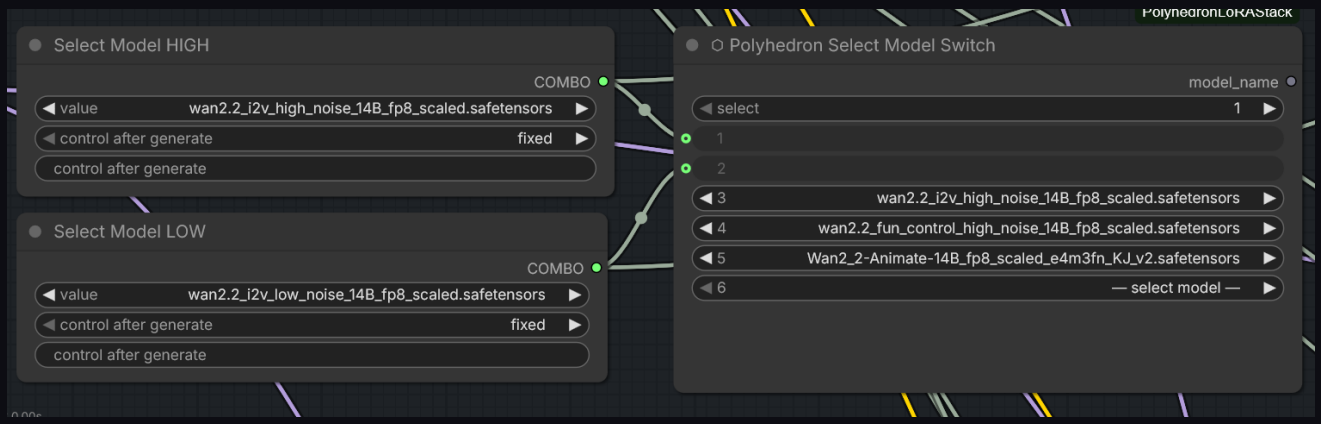

Two Select Model nodes (left) wired into a Polyhedron Select Model Switch (right). The Switch holds additional variants in slots 3–5; slot 6 is left as the placeholder fallback.

10.3 · Searchable dropdown

Each dropdown slot (3–6) opens a filterable list of all models in the diffusion_models folder. Start typing in the filter field at the top to narrow the list — particularly useful when you have dozens of model variants installed.

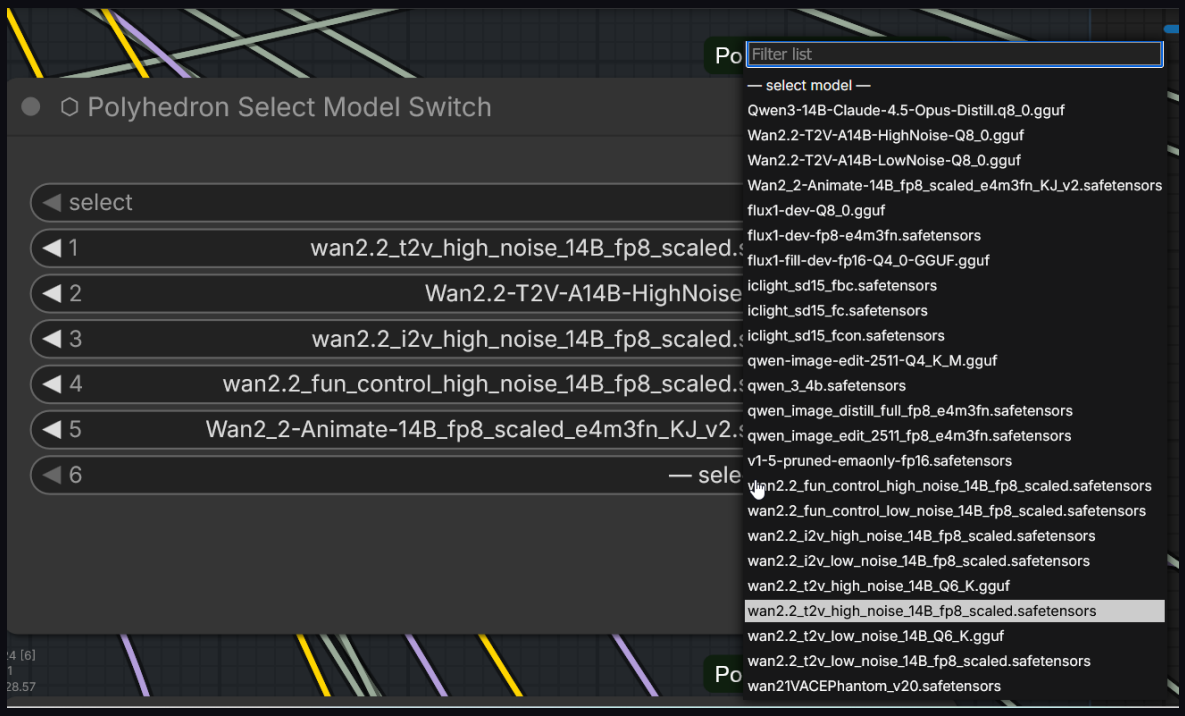

The dropdown selector with a filter field at the top. All models in the diffusion_models folder are listed and can be searched.

10.4 · Slot 6 placeholder

Slot 6 defaults to **— select model —**. Leave it as-is to use it as an intentionally empty fallback, or assign a model to use all six slots.

10.5 · Recommended use in dual-noise workflows

In a WAN 2.2 dual-noise setup, place one Switch node on the HIGH path and one on the LOW path. Wire or select all your HIGH model variants in the first Switch and all LOW variants in the second. Change the select index on both to swap the full model pair in a single edit.

11 · Polyhedron WAN Bridge

ComfyUI uses two distinct model types for WAN workflows: **WANVIDEOMODEL** (the native type used by WanVideoWrapper nodes) and **MODEL** (the standard ComfyUI type used by KSampler, LoRA loaders, and most other nodes). The two Bridge nodes convert between these types so that both ecosystems can be used in the same pipeline.

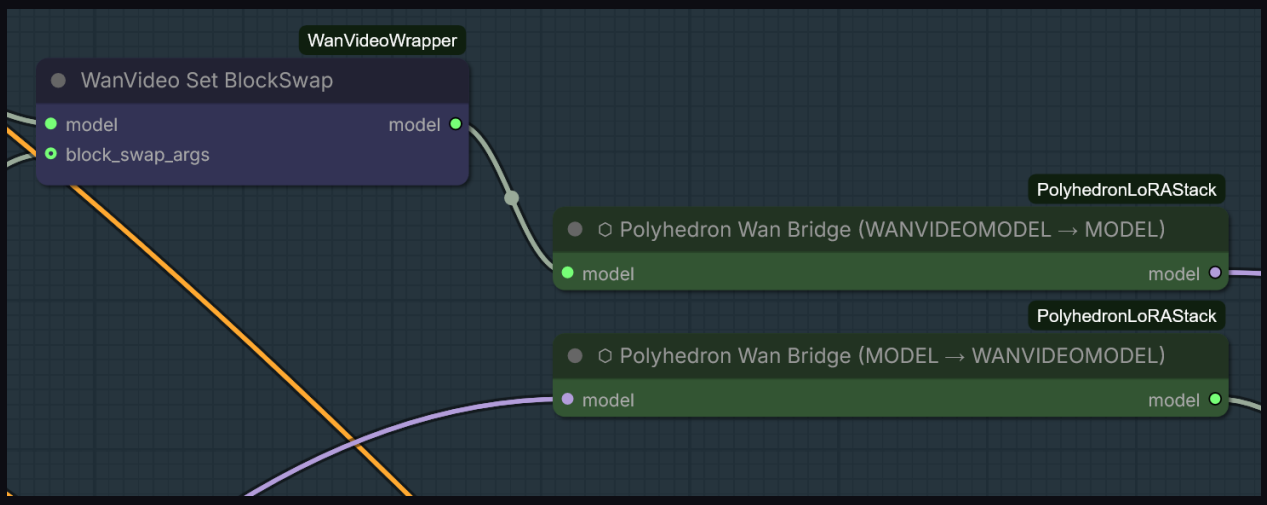

Both Bridge variants side by side. Top: WANVIDEOMODEL → MODEL (green input dot, lilac output dot). Bottom: MODEL → WANVIDEOMODEL (lilac input dot, green output dot). The colour of the dots indicates the type at that connection point.

Polyhedron Wan Bridge (WANVIDEOMODEL → MODEL)

Takes a WANVIDEOMODEL input and outputs a standard MODEL. Use this when you want to pass a WanVideoWrapper-loaded model into nodes that expect the standard MODEL type — for example the Polyhedron LoRA Stack or a KSampler.

Polyhedron Wan Bridge (MODEL → WANVIDEOMODEL)

Takes a standard MODEL input and outputs a WANVIDEOMODEL. Use this to pass a model that has been processed by standard ComfyUI nodes (e.g. after LoRA patching) back into WanVideoWrapper nodes.

11.1 · Inputs and outputs (both nodes)

Name	Type	Description
model	WANVIDEOMODEL or MODEL (input)	The model to convert. Type depends on which Bridge variant is used.
model	MODEL or WANVIDEOMODEL (output)	The converted model. Passed downstream to the next node.

11.2 · Typical pipeline position

In the standard dual-noise workflow:

- WanVideo model loader → **Bridge (WANVIDEOMODEL → MODEL)** → LoRA Stack → WanMoeKSampler
- LoRA Stack (MODEL output) → **Bridge (MODEL → WANVIDEOMODEL)** → WanVideoWrapper sampler

Stability note

Both Bridge nodes are pure type-cast operations — they do not modify model weights or patches. They have been stable since v232 and are not modified during active development.

12 · Polyhedron Wan Frame Inflate (T2I LoRA fix)

WAN T2I + LoRA + fp8 = LoRA bug (kijai #1827)

When generating single frames (num_frames=1) with active LoRAs on fp8_scaled models, LoRA effects often do not apply — the output looks like the base model without any LoRA influence.

Available fixes:

- Load model as GGUF Q6_K instead of fp8_scaled **(recommended)**
- Use the Polyhedron Wan Frame Inflate node (below)
- Switch to native KSampler + UNETLoader

The Frame Inflate node works by temporarily inflating the **image_embeds** tensor to a multi-frame sequence before sampling, which forces the fp8 model to activate its LoRA-aware code path. After sampling, the extra frames are discarded.

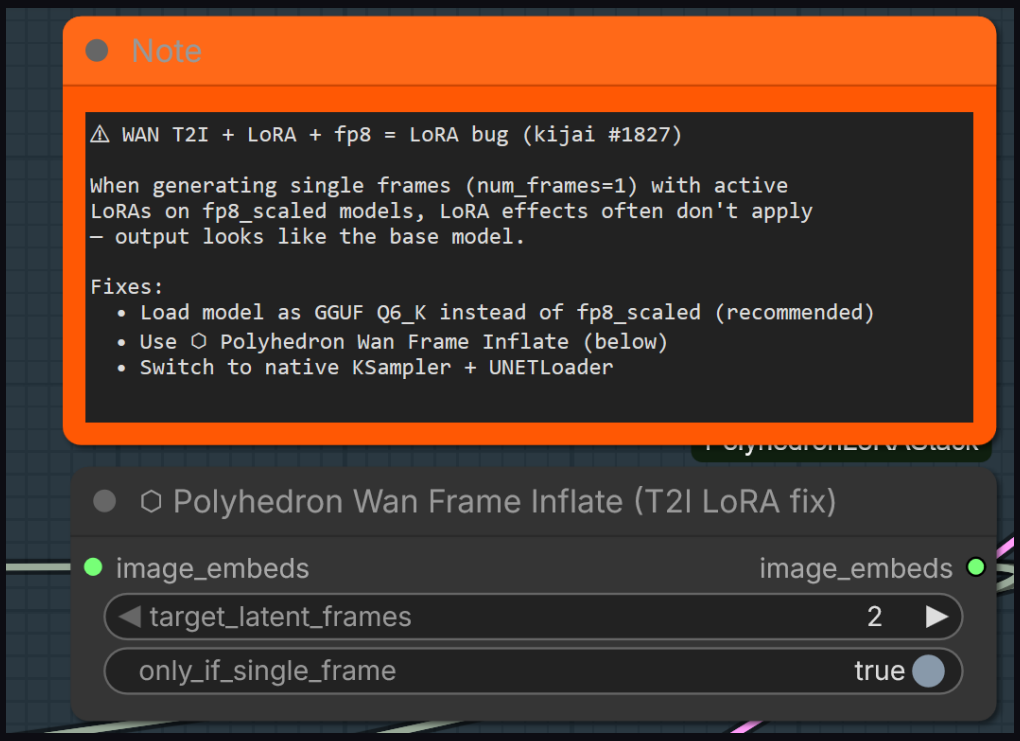

The Frame Inflate node together with the in-workflow note that documents the underlying bug and the three available workarounds.

12.1 · Inputs, outputs and widgets

Name	Type	Description
image_embeds	IMAGE_EMBEDS (input)	Connect from the image embedding node upstream of the sampler.
target_latent_frames	INT (widget)	Number of frames to inflate to. Default: 2.
only_if_single_frame	BOOLEAN (widget)	When true, only inflates if the input is a single frame. Default: true.
image_embeds	IMAGE_EMBEDS (output)	Inflated tensor, ready for the sampler.

12.2 · When to use

- You are generating single still frames (T2I mode) with WAN.
- You are using fp8_scaled model weights.
- LoRA effects are visibly absent from the output.

If you have already switched to GGUF Q6_K weights, this node is not needed. It can remain in the pipeline with only_if_single_frame=true without affecting multi-frame video generation.

12.3 · Polyhedron Pick Frame

A small companion to Frame Inflate: it picks a **single frame** out of a decoded image batch — typically the batch that Frame Inflate produced for a T2I run.

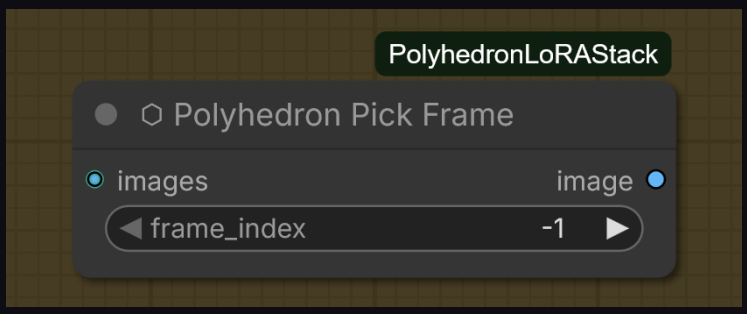

The Pick Frame node — frame_index −1 selects the middle frame.

Name	Type	Description
images	IMAGE (input)	The decoded image batch (e.g. from VAE Decode).
frame_index	INT (widget)	Which frame to pick (0-based). Default: **−1 = middle frame**.
image	IMAGE (output)	The selected single frame.

Why the middle frame? In inflated T2I runs the sampler converges most cleanly on the central frame — the first frame can carry anchor artifacts and the last can be slightly blurred by motion continuity. Out-of-range indexes are clamped; an empty batch passes through unchanged with a console warning.

Typical wiring: `Frame Inflate → sampler → VAE Decode → Pick Frame → Save Image`

13 · Sigma Nodes

13.1 · What are sigmas? A plain-language explanation

Diffusion models generate images by starting from pure random noise and gradually removing noise step by step until a clean image emerges. **Sigmas** are simply the noise levels at each step — they tell the model how much noise is still in the image at any given point.

Think of it like developing a photograph in a darkroom: you start in complete darkness (high sigma = lots of noise) and slowly bring up the lights (low sigma = little noise) until the image is fully visible. The schedule is the plan for how fast you bring up the lights.

13.2 · The scheduler

The scheduler decides the **shape** of the sigma curve — how quickly the noise level drops across the steps. Different schedulers produce different curves, which leads to different visual results even with the same model and prompt:

karras

The most widely used schedule. Spends more steps in the mid-noise range, which tends to produce well-structured images with good detail. A safe default for most workflows.

exponential

Drops noise faster in the early steps, slower in the late steps. Can produce sharper results but is more sensitive to CFG and step count.

simple / linear

Equal noise reduction per step. Fast and predictable, but often less detailed than karras. Used in some Lightning/distilled models.

bong_tangent / res_multistep and others

Community schedulers with custom curve shapes. bong_tangent front-loads the high-noise steps; res_multistep uses residual logic for smoother transitions. Results vary by model — worth experimenting with.

13.3 · The sampler

If the scheduler decides what noise levels to use at each step, the **sampler** decides how to move from one noise level to the next. It is the mathematical solver that performs the actual denoising calculation.

A practical analogy: the scheduler is the map (where you go), the sampler is the vehicle (how you get there).

euler

The simplest solver. Fast, consistent, slightly soft at low step counts. Good general-purpose default.

euler_a (ancestral)

Adds a small amount of random noise at each step, producing more varied and sometimes more creative results. Not fully deterministic — the same seed gives slightly different results each run.

dpm++ / dpm++_2m

Higher-order solvers that take larger, smarter steps. Generally produces sharper results than euler at the same step count. dpm++_2m uses two-step momentum — good balance of speed and quality.

uni_pc

Unified Predictor-Corrector. Fast convergence, good for low step counts. The default in WanMoeKSampler workflows.

lcm / ddim

Designed for distilled / Lightning models. lcm is optimised for 4–8 step generation. ddim is deterministic and good for inpainting workflows.

Scheduler + Sampler together

The two settings are independent but interact. A karras schedule with dpm++_2m is a classic high-quality pairing. A simple schedule with lcm is the standard Lightning setup. For WAN 2.2 with WanMoeKSampler the recommended defaults are simple + uni_pc for Lightning LoRAs, or karras + dpm++ for full-step generation.

13.4 · Rho (ρ) — the shape parameter

The karras schedule has one additional parameter: **rho**. It controls how curved the sigma schedule is.

- **rho = 1.0** — linear. Equal noise reduction per step.
- **rho = 3.0–5.0** — moderate curve. More steps in the mid-noise range.
- **rho = 7.0** — default. Strong curve, front-loads structure formation.
- **rho > 10.0** — very steep. Most steps are spent at low noise (detail), structure forms quickly.

Higher rho = more detail steps, but less time for large-scale structure. Lower rho = more balanced. The default of 7.0 works well for most cases.

13.5 · Polyhedron Sigma Curve

A standalone sigma schedule generator. It produces a single sigma sequence using a configurable schedule and rho value, replacing the standard BasicScheduler node. Use this in single-model workflows where you want precise control over the schedule shape.

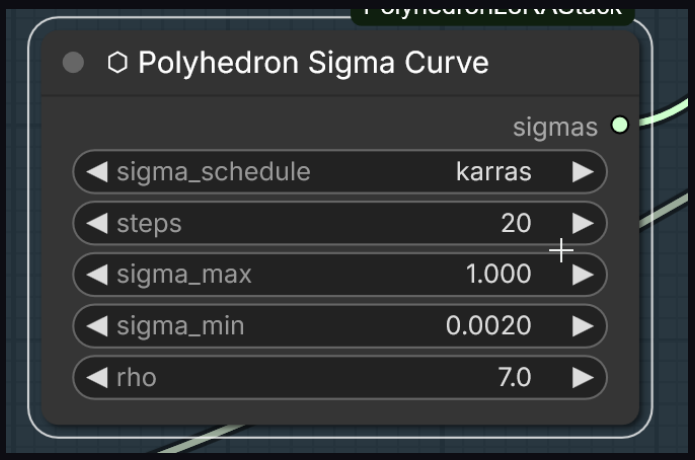

The Polyhedron Sigma Curve node with default values: karras schedule, 20 steps, sigma_max 1.000, sigma_min 0.0020, rho 7.0.

Name	Type	Description
sigma_schedule	COMBO (widget)	Schedule type: karras, exponential, simple, and others.
steps	INT (widget)	Total number of denoising steps. Default: 20.
sigma_max	FLOAT (widget)	Starting noise level. Default: 1.000 (full noise).
sigma_min	FLOAT (widget)	Ending noise level. Default: 0.0020 (near-clean).
rho	FLOAT (widget)	Curve shape. Default: 7.0. See section 13.4.
sigmas	SIGMAS (output)	The computed sigma sequence, ready for the sampler.

13.6 · Polyhedron Dual Sigma Curve

An extended sigma generator for WAN 2.2 dual-noise workflows. It produces **two separate sigma sequences** — one for the HIGH noise model and one for the LOW noise model — split at a configurable step. Each half uses its own schedule and rho value, giving independent control over the structure-forming phase and the detail-refinement phase.

Name	Type	Description
schedule_high	COMBO (widget)	Schedule for the HIGH noise segment (e.g. karras).
schedule_low	COMBO (widget)	Schedule for the LOW noise segment (e.g. bong_tangent).
total_steps	INT (widget)	Total steps across both segments combined.
split_step	INT (widget)	Step at which HIGH ends and LOW begins. Should match WanMoeKSampler boundary.
sigma_max	FLOAT (widget)	Starting noise level. Default: 1.000.
sigma_min	FLOAT (widget)	Ending noise level. Default: 0.0020.
rho_high	FLOAT (widget)	Curve shape for HIGH segment. Default: 7.0.
rho_low	FLOAT (widget)	Curve shape for LOW segment. Default: 7.0.
sigmas_high	SIGMAS (output)	Sigma sequence for the HIGH noise model.
sigmas_low	SIGMAS (output)	Sigma sequence for the LOW noise model.

13.7 · Connecting to WanVideo Scheduler nodes

In a WAN 2.2 dual-noise pipeline with WanVideoWrapper, the Dual Sigma Curve outputs connect to separate **WanVideo Scheduler HIGH** and **WanVideo Scheduler LOW** nodes. Each Scheduler node displays its sigma curve as a graph with the step values annotated — the red vertical line marks the split point.

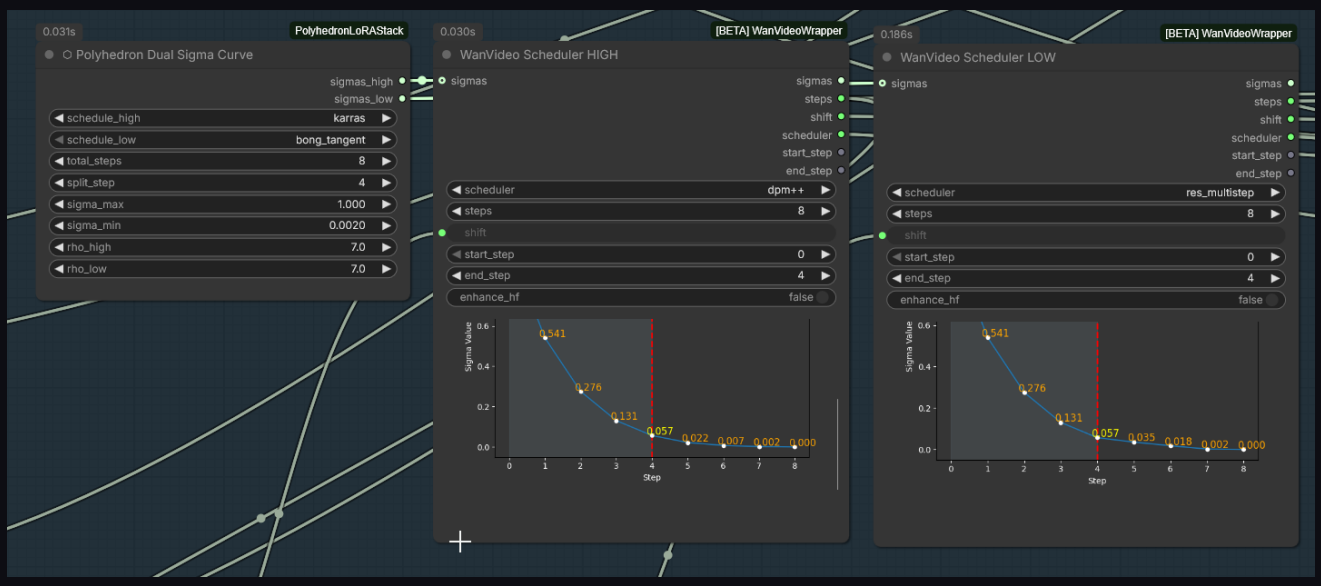

Dual Sigma Curve (left) feeding two WanVideo Scheduler nodes — HIGH (centre) and LOW (right). Each Scheduler renders its segment as an annotated sigma graph; the red vertical line marks the split step.

Known issue — LOW sigma chain

In the current release, the LOW sigma segment does not always produce visible refinement under certain scheduler combinations (e.g. res_multistep on the LOW path). This is an upstream compatibility issue under investigation. The node is safe to use — it will not corrupt output — but its effect on the LOW path may be neutral until a fix is published.

14 · Polyhedron Merge Analyzer

The Merge Analyzer is a **passive measurement node** for the Stack's Combined / Smooth Mix / Resolve merge path. It reads the Stack's `uls_config_out`, never patches the model, and answers two questions: *what* is the Stack about to merge, and *how faithful* is the Resolve re-pack for the groups that use it.

Use **one Analyzer per Stack** — in a dual-noise workflow that means one for HIGH and one for LOW.

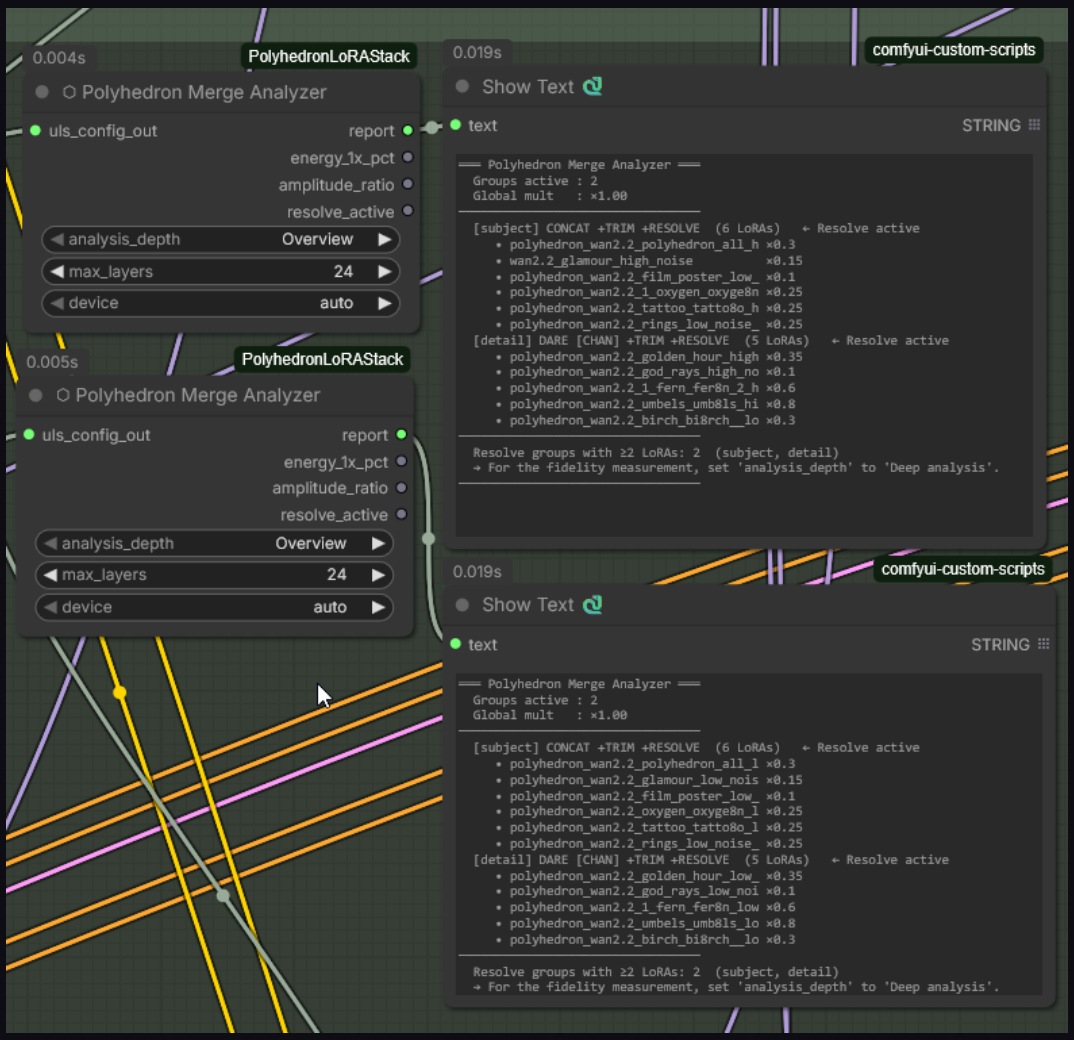

One Merge Analyzer per Stack (HIGH and LOW), each in Overview mode — Stack's uls_config_out in, report into a Show Text node.

14.1 · Inputs, outputs and widgets

Name	Type	Description
uls_config_out	STRING (input)	Connect from the Stack's uls_config_out output.
analysis_depth	COMBO (widget)	**Overview** = instant (selection/modes only). **Deep analysis** = loads the LoRAs and measures (slower).
max_layers	INT (widget)	Deep analysis: how many of the largest-contribution layers are fully measured. Default: 24.
device	COMBO (widget)	**auto** = GPU if free (like the real Resolve path), else CPU. **cpu** forces CPU.
report	STRING (output)	Full formatted report — connect to a Show Text node.
energy_1x_pct	FLOAT (output)	Energy retained at the current rank, aggregated (%).
amplitude_ratio	FLOAT (output)	Amplitude of the re-pack vs. the true sum (1.0 = identical).
resolve_active	BOOLEAN (output)	True when at least one Resolve group with ≥2 LoRAs is active.

14.2 · Overview mode

Overview is instant. The report lists every active group with its full mode tag (`SEQ` / `CONCAT` / `DARE [CHAN/ELEM]` plus `+TRIM` / `+RESOLVE`), the LoRAs and their weights, and flags groups where Resolve will actually do work ("← Resolve active", i.e. Resolve enabled and ≥2 LoRAs). The bottom line tells you which groups can be measured — switch `analysis_depth` to **Deep analysis** for that.

14.3 · Deep analysis

Deep analysis loads the group's LoRAs and measures the Resolve re-pack against the true merged result, per group:

- **Layers** — how many layers exist, how many have ≥2 competing sources, how many were measured (capped by `max_layers`, ranked by contribution).
- **Energy retained at 1× / 2× / 4×** — how much of the merged signal survives at the current rank (1×) and what a bigger re-pack would recover (2×/4×).
- **Cosine** — direction match (≈0.9 means the merge points the right way).
- **Amplitude (repacked/true)** — overall loudness of the re-pack (0.90 = ~10% quieter).
- A short per-group **verdict** plus a total across all Resolve groups.

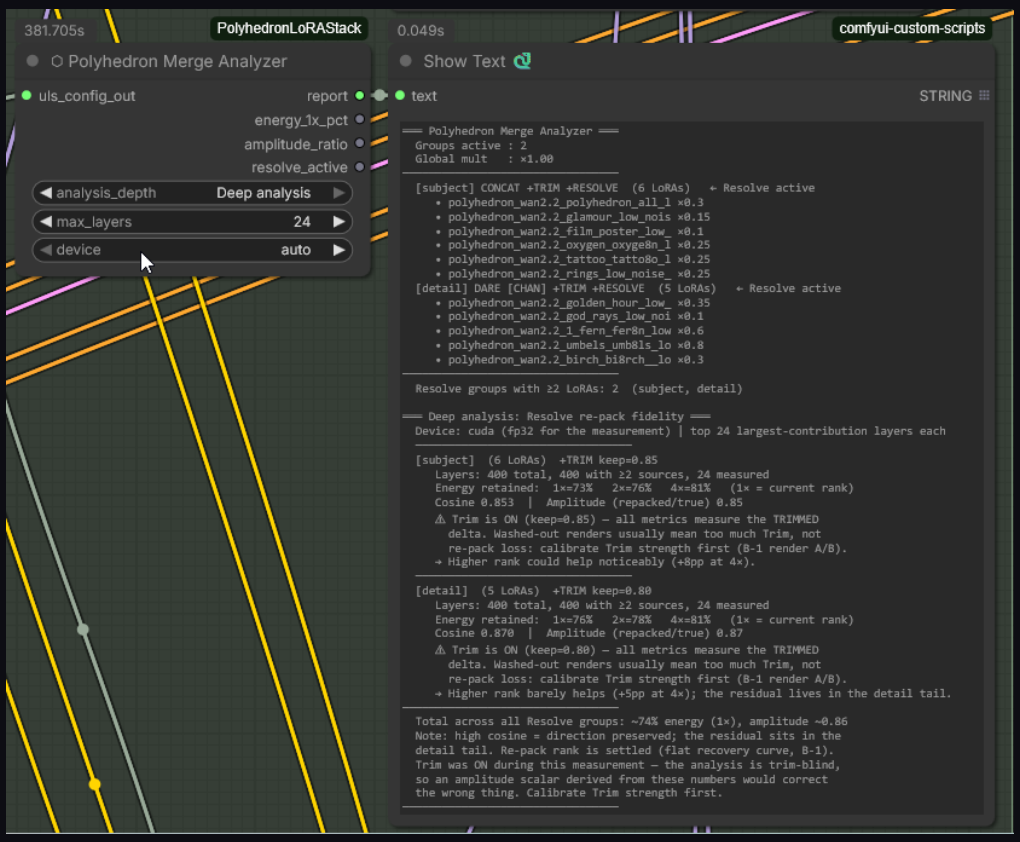

Deep analysis report — energy curve, cosine, amplitude, and the Trim warning.

Reading the numbers

A *flat* energy curve (only a few points gained from 1× to 4×) means a higher re-pack rank is not worth it: the residual lives in the fine-detail tail. High cosine = the direction is preserved.

⚠ Trim and the metrics

With Trim ON, all metrics measure the *trimmed* delta (the report warns inline). Washed-out renders are usually **too much Trim**, not re-pack loss — calibrate the Trim strength first (section 3.7).

14.4 · Performance, caching and cancel

- The result is **cached** — the analysis re-runs only when its inputs change, not on every queue.
- Deep analysis prints **live progress** to the console while it works: `[PLS] ANALYZE [group] layer i/N dev layer=…s cum=…s` .
- ComfyUI's red × **cancels** a running deep analysis promptly.
- `device` **auto** uses the GPU exactly like the real Resolve path; **cpu** forces CPU (slower, but VRAM-free).

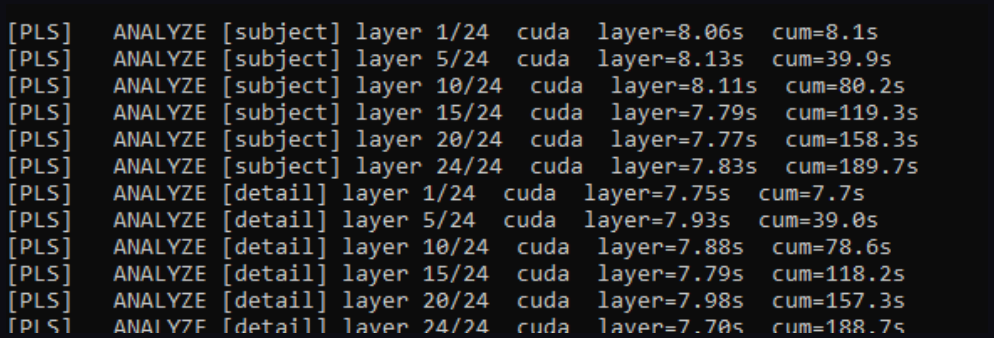

Live [PLS] ANALYZE progress lines in the console during a deep analysis.

© Polyhedron · All rights reserved
Civitai: civitai.red/user/Polyhedron_AI · Patreon: patreon.com/c/polyhedron_ai

Part II — Addendum A · Added since this part was written

Applies to: All models

Part II describes the LoRA Stack as it was built for WAN 2.2. Its pages stand as they are; these are the controls that came later.

In the group popup (right-click a group pill)

Control	What it does
Strength	One factor ×0.00 … ×2.00 on every LoRA of the group, model and CLIP weight alike: the group gets louder or quieter, the ratio inside it stays. Works in every mode, SEQ included.
Energy cap — overlap-neutral	Off by default. Measures how much the group's LoRAs pile up in the same direction; if they do, scales the whole group so it carries exactly the energy of its LoRAs taken one by one. Never boosts.
Bake	Writes the group as *one* LoRA to `loras/polyhedron_baked/` (rank 32 / 64 / 128 / full), to be loaded at 1.0 in its place. What is baked is what the Stack runs: strength, Trim and the CONCAT sum; DARE and Resolve are not baked.

On the node

Control	What it does
Apply — auto / BAKED / BYPASS	**BAKED** merges the LoRAs into the weights; **BYPASS** runs them as a forward hook and leaves the base weights untouched. **auto** = baked: on Frank's A/B (MiniMax H3, int8, 14 LoRAs) baked looked better and ran about 10 % faster per step. Bypass stays one click away.

Engine and Analyzer

Where	What changed
LoRA Engine	Applies a MiniMax H3 **PDD Acc** file whole — the trunk LoRA and its head bank — or refuses it whole, with the reason. Never half.
Merge Analyzer	Says when a group cannot merge and runs as SEQ instead (mixed key naming, LyCORIS/LoKr, DoRA), and marks the odd rows out. New depth **Merge check (vs SEQ)**: builds each group twice on the connected model — once through ComfyUI's own loader, once through the Stack's merge — and measures the difference.

MODEL NOTES

MiniMax H3	● Apply auto = baked (the A/B above). ◐ PDD Acc: H3 only.
WAN 2.x	○ Baked vs bypass on a quantized WAN has not been measured.

Part II — Addendum B · Model notes, chapter by chapter

What each chapter of Part II means on MiniMax H3. WAN 2.2 is what the chapters were written for; where nothing is said, they apply as written.

Chapter	On MiniMax H3	
3 · LoRA Stack — merge modes	H3 is CFG-distilled (cfg 1): nothing pulls the sample back toward the prompt, so whatever noise a cleanup writes reaches the picture. On a joint audio-video model the Stack therefore runs **DARE as CONCAT** and switches **Resolve off**, and says so in the console. **Trim stays** (deterministic, no random mask). SEQ and CONCAT are equal to bf16 rounding.	◐
	Measured against the SEQ sum (2 / 4 / 8 LoRAs): DARE raised the delta energy by 2 / 9 / 25 %; Resolve shrank it to 0.69 / 0.46 / 0.32 of the sum.	◐
4 · LoRA Engine	Holds the turbo LoRAs of the fox templates; PDD Acc files apply whole (Addendum A).	●
5 · LoRA Inspector, **8 · Previews**	As written.	
7.2 · Dual-noise workflow	Not used: H3 is one model, one Stack.	
9 · Token Counter	Its budget is UMT5's 512 tokens (WAN). H3 reads the prompt with Qwen3-VL; no budget for H3 is established yet.	○
10 · Select Model Switch	Useful for any model; the two-path layout of the chapter is WAN's. In the fox templates Load Model's own `select` picks the file.	
11 · WAN Bridge, **12 · Frame Inflate / Pick Frame**	WAN 2.x only.	
13 · Sigma Nodes	H3 runs on a trained grid: the Sigma List (Part VIII, chapter 5), not the Sigma Curve.	●
14 · Merge Analyzer	The Resolve measurement describes a cleanup that does not run on H3. Overview and Merge check (vs SEQ) apply.	◐

Part III — CLIP Text Encode

Polyhedron Suite · User Documentation

> One node in place of a small chain. The positive prompt is assembled from several fields instead of one wall of text, so a trigger block, the subject and a style block can be edited without hunting through a paragraph. A negative prompt sits in the same node and can be switched off. Both are encoded through ComfyUI’s own encoder — reused, never re-implemented — and the composed strings come back out as text, so what the encoder saw is what you can read.

1 · Overview
2 · Segments — the prompt in parts
3 · Comments — headings that cost nothing
4 · The negative
5 · External text
6 · The footer — words, characters, tokens
7 · Search — find it in every field

1 · Overview

Where a normal setup needs a text node, two encoders and a bit of wiring, this is one node with everything in view: the prompt in parts, the negative beside it, the cleanup switches on top and a live count at the bottom.

Two positive segments, the negative below them, the cleanup switches on top and the live footer at the bottom.

Inputs and outputs

Pin	Direction	Carries
`clip`	in	The CLIP / text encoder — the same pin as the core node.
`pos_external`	in	Optional text from elsewhere: a captioner, a Stack's trigger words, any `STRING` source. Folded into the positive prompt (section 5).
`neg_external`	in	Optional external text for the negative prompt.
`positive`	out	The encoded positive conditioning.
`negative`	out	The encoded negative conditioning — valid even when the negative is switched off.
`positive_text`	out	The composed positive prompt, exactly as encoded.
`negative_text`	out	The composed negative prompt, exactly as encoded.
`full_text`	out	Both prompts in one string — for logging, or a Save node's metadata.

The controls at a glance

`segments` sets how many positive fields take part. `separator` decides how they are joined into one prompt. `strip_comments` with `comment_markers` removes your section headings before encoding; `strip_newlines` flattens the remaining line breaks. `use_negative` turns the negative box on and off. `external_mode` decides whether wired-in text is appended, prepended, or replaces the fields entirely.

The footer keeps count while you type — words and characters — and adds the token figure from the last run.

2 · Segments — the prompt in parts

`segments` decides how many positive fields take part. Turn it up and another empty field appears; turn it down and the field disappears from the node.

Hiding is not deleting. The text of a hidden segment stays with the node, survives saving and comes back untouched when you turn the count up again. But while it is hidden it is also **out of the prompt** — the encoder only ever sees the fields that are showing.

That makes the control useful for more than tidiness: park a whole block of styling in segment 3, turn the count down to 2, and you have switched it off without losing a word. The footer confirms it immediately, because the word count drops by exactly that block.

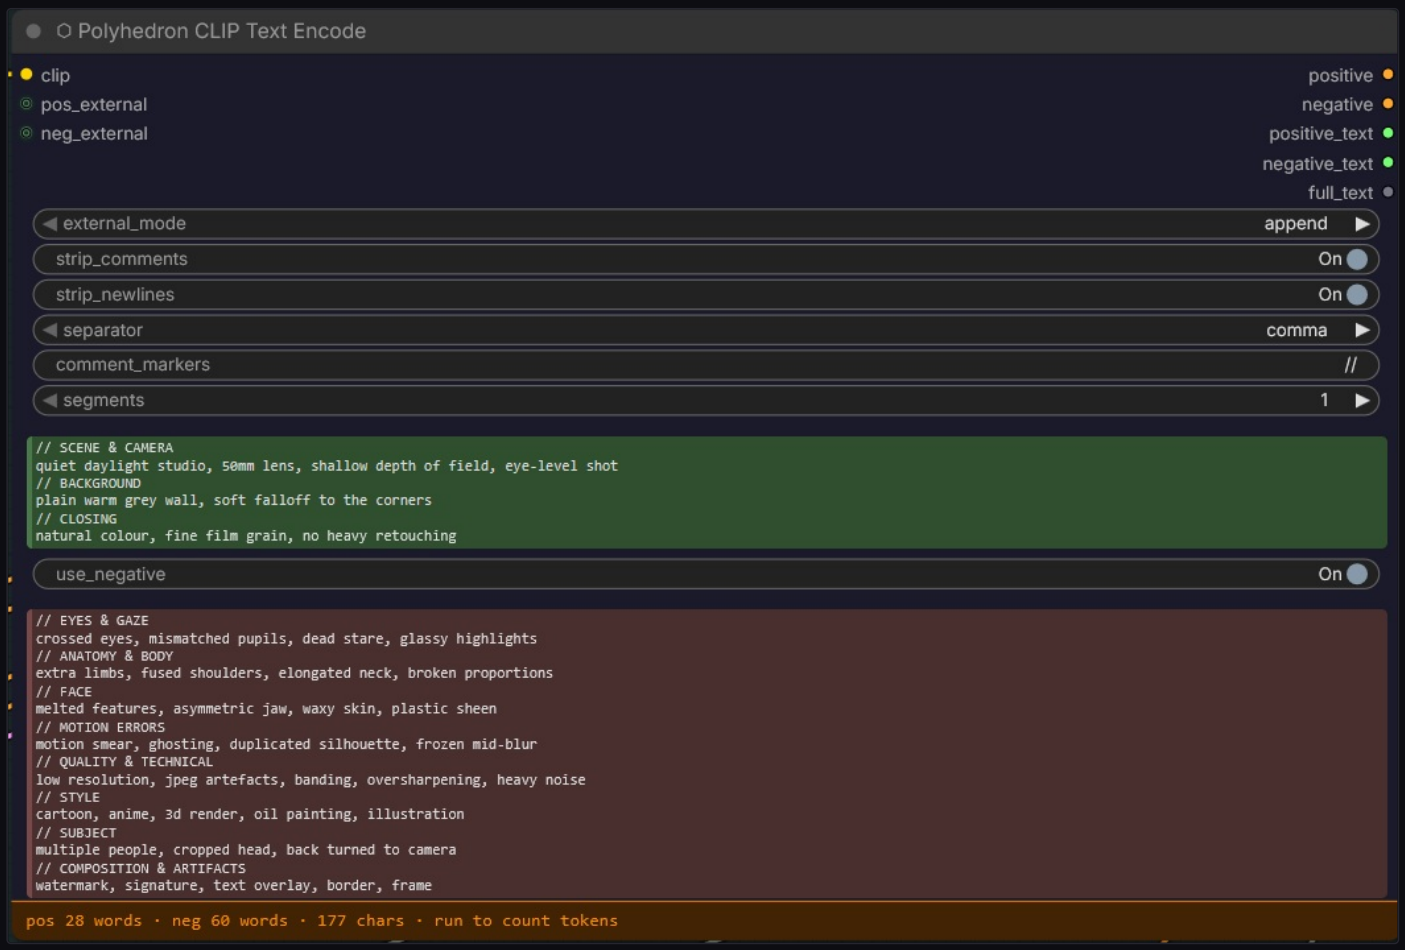

The same node with `segments` turned down to 1: the second block is out of sight and out of the prompt. The footer drops from 99 words to 28.

The boxes grow with the text

A prompt field is never a peephole. Each visible box sizes itself to what is in it — type another line and the box gets a line taller, delete one and it shrinks back — and the node follows, so the whole prompt is readable without scrolling inside a two-line window.

An empty field still keeps about two lines of height, so it is easy to hit with the mouse. Growth stops at a generous ceiling: paste something monstrous and the box scrolls at that point instead of turning the node into a mile-high column. Between those two limits the rule is simply that what you typed is what you see.

Joining the parts

`separator` decides how the fields are joined into the single prompt that gets encoded. `comma` puts `, ` between them — the usual choice. `newline` keeps them on separate lines, `space` runs them together, `none` concatenates them with nothing in between.

The separator applies *between* segments, not inside them; whatever you typed within one field stays as it is.

3 · Comments — headings that cost nothing

Long prompts get unreadable fast. `strip_comments` lets you keep section headings in the box that never reach the model: everything from a comment marker to the end of that line is removed before encoding.

That is what makes a structured prompt possible. `// SCENE & CAMERA` , `// SUBJECT` , `// HANDS` — they organise the prompt for you and cost nothing at the encoder. Switch the control off and they become part of the text like any other words; the footer shows it at once.

```
// SCENE & CAMERA
quiet daylight studio, 50mm lens,
shallow depth of field, eye-level shot
// BACKGROUND
plain warm grey wall, soft falloff to the corners
// CLOSING
natural colour, fine film grain, no heavy retouching
```

What you write. *The* `//` *lines are yours — headings, reminders, anything you want beside the prompt rather than in it.*

```
quiet daylight studio, 50mm lens,
shallow depth of field, eye-level shot,
plain warm grey wall, soft falloff to the corners,
natural colour, fine film grain, no heavy retouching
```

What the encoder receives. *Every marked line is gone and what is left is joined by the separator. Nothing else was touched — and nothing you wrote for yourself became a token.*

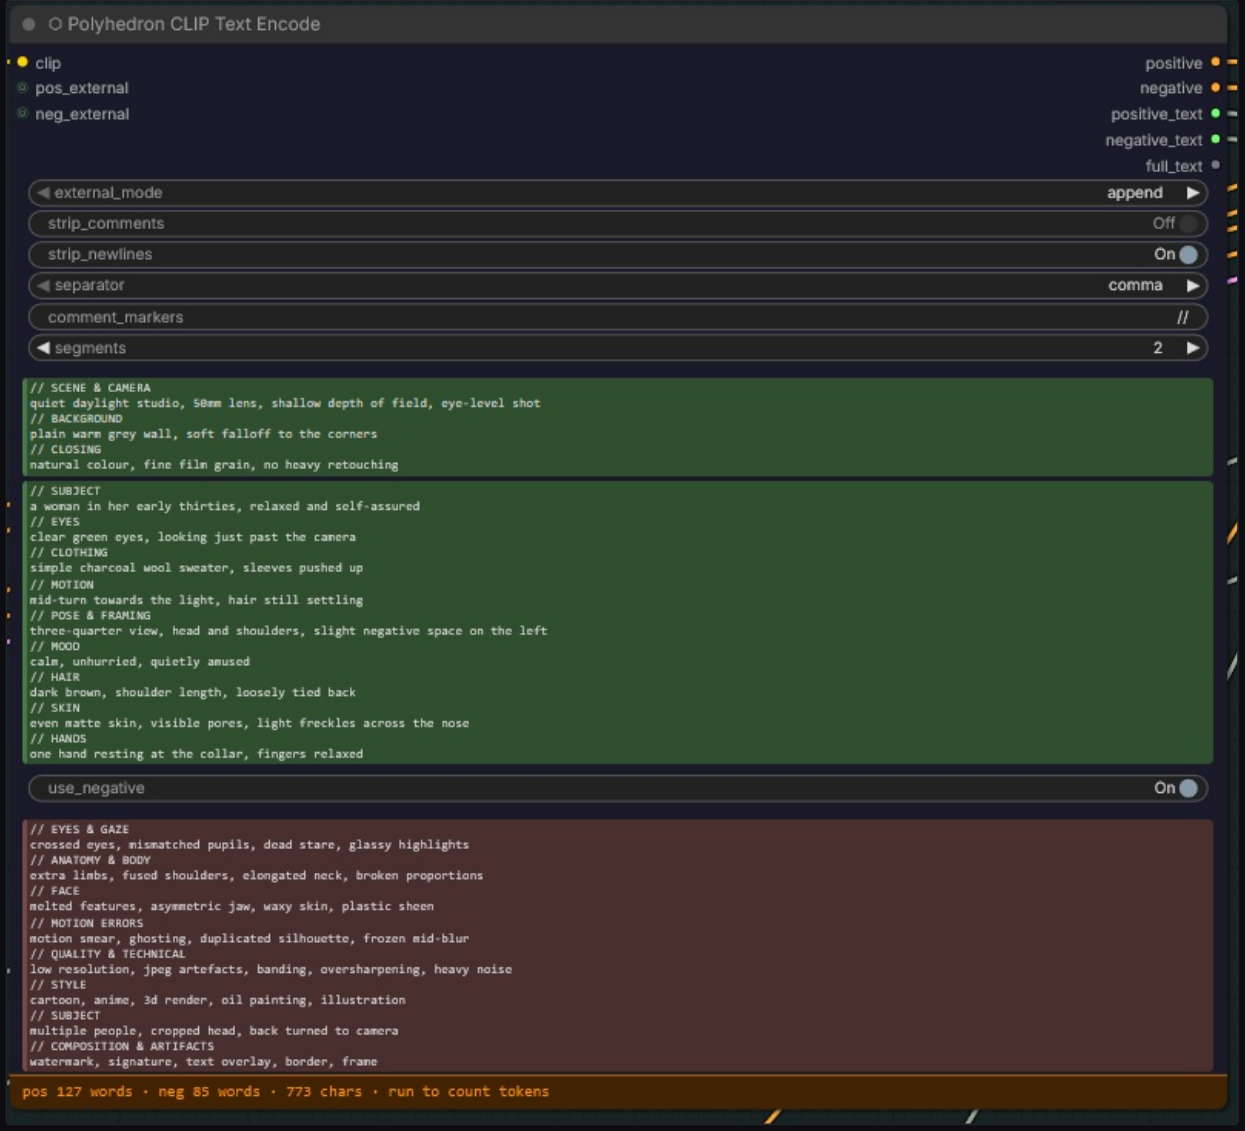

The same prompt with `strip_comments` switched off. The headings now count: 127 words instead of 99, and 773 characters instead of 649.

What comments are for

Two things, and both of them matter once a prompt grows past a few lines.

Structure. A long prompt is a list of decisions — scene, camera, subject, clothing, mood, hands. Written as one paragraph it becomes unsearchable within a week; you end up re-reading the whole thing to change the lens. With headings the prompt gets a table of contents: you scroll to `// CLOTHING`, change one line, and leave everything else alone. The prompt in this manual is built exactly that way, and none of those headings reaches the encoder.

Notes to yourself. The second use is the one people discover later. Anything you want to keep *next to* the prompt but not *in* it goes behind a marker: the seed that worked, the LoRA this wording was written for, a line you took out but might want back, a reminder that the model ignores a certain word. It travels with the workflow, it is there when you open the file in three months, and it costs nothing at generation time.

> **Why this is not a small thing.** Every word in the prompt competes for the encoder's attention, and every text encoder has a limit. Notes and headings left in a prompt do not merely take up room — they are read as content, and a heading like `SUBJECT` or a stray `TODO: try 0.8` is exactly the kind of stray noun that shows up in the picture. Comments let you keep the documentation and pay nothing for it.

Choosing the markers

`comment_markers` decides what counts as a marker. The default is `//`, borrowed from code, because it is rare in ordinary prompt text. Enter a **space-separated list** to use several at once — `// # ***` gives you three, and any of them opens a comment.

Use whatever suits your habits. `#` if you come from Python or YAML, `--` from SQL, `;` or `***` if you want something that never occurs in your prompts. Several markers are useful when they mean different things to you: `//` for section headings and `#` for private notes, say, so you can find the notes again with a search. The node does not distinguish between them — that meaning is yours — it strips them all alike.

The tooltip states the rule: a space-separated list, a marker counts at the line start or after a space, and an empty field strips nothing.

`// SUBJECT`	Line start — the whole line is a comment and goes.
`//SUBJECT`	The same. There is no leading-space rule to remember.
`red dress // maybe blue`	The marker follows a space, so the note goes and `red dress` stays. Comments do not have to sit on their own line.
`https://example.com`	Survives. The `//` here follows a colon, neither a line start nor a space — which is precisely why the rule is written that way.
empty field	Nothing is stripped at all, whatever `strip_comments` says.

A comment always runs to the end of its line — there is no closing marker and no block comment. That is deliberate: it keeps the rule small enough to hold in your head while you write.

Why comments go first

Comments are removed line by line, and only afterwards does `strip_newlines` flatten the remaining line breaks into spaces. The order matters: flatten first and a heading like `// SUBJECT` would swallow the whole line that follows it, because after flattening there is no line end left to stop at. The node does it the safe way round, so you can write headings above their content without thinking about it.

`strip_newlines` itself is the tidy-up afterwards: your prompt keeps its readable shape in the box, while the encoder gets one continuous line.

4 · The negative — there, or honestly empty

`use_negative` switches the negative prompt off. The box disappears from the node and the footer drops to zero words.

What does not disappear is the `negative` output. It still carries a valid conditioning — an encoding of an empty prompt — so anything wired to it keeps working. Nothing to unplug, nothing to re-route, no red link when you change your mind mid-workflow. Switch it back on and your text is still in the box; turning the negative off hides it the same way a hidden segment is hidden, and it comes back untouched.

This matters for models that are meant to run without a negative. Some distilled and Lightning setups do their best work with an empty negative and CFG at 1.0; with a normal node you either leave an empty box lying around or rebuild the wiring. Here it is one switch, and the graph does not notice.

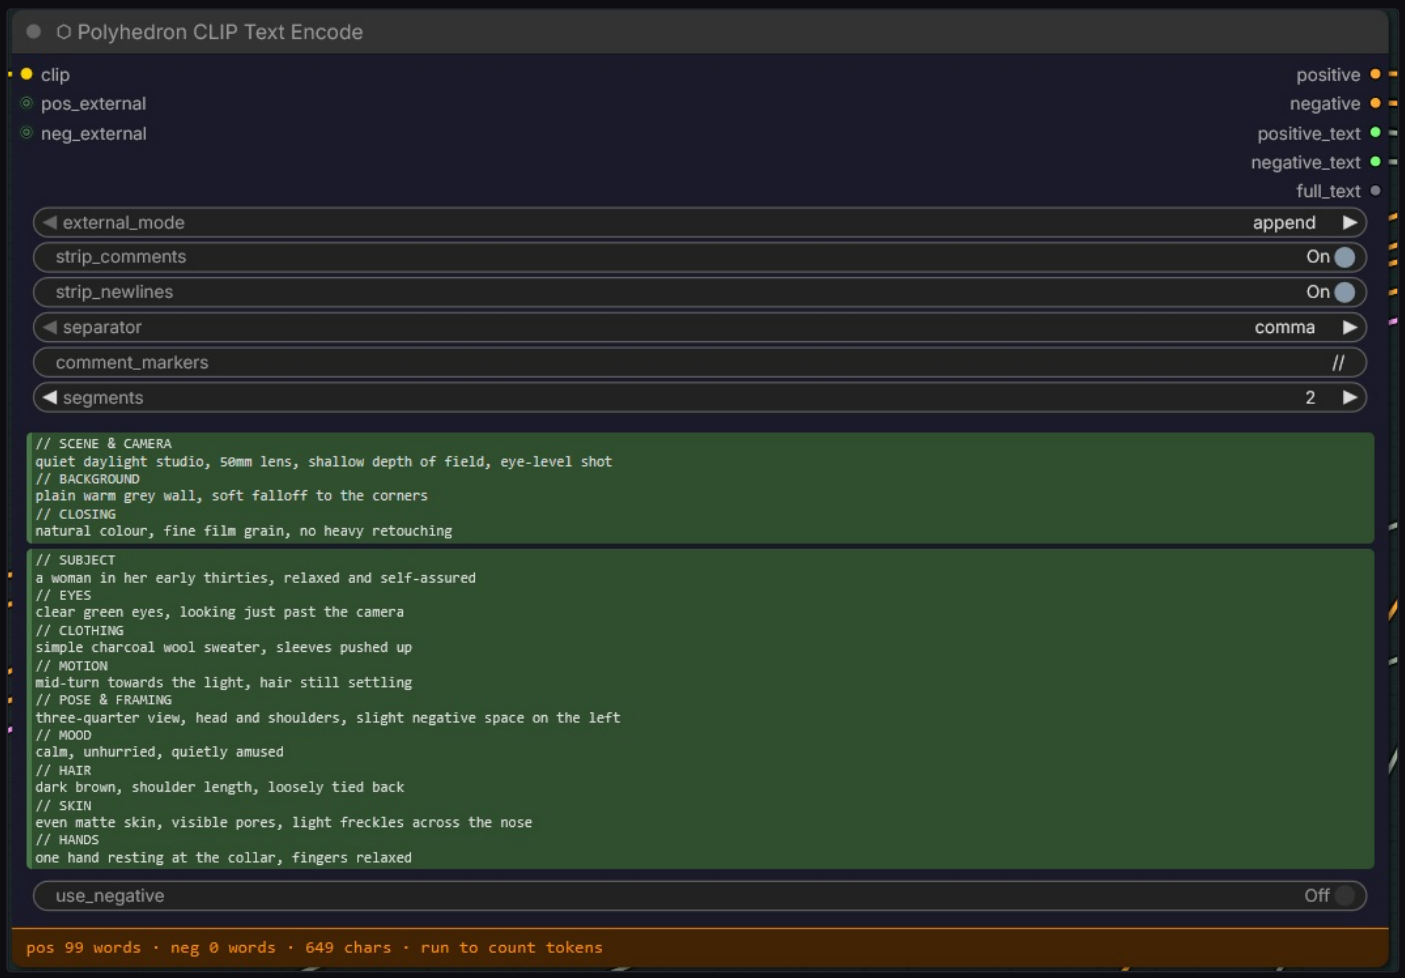

`use_negative` off: the box is gone and the footer reads `neg 0 words`. The `negative` output still delivers a valid, empty conditioning.

MODEL NOTES

MiniMax H3	◐ Runs at cfg 1: the sampler does not compute the negative branch, so the negative prompt has no effect. Leave it on or off — the run is the same.
WAN 2.x	○ With CFG > 1 the negative works as described; with a Lightning LoRA (cfg 1) it does not.

5 · External text — prompts from elsewhere

Two optional inputs take text from other nodes: `pos_external` feeds the positive prompt, `neg_external` the negative. Anything with a `STRING` output fits — a captioner, a Stack handing over its trigger words, or a plain text node.

Mode	Result
`append`	The external text goes behind your segments. The default — your own wording leads, the incoming text follows.
`prepend`	It goes in front. Useful for trigger words that a LoRA wants to see early in the prompt.
`replace`	It takes over entirely. The segments stay in the node, untouched and saved, but the prompt is the external text alone.
`fill {pos_N}`	The external text is a *form*: every `{pos_1}` … `{pos_6}` in it takes that segment as typed, `{prompt}` all shown segments, and the filled text is encoded. The Cine Timeline sends such a form (Part VII, chapter 3): the parts that never change live in the segments, the parts that steer a shot in the timeline.

The mode applies to both sides at once — there is no separate setting for the negative.

Where that text comes from

The obvious source is another prompt fragment you keep somewhere else. The more interesting one is a node that **writes the text for you**.

Vision models do exactly that. A captioner such as **Florence2** looks at an image and returns a description of it as a `STRING` — the subject, the setting, the lighting, in as much detail as you ask for. Wire that output into `pos_external` and the description becomes part of the prompt without you typing a word of it. The same works for any interrogator or tagger that hands back text: WD14-style taggers, an LLM node that rewrites a sketch of an idea into a full prompt, a node that reads the caption sidecar of a training image.

That turns the three modes into three quite different workflows:

With a captioner on `pos_external`	Result
`append`	Your segments set the frame — camera, style, quality — and the description of the reference image follows. The usual choice for image-to-image and for style transfer: you keep control of the look, the picture supplies the content.
`prepend`	The description leads and your own wording refines it afterwards.
`replace`	The caption *is* the prompt. Useful for batch work: point a captioner at a folder and every image is re-generated from its own description, while your segments sit in the node untouched, ready for when you switch the mode back.

Because the resolved text appears in the node after the run, you can always see what the captioner actually said — and the footer counts it, so a chatty vision model that quietly eats half your token budget shows up as a number instead of a mystery.

Seeing what arrived

Wire an input and a field for it appears in the node. Until the first run it shows a placeholder, because the text only exists once the graph has actually delivered it; run once and the resolved text is there to read. From then on it is counted with everything else in the footer, so the word and token figures tell the truth about the whole prompt, not just the parts you typed.

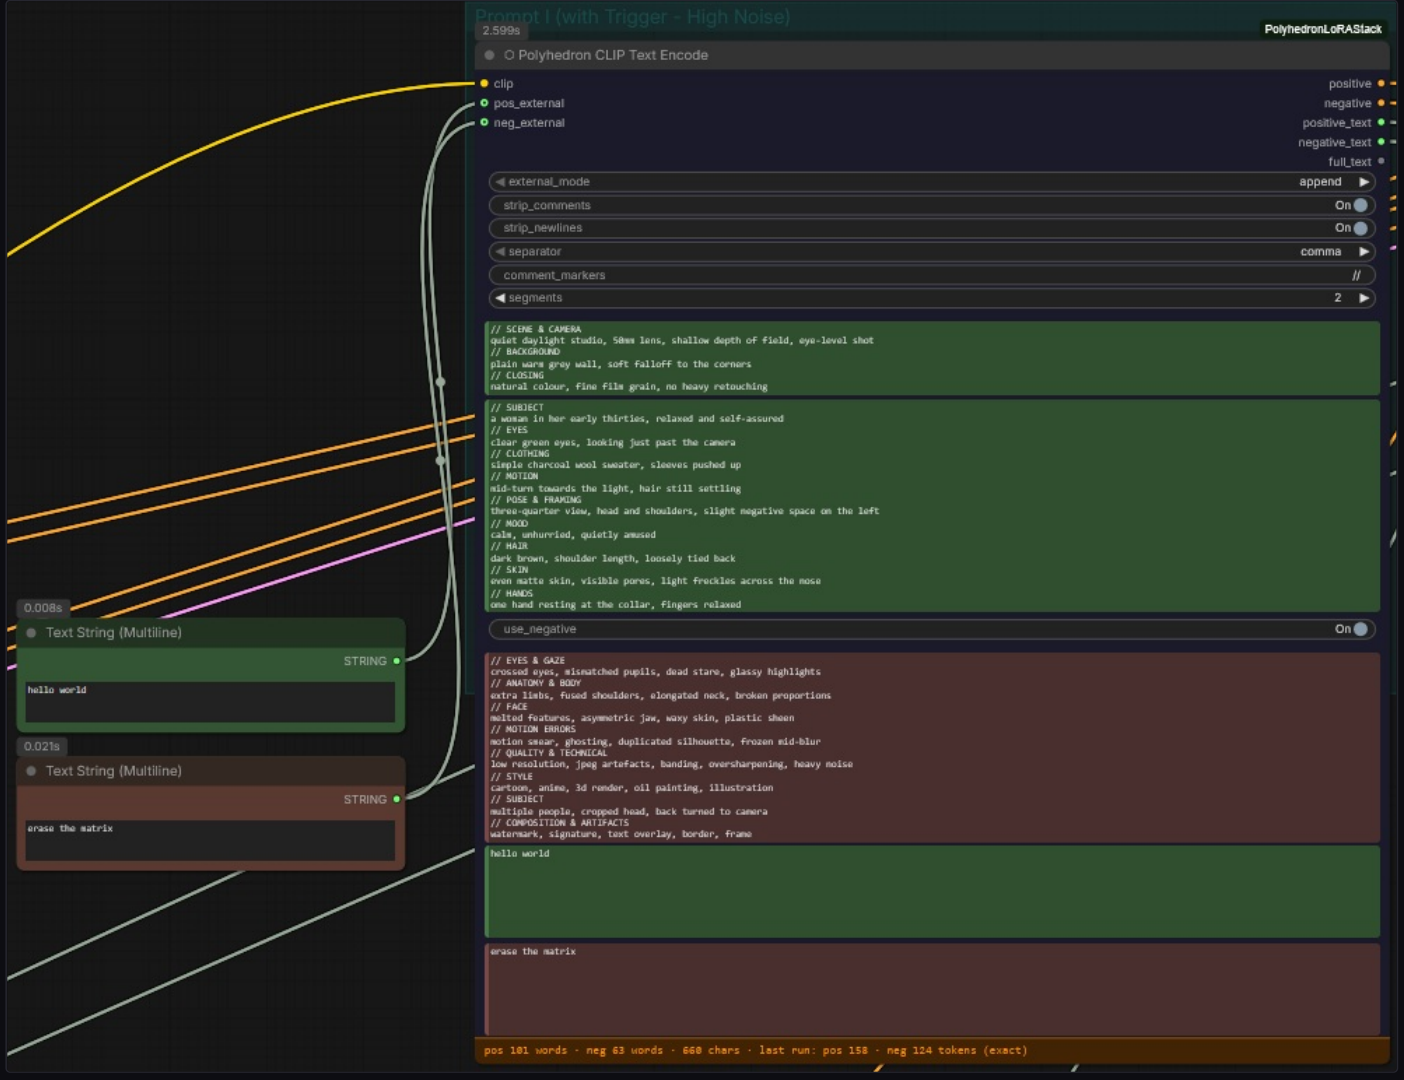

Two text nodes feeding `pos_external` and `neg_external` in `append` mode. After the run their text shows in the node and counts in the footer: 101 words instead of 99, 63 instead of 60.

> **One thing to know.** `neg_external` only works while the negative is switched on. With `use_negative` off, the negative prompt is not assembled at all, and a wired external negative is silently ignored. If a negative input seems to do nothing, that switch is the first place to look.

6 · The footer — words, characters, tokens

The strip along the bottom of the node is the honest account of what will be encoded. It reads, for example: `pos 99 words · neg 60 words · 649 chars · last run: pos 155 · neg 119 tokens (exact)`.

Two clocks, not one

Words and characters are counted **as you type**, and they already respect your cleanup settings — with `strip_comments` on, your section headings are not in the figure. Resolved external text is included too, so the count describes the whole prompt.

The token figure comes from the **last run**. Tokens can only be counted by the tokenizer that belongs to your text encoder, and that lives in the backend; so after every edit the field falls back to `run to count tokens` until the graph has run again. That is not a glitch — it is the difference between a guess and a measurement.

Reading	Means
`exact`	Counted with the encoder’s own tokenizer.
`heuristic`	The tokenizer was not reachable; the figure is a calibrated estimate.
`run to count tokens`	The text changed since the last run.

The count comes from the same function behind the Polyhedron Token Counter, so the two never disagree. This node only ever *displays* the number; the Token Counter remains the place for limits and warnings.

The text outputs

`positive_text` and `negative_text` hand back exactly the strings that were encoded — after the comment pass, after flattening, with the segments joined and any external text folded in. Wire one into a Token Counter to enforce a limit, into a Show-Any node to read it, or into the Save node so the prompt that actually ran is written beside the picture. `full_text` carries both at once for logging.

> **Why this exists.** A prompt that goes through several nodes before it reaches the encoder is easy to lose track of. These outputs close that gap: what the encoder saw is what you can read, character for character.

7 · Search — find it in every field

Applies to: All models

A search row sits under `segments`. Type a word, half a sentence or a whole paragraph, and every hit is marked live in every visible prompt field — the positive segments first, then the negative.

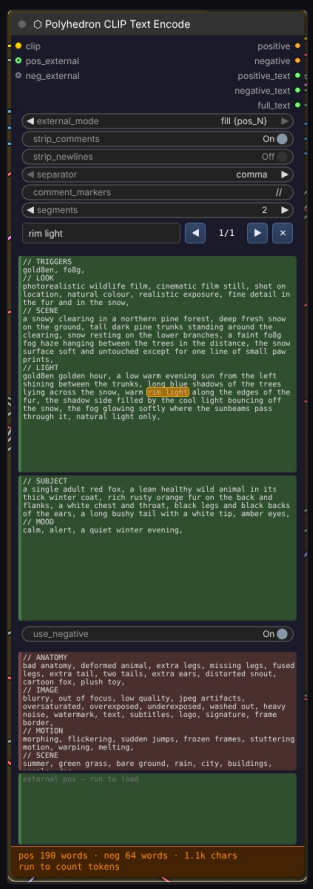

“rim light” found in segment 1 of the fox template: the hit is marked, the counter says 1/1.

Key / button	What it does
Enter / ▶	next hit
Shift+Enter / ◀	previous hit
Esc / ✕	clear the search
Ctrl+F in a prompt field	opens this search with the selected text, instead of the browser's find bar

Matching is literal and ignores case; any run of spaces and line breaks matches any other, so a passage pasted from elsewhere is found even where the field breaks its lines differently. The marks are drawn over the field — the text itself is never touched.

Part IV — Sampler

Polyhedron Suite · User Documentation

> One node for both sampling architectures. In **Single** it is a superset of KSampler and KSampler (Advanced) — a real denoise field beside the step window, the full sampler and scheduler lists, add_noise. Switch the mode pill and the same node runs a noise-split **two-expert** denoise, the architecture Wan 2.2 ships. Nothing is rebuilt in between: what does not apply goes dim, everything else stays where your eye expects it. And the picture inside the node is a live preview that can animate the whole clip while it denoises.

1 · Overview
2 · Single — the everyday case
3 · High + Low — two experts, one node
4 · Live preview — watching it work
5 · Putting it together

1 · Overview

If you have used the KSampler, you already know most of this node. What it adds is everything that normally costs a second node or a different one: the advanced step window, a second expert, and a preview worth looking at.

Pin	Direction	Carries
`model`	in	The model. In `High + Low` this is the **high-noise** expert.
`positive` / `negative`	in	Conditioning to include and to exclude.
`latent_image`	in	The latent to denoise — image or video.
`model_low`	in	Optional. The **low-noise** expert; connect it and switch the mode pill to `High + Low`.
`sigmas` · `sigmas_high` · `sigmas_low`	in	Optional external schedules. When connected they override the built-in schedule — not covered in this edition.
`noise`	in	Optional external noise source.
`LATENT`	out	The denoised latent.

The node in `High + Low`. The Single-only controls near the bottom are dimmed, not hidden — you always see the whole node and read from the grey what does not apply right now.

2 · Single — the everyday case

`seed` , `steps` , `cfg` , `sampler_name` , `scheduler` and `denoise` work exactly as you know them.

The three controls that usually cost a second node are here too. `add_noise` decides whether the run starts by adding noise at all — off when you are continuing a latent that already carries it. `start_at_step` and `end_at_step` cut a window out of the schedule, so a run can begin partway in or stop early. `return_with_leftover_noise` hands the latent on **unfinished** on purpose, for a second sampler to complete — the classic two-stage refiner setup, without swapping in the Advanced variant.

In `High + Low` these three go dim: the split is then decided by the Handoff, not by hand.

Sigma shift

`sigma_shift` applies a flow-matching shift to the model before the schedule is built. `0.00` means **off** — the node leaves the model's sampling untouched, which is correct when an upstream `ModelSamplingSD3` node or the model itself already provides one.

Wan 2.2 needs a shift. Without it a short run cannot converge and leaves residual noise that shows up as fine RGB speckle in flat areas. `8.0` matches the Wan MoE KSampler; `5.0` is the older Wan 2.1 convention and is too low for 2.2. A positive value here **overrides** rather than adds, so it takes precedence over anything set upstream.

The low expert's own shift

Directly underneath sits `sigma_shift_low` , the low expert's twin. Its default of **−1** reads as *same as high*: the low expert simply follows `sigma_shift` , which is how the node behaved before this widget existed — an older workflow loads and runs exactly as it did. **0** switches the shift off for the low expert alone, even while the high expert carries one. Any positive value is its own shift.

The case this was built for: Wan 2.2 with `8.0` on the high expert and `5.0` on the low one. That split used to need two separate `ModelSamplingSD3` nodes wired in front of the sampler — now it is two fields, and those nodes can come out of the graph.

> **Where it bites.** Like `scheduler_low` , this widget only takes effect in *Wan MoE parity*, where the low segment's schedule is built from the low expert. In *Continuous* both experts share **one** schedule, built from the high expert, so the field greys out — and if you set a value there anyway, the console says it is inert rather than letting you believe otherwise. In `Single` it greys out too, and an external `SIGMAS` curve switches it off along with the rest of the schedule controls.

3 · High + Low — two experts, one node

Some model families ship as a **pair**: one expert trained for the loud, early part of the denoise, one for the quiet, detailed end. Wan 2.2 is the prominent example.

The `Mode` pill switches the node from `Single` to `High + Low`, `model` becomes the high-noise expert, and `model_low` takes the second one. Everything else stays where it is — you do not rebuild the graph to change sampling architecture.

The Handoff

This is the one number that matters in this mode. It is a **noise level**, not a step count: every step whose sigma is at or above the Handoff runs on the high-noise expert, the rest on the low-noise expert. Raise it and the high expert covers fewer steps — only the loudest ones; lower it and it keeps working further into the run.

There is no automatic value, and that is deliberate: the right split depends on the task, not on the file. The Wan 2.2 conventions are **0.875 for text-to-video** and **0.900 for image-to-video**. Start there and move it if the result tells you to — too much high expert and fine detail stays mushy, too little and structure or motion never settles.

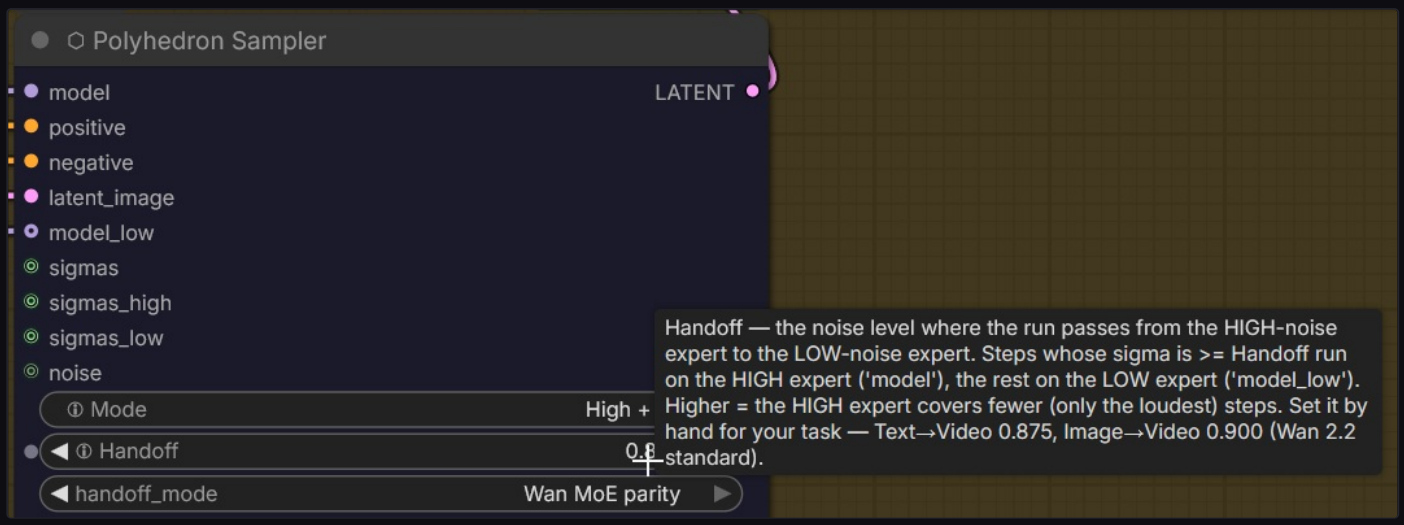

The Handoff is a noise level, not a step: everything at or above it runs on the high expert.

`cfg_low` gives the second expert its own guidance value, because the two halves rarely want the same one; distilled and Lightning LoRAs typically run the low pass at 1.0. `sampler_low` and `scheduler_low` do the same for sampler and schedule and default to *same as high*, so you only touch them when you actually want a different one.

MODEL NOTES

MiniMax H3	● One model: the Sampler runs in **Single**, cfg 1, with the Sigma List curve on `sigmas`.
WAN 2.2	○ High + Low is built for its two experts, as described.

Two ways to hand over

`handoff_mode` decides what happens at the seam.

Continuous runs both experts as **one unbroken denoise**. The high expert stops while leftover noise is still present and the low expert picks it straight up — mathematically the clean continuation, and this node's original behaviour.

Wan MoE parity reproduces the Wan MoE KSampler exactly. The switch happens **one step earlier**, the high expert finishes on a clean estimate of the final image, and the low expert re-noises that estimate with the *same* seed noise before denoising to the end. Use it when you want results that match the Wan reference workflow rather than the mathematically tidier path.

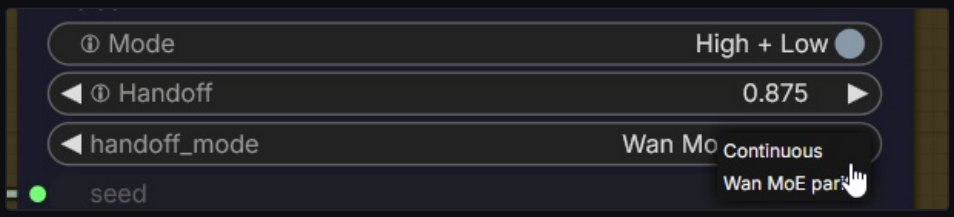

Two seams: the unbroken continuation, or exact parity with the Wan MoE KSampler.

> **Changing the mode re-plans the run.** Both the mode pill and `handoff_mode` recompute what is active the moment you touch them, so the greyed-out controls always tell the truth about the run you are about to start.

4 · Live preview — watching it work

`preview_mode` picks the decoder for the picture inside the node. It is visualisation only: whatever you choose, the latent that leaves the node is identical.

Still · shows a single frame that refreshes each step — the behaviour you know from the KSampler. `Still · ComfyUI` hands the job to ComfyUI's own previewer and honours your `--preview-method` setting; `Still · latent2rgb` forces the model-free view, which costs nothing and needs no files.

Video · animates *every frame* of the predicted latent. On a still image there is one frame and nothing moves; on a video the preview plays the whole clip while it is being denoised, so you see the motion long before the run ends. `Video · latent2rgb` comes in a smooth and a crisp variant. The two `Video · TAE` modes decode through a small approximate decoder instead: slower per step, but far closer to the finished picture.

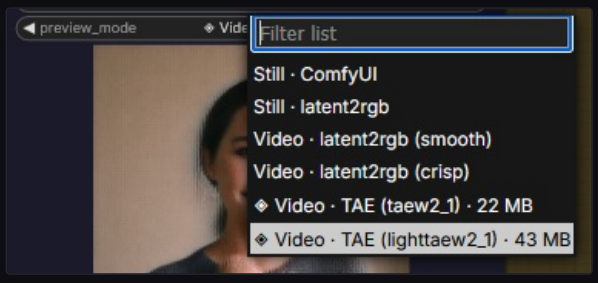

Six decoders. The two TAE entries carry their download size, because they are files that have to be on disk. The list filters as you type.

Three moments of the same run in a `Video ·` mode: the preview is not one frame refreshing — the whole clip plays while it denoises.

The TAE decoders

Pick a TAE mode whose file is missing and the node says so with a small amber notice instead of failing silently, and offers to fetch it. The download goes through the pack's one download door: staged to a temporary file, checksum-verified, then moved into place, so an interrupted download never leaves a broken decoder behind.

Switching mid-run

The mode can be changed **while a render is running**. The change is picked up on the next step — useful when a long video run has started and you decide you want the better decoder after all. Again: preview only, the result does not change.

5 · Putting it together

A plain image

Model, conditioning and an empty latent in, mode on `Single`, sampler and scheduler to taste. Nothing else needs touching.

Wan 2.2 video

Both experts in — the high one on `model`, the low one on `model_low` — mode on `High + Low`, Handoff at `0.875` for text-to-video or `0.900` for image-to-video, `sigma_shift` at `8.0` unless it comes from upstream. Distilled or Lightning LoRAs usually want `cfg` and `cfg_low` at `1.0`. Pick a `Video ·` preview mode and you can watch the motion settle instead of guessing.

A two-stage refine

First sampler in `Single` with `end_at_step` set and `return_with_leftover_noise` on; the second picks the latent up with `add_noise` off and `start_at_step` where the first one stopped.

With a Polyhedron CLIP Text Encode in front

Its `positive` and `negative` go straight into this node's conditioning inputs. Because that node also hands back the composed prompt as text (Part III, section 6), you can wire `full_text` into a Save node and keep the exact prompt beside the picture that came out of this sampler.

> **Not covered here.** The `sigmas`, `sigmas_high` and `sigmas_low` inputs accept an external schedule and override the built-in one entirely. They are deliberately left out of this edition.

MODEL NOTES

MiniMax H3	● Pick **Video · TAE (taeh3)**, 22 MB — the WAN TAEs do not fit H3's latent.
WAN 2.x	○ taew2_1 or lighttaew2_1, as described.

Part V — Upscale & Interpolate

Polyhedron Suite · User Documentation

> Three nodes for what happens **after** the sampler. **Fast Upscale** resizes — image, video and mask together, so the mask never drifts out of register. **Power Upscale** is the slow, thorough one: it cuts the frame into overlapping tiles and re-samples each of them, with a second expert if you want one. **Interpolate** invents the frames between your frames. All three report what they are doing while they do it, because on a long clip the difference between working and hanging should never be a guess.

1 · Fast Upscale — size without invention
2 · Power Upscale — the thorough one
3 · Power Upscale — watching it work
4 · Interpolate — the frames in between
5 · Choosing between them
6 · Added since — refine order, restore, a wired curve, cuts

1 · Fast Upscale — size without invention

A resize, optionally through an upscale model, and nothing else. No diffusion, no sampler, no seed. A 65-frame clip is done in seconds rather than minutes, and the result is exactly as detailed as what you put in — only bigger.

Pin	Direction	Carries
`image`	in	Frames. One for a still, many for a clip.
`video`	in	A video object, as an alternative to loose frames.
`upscale_model`	in	Optional. An ESRGAN-family model. Without it the node is a pure resize.
`mask`	in	Optional. Scaled **with** the image, by the same rule.
`image` · `video` · `mask`	out	The scaled result, in all three shapes.
`width` · `height`	out	The dimensions actually produced — after `divisible_by` has had its say.

The controls

Control	What it does
`size_mode`	`factor` multiplies by `upscale_by`; the other modes use `width` and `height`. The fields that do not apply stay visible, so you can always read what the node would do in the other mode.
`resize_method`	The filter. Most run on the GPU; `lanczos (cpu)` **is honestly labelled** because it is a PIL path and cannot run anywhere else. Ask it for a GPU device and it refuses out loud instead of quietly doing something different.
`device`	Where the resize runs. On the GPU it is dramatically faster.
`divisible_by`	Snaps the result to a multiple — 8, 16, 32. Samplers downstream expect it, and it is easier to snap here than to discover it there.
`per_batch`	How many frames are worked at once. A long clip does not have to fit in VRAM in one piece.
`keep_proportion` · `crop_position` · `pad_color`	What happens when the target does not share the source's aspect ratio: stretch it, crop it (and from where), or pad it (and in what colour).

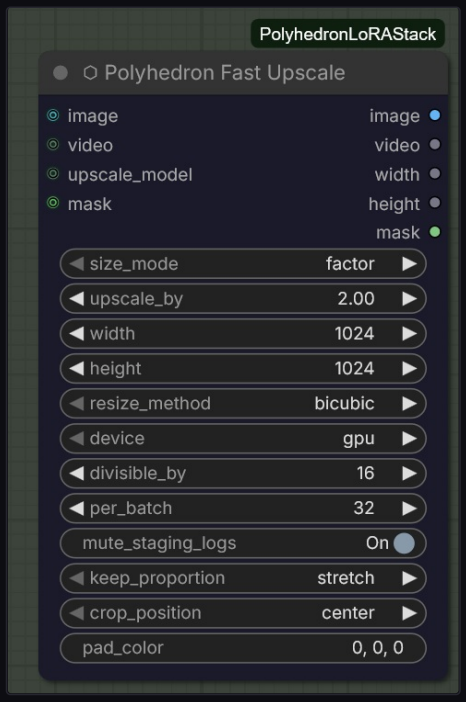

Fast Upscale, whole. Four pins in, five out — and the mask comes back scaled by exactly the rule the image was scaled by.

2 · Power Upscale — the thorough one

This one does not just make pixels bigger, it re-samples them. The frame is cut into overlapping tiles; every tile gets a partial denoise at the larger size and is blended back. Detail that was never in the source can appear — which is the point, and also the risk.

Pin	Direction	Carries
`image` · `video`	in	What to enlarge.
`model`	in	The model for stage H.
`model_low`	in	Optional. The model for stage L — connect it and switch the **Mode** pill to `High + Low`.
`positive` / `negative`	in	Conditioning for the refine passes.
`vae`	in	For encoding and decoding around each pass.
`upscale_model` · `upscale_model_low`	in	Optional ESRGAN-family models — **one per stage**, and they may differ.
`image` · `video`	out	The finished result.

> **Two stages, not two halves.** Stage L does not continue stage H's schedule the way the Sampler's two experts do. It starts from the **finished, decoded, re-upscaled** image of stage H and runs its own fresh partial denoise with its own steps and denoise. There is no seam to keep continuous — which is exactly why `sampler_low` and `scheduler_low` are honoured unconditionally here, while in the Sampler they only bite in one handoff mode.

The head of the node in `High + Low`. Every stage parameter appears twice — the plain name drives stage H, the `_low` twin drives stage L.

2 · Power Upscale — the controls

Control	What it does
`Mode`	The pill. `High + Low` turns on the second stage; every `_low` control below belongs to it.
`upscale_by` · `upscale_by_low`	How much each stage enlarges before it refines. Both at `1.00` means the stage refines at the size it was given.
`final_upscale_by`	A last plain resize **after** the refining is done. This is where a modest overall enlargement is cheapest — no tile pays for it.
`denoise` · `denoise_low`	How far each stage is allowed to reinvent. Low values (0.15–0.30) sharpen and add texture; high values redraw. This is the dial that decides whether the result still shows **your** picture.
`steps` · `steps_low`	Steps per stage. They multiply with the tile count, so a small number here is a large number of tile-steps.
`sampler_low` · `scheduler_low`	Stage L's own algorithm and schedule. Default `same as high`. Ancestral and SDE samplers (`*_a` , `*_sde`) inject fresh noise every step — at refine strengths that changes the grain.
`tile_size` · `tile_overlap`	The tiling itself. Larger tiles mean fewer seams and more VRAM; the overlap is the band in which neighbours are blended. The blend weights are proved to sum to exactly 1, so no seam is brighter or darker than its surroundings.
`pixel_stage`	Where the upscale model does its work in the chain.
`vae_tiling`	Tiles the VAE too, for when decoding is what runs out of memory.
`per_batch`	Frames per chunk in the pixel stage — the `9 chunks` you see in the process view come from this.

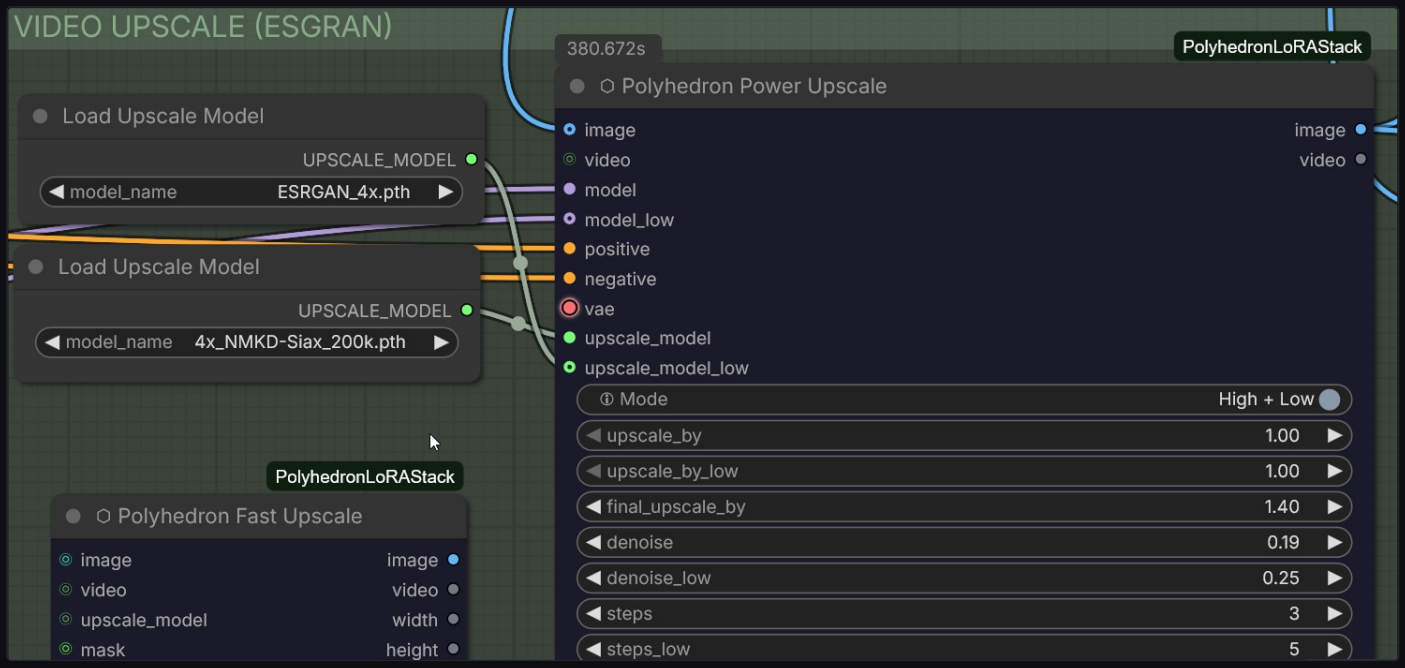

One upscale model per stage. Here a general ESRGAN drives stage H and a different model drives stage L — two ordinary core loaders, nothing bespoke.

3 · Power Upscale — watching it work

A tiled two-stage upscale of a clip is a long job. The process view exists so that a long job never looks like a hung one: it names the stage, counts the work, and gives a running estimate.

Reading the header line

Letter	Stage	What it counts
`H`	high	`Tile n/m` and `Step n/m` — the first refine, tile by tile.
`L`	low	The same counters for the second refine, with its own step count.
`P`	pixel	`Chunk n/m` and `Frame n/m` — the pixel stage, working through the clip in chunks.

After the counters comes the **elapsed** time and then the estimate. The estimate is deliberately marked `ETA ~` : it is measured from what has actually run so far, so it moves as the job goes on — and it moves most when the stage changes, because a tile-step and a frame are not the same unit of work.

The panel on the right is the **map**. It shows what the current stage is divided into — `1 Tile` while a stage refines a frame that fits in one tile, `9 chunks` once the pixel stage is working through the clip — and fills in as the work lands.

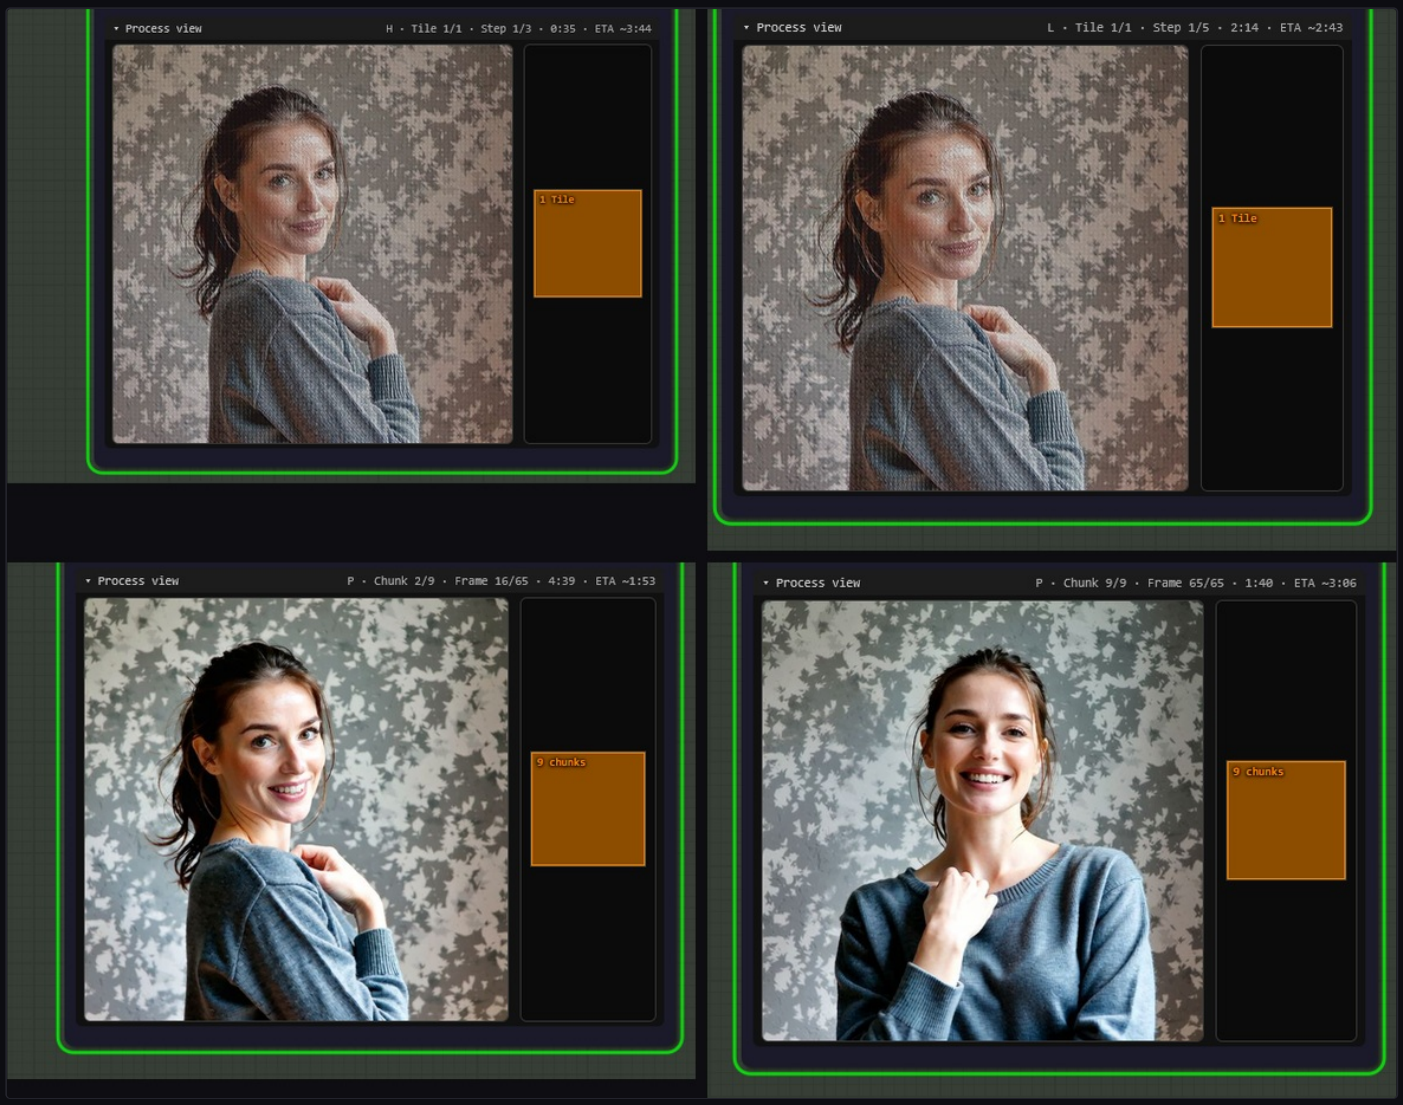

One run, four moments: stage H at step 1 of 3, stage L at step 1 of 5, then the pixel stage at chunk 2 and at chunk 9 of 9. The estimate falls from ~3:44 to ~0:00 and the map switches from tiles to chunks.

> **Two previews, two jobs.** `process_preview` is what you see *during* the run — it can be a fast approximation or a real VAE decode, and a sharper preview costs real time on every update. `result_preview` is the finished picture that stays in the node afterwards, with a frame slider for clips.

4 · Interpolate — the frames in between

Frame interpolation invents the frames that were never shot. Use it to raise a clip's rate, or to smooth motion at the same rate. It is the cheapest way to make a generated clip look less like a slideshow.

Pin	Direction	Carries
`frames`	in	The source frames.
`video`	in	A video object instead of loose frames.
`frames`	out	The interpolated sequence.
`frame_count` · `fps`	out	What actually came out — wire `fps` straight into a save node so the file is written at the rate it was built for.
`interp_info`	out	A short text record of what was done.

The controls

Control	What it does
`ckpt_name`	The RIFE checkpoint. The field shows the file's **size** beside its name, and a missing checkpoint is fetched on first use.
`rate_mode`	`multiplier` doubles or quadruples the frame count; the fps mode works out the ratio from `source_fps` and `target_fps` instead.
`precision`	`float32` is safe everywhere; half precision is faster where the card supports it.
`ensemble`	Runs the estimate both ways and averages. Steadier, and slower.
`fast_mode`	The quicker path through the network.
`scale_factor`	The resolution the motion estimate runs at. Lower it for very large frames or very fast motion.
`static_skip`	Leaves near-identical frames alone instead of spending work inventing a frame between two that barely differ.
`cut_guard`	Stops the interpolator from inventing a smooth transition **across a hard cut**. Above the threshold the pair is treated as a cut and the frame is duplicated rather than blended. This is the artefact that gives machine interpolation away fastest. Fast camera motion can reach 0.1 per frame; with a Cine Timeline's `cuts` wired the threshold is off and only the asked cuts are held.

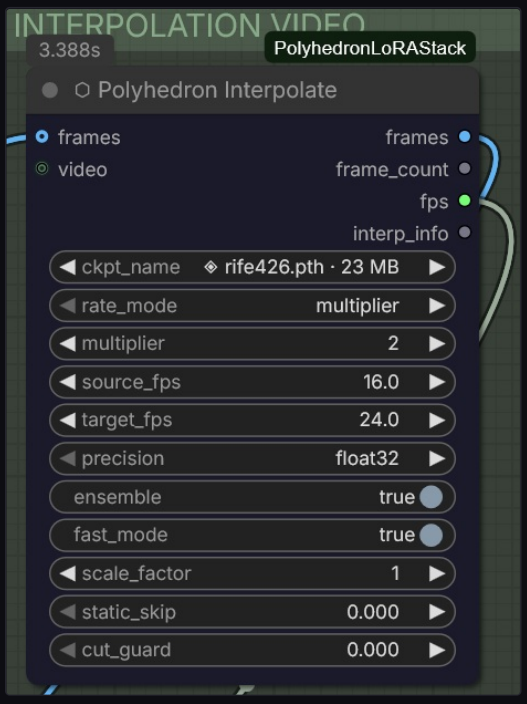

Interpolate at 2×, with both fps fields filled in so the mode can be switched without re-entering them.

5 · Choosing between them

You want	Reach for	Why
Bigger, same picture	**Fast Upscale**	Seconds, not minutes, and nothing is invented. The right answer far more often than it gets used.
Bigger *and* more detail	**Power Upscale**	It re-samples. Expect real time, and check that the result is still your picture.
Smoother motion	**Interpolate**	Frame count, not frame size. It does nothing for sharpness.
A mask that survives	**Fast Upscale**	The only one of the three that scales a mask with the image by the same rule.

An order that works

Refine first, enlarge last, interpolate at the very end. Power Upscale on the frames you actually want to keep; `final_upscale_by` or a Fast Upscale for the last plain enlargement, because no tile pays for it; and Interpolate last, so the invented frames are made from finished ones rather than being refined and enlarged themselves.

Two habits worth having

Watch the first tile, not the clock. In Power Upscale the first `H` tile tells you almost everything: if the tile already looks wrong at step 1, the remaining fifty tiles will not rescue it. Stop, lower `denoise`, start again.

Let the fps pin do the arithmetic. Interpolate's `fps` output is the rate the sequence was actually built at. Wired into the save node it cannot drift; typed in by hand it eventually will.

> **On the interpolation engine.** The network inside Interpolate is not ours. It is the MIT-licensed IFNet from Practical-RIFE, by way of ComfyUI-Frame-Interpolation, carried verbatim and deliberately unmodified — that way a result can be compared against a reference run and the comparison means something. Everything this pack corrects about frame interpolation lives outside the engine. The attribution travels with the code, in `nodes/vfi/NOTICE.md`.

6 · Added since — refine order, restore, a wired curve, cuts

Applies to: All models · the joint refine: MiniMax H3

refine_order — where the model pass sits

refine_order	What runs
`after pixel`	The default: the pixel model (ESRGAN) and the fit first, then the model refine on that canvas.
`before pixel`	The refine first, then the pixel model *behind* the last decode, where its detail reaches the file untouched. On a video+audio model the refine runs at the input size — also the light option for weak cards.
`off`	No model pass: ESRGAN and the fit deliver the canvas.

Measured law behind it: a pixel model placed *in front of* a VAE round trip is nearly free of effect — the VAE's compression erases most of its detail.

Video and sound together

On a joint model such as MiniMax H3 the refine runs over the whole clip at once, picture and sound, instead of tile by tile; the result viewer names what the run did in one line (“Joint refine …: N steps from σ …”).

A curve on sigmas

With the Sigma List wired, steps and scheduler are hidden; denoise names the steps it buys.

With a curve wired, the node reads neither `steps` nor `scheduler` : the refine starts at σ = `denoise` and runs every curve point below it. The two dials hide, and `denoise` shows the count: on the H3 HyperFlow curve 0.25 buys 1 step, 0.5 buys 2, 0.7 buys 3. More steps here also means more noise at the start, so more change.

Restore — a cleaning pass of its own

`restore_model` runs a restoration model over the frames as a stage of its own: one step, conditioned on the picture itself, no prompt. The node loads it with its family's own VAE; both are offered by the download on the node's line (SeedVR2 3B int8 for a 16 GB card, 3B fp16, 7B sharp int8 and the SeedVR2 VAE, from Comfy-Org's repack). `off` = no restore, the default.

Dial	What it does
`restore_order`	**after refine**: the restore polishes the finished frames; **before refine**: it cleans them first and the refine works on the clean picture.
`restore_color`	How the restored frames are colour-matched back: **lab** (most faithful), wavelet, adain, none.
`restore_frames`	Frames per temporal chunk; 0 = auto from the free memory, else 4n+1.
`restore_overlap`	Latent frames shared and crossfaded between chunks (1 = 4 picture frames).

A restore cannot invent structure the frames lack — the refine can; the restore cleans and sharpens what is there. The four dials show only while a restore model is picked.

pixel_speed

How the pixel upscale model is run — same weights, same picture: **off** (fp16, eager), **channels_last**, or **compile** (torch.compile, needs Triton; the first call pays the compile). The summary line prints ms/frame: compare, then keep the faster one.

Interpolate — holding the cuts

MODEL NOTES

MiniMax H3	● Fox templates: Universal Neutral, `before pixel`, denoise 0.5 (2 steps on the curve). Part IX, chapter 1 has the measurements.
Restore	○ Offered for every model; not in the fox templates (the trial runs did not convince).
WAN 2.x	○ Tile path, as described in chapters 2 and 3.

Part VI — Attention & grading

Polyhedron Suite · User Documentation

> Four nodes that sit **around** the sampler rather than inside it. **Attention** changes the machinery the model computes with — and can change it differently for the opening and closing steps. **NAG** puts guidance back into runs where CFG has been turned down or off. **Filter** grades the picture with a preview that is the grade itself, not an approximation of it. **Audio Stretch** retimes a soundtrack so a slowed clip keeps its sound in step. The first two change how the image is made; the last two change what it looks and sounds like afterwards.

1 · Attention — the machinery underneath
2 · Attention — choosing a backend
3 · NAG — guidance without CFG
4 · Filter — grading you can see
5 · Audio Stretch — sound that follows the picture

1 · Attention — the machinery underneath

Every diffusion model spends most of its time in attention. Which implementation does that arithmetic is a choice, and it is the single biggest lever on speed that does not touch step count or resolution.

The node takes a model and hands back a patched one. Nothing else in the graph changes — no rewiring, no different sampler. What changes is the kernel the model calls when it computes attention.

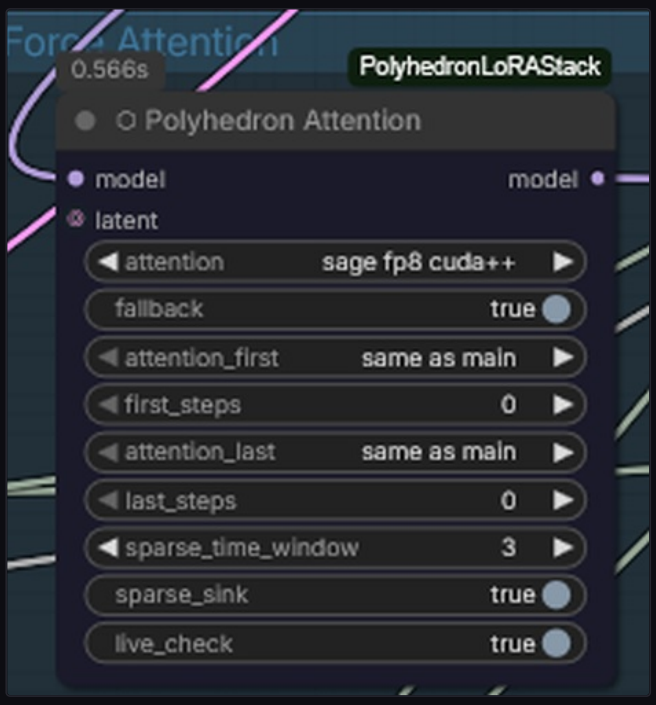

The node in a graph. The `latent` *input is optional and only the sparse mode needs it.*

Widget	What it does
`attention`	The backend for the whole run.
`fallback`	What to do when a kernel refuses a particular call — a cross-attention shape it does not implement, or a masked call. On, the call goes to the model's own backend and the run continues.
`attention_first` `first_steps`	A different backend for the first *n* steps, where composition is decided. `same as main` switches the split off.
`attention_last` `last_steps`	The same for the closing steps, where fine detail lands.
`sparse_time_window` `sparse_sink`	Parameters of the reserved sparse mode (see the note in the next section). They do nothing under any other backend.
`live_check`	Probe the chosen kernel before the run rather than failing inside it. Costs a fraction of a second and turns a crash 40 minutes in into a message before anything starts.

> **Why the split exists.** The fast quantised kernels are not lossless on every model. Running the exact backend for the first and last few steps and the fast one in between is usually indistinguishable from full precision, and still buys most of the time — because the middle steps are where the bulk of the work sits. If you see artefacts with a quantised backend, this is the dial to reach for before you abandon it.

A call the chosen kernel cannot serve — cross-attention, a masked call, grouped heads, an unfamiliar sequence length — is handed straight back to the model's own implementation. That is not an error and it is not warned about; it is simply not this node's call to make.

2 · Attention — choosing a backend

The list shows what is installed **and loadable on this machine**. A mode whose wheel imports but cannot actually run at scale is not offered, because an option you can pick and then watch fail is worse than one that was never there.

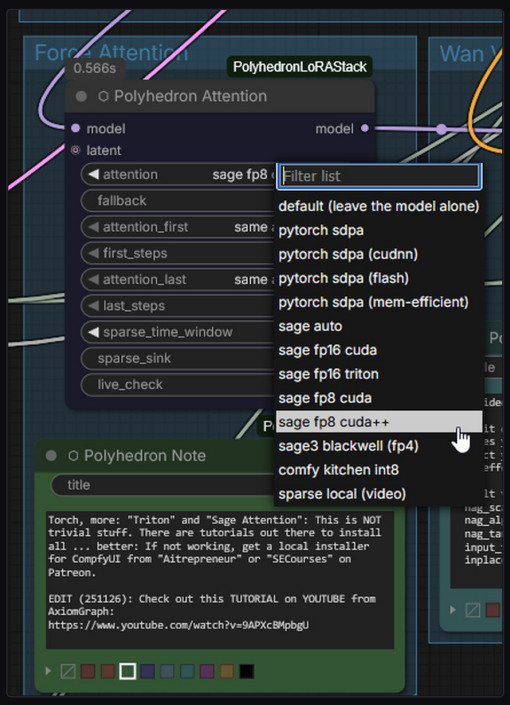

The list on a machine with the SageAttention family installed. On a machine without them, those rows are simply absent.

Mode	What it is
`default`	Leave the model alone. The honest baseline — use it for any A/B comparison.
`pytorch sdpa` (+ cudnn / flash / mem-efficient)	Torch's own scaled dot-product attention, either letting torch pick or pinning one implementation. Always available, always exact.
`sage auto`	SageAttention picks its own kernel for the hardware.
`sage fp16 triton` `sage fp16 cuda`	Half precision, two routes to it.
`sage fp8 cuda` `sage fp8 cuda++`	Eight-bit. Fastest of the widely available options; the `++` variant refines the accumulation.
`sage3 blackwell (fp4)`	Four-bit, Blackwell only, and only with the matching wheel.
`comfy kitchen int8`	ComfyUI's own int8 kernel where the build ships it.
`sparse local (video)`	Reserved. Offered only when the machinery behind it can be verified; see the note.

> **On the sparse mode.** Cutting attention's temporal reach is the published route to real speed-ups on video. The implementations worth having are also intricate, and a subtly wrong mask does not crash — it quietly degrades the video, which is the worst way for anything to fail. The mode therefore stays parked unless it can be proven correct on the machine it will run on. If you pick it where it is unavailable, the node says so and stops rather than guessing.

MODEL NOTES

MiniMax H3	● The fox templates run `sage fp8 cuda++` with fallback on.
Others	○ As described.

3 · NAG — guidance without CFG

Classifier-free guidance needs two predictions per step, so accelerated and distilled models turn it down or off — and with it goes the negative prompt. Normalized Attention Guidance puts the negative back where CFG cannot: inside attention.

Model in, model out; the negative text goes to `conditioning`.

Widget	What it does
`nag_scale`	The direction of the guidance rather than a strength dial. Useful values start well above 1.
`nag_alpha`	How much of the guided result is blended back in — this is the strength.
`nag_tau`	The safety cap: how far any single token may deviate. It keeps one runaway token from dragging the frame with it.
`start_percent` `end_percent`	The slice of the run it applies to.

It sits where any model patch sits: after the LoRAs, before the sampler. Set `nag_scale` to 0 and it does nothing, which makes an A/B on the same seed a one-widget change.

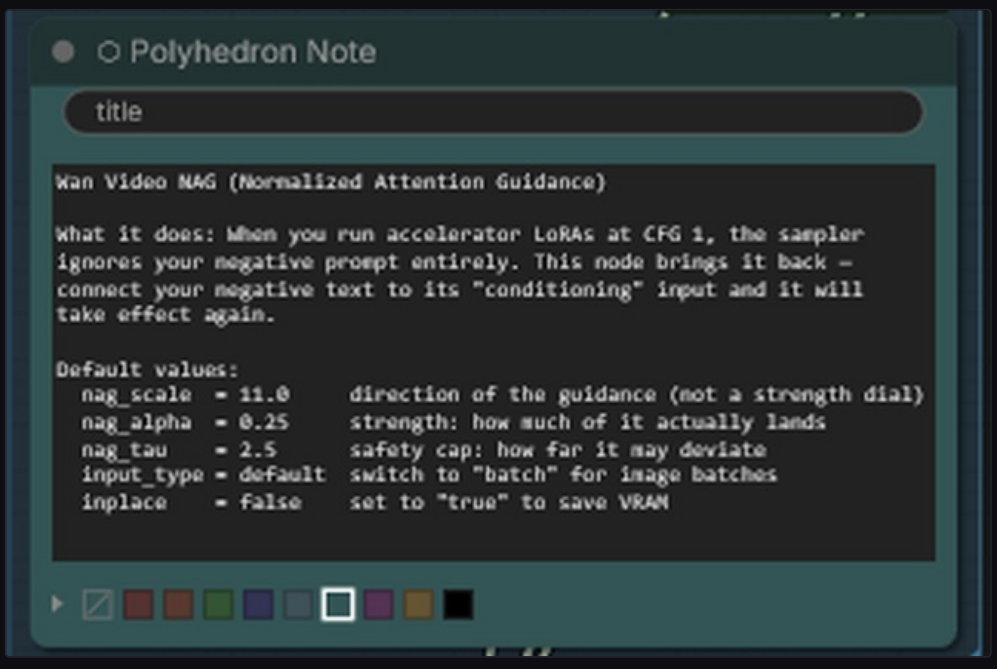

A Polyhedron Note carrying the settings next to the node it documents — notes belong to the graph and cost nothing at run time.

MODEL NOTES

MiniMax H3	● Not used in the H3 templates (removed in the public template since 3.82).
WAN 2.x	○ Puts guidance back where CFG is off, e.g. with Lightning LoRAs.

4 · Filter — grading you can see

The preview is not an approximation of the grade. The browser applies the **same** `.cube` file the backend will, read through the pack's own route, so what you set is what you render.

Exposure through sharpening, a LUT with its own strength, and the preset row underneath. The A/B button swaps to the ungraded original.

Group	Controls
Light	`exposure` , `contrast` , `gamma` , `highlights` , `shadows`
Colour	`temperature` , `tint` , `saturation` , `vibrance` , `hue_shift`
Detail	`sharpen_amount` , `sharpen_radius`
LUT	`lut_name` from the pack's `luts/` folder, with `lut_strength` to blend it in
Presets	Save the current look, load it back, delete it. Files live in the pack's `presets/` folder.

> **The one node here that opens server routes.** Three of them, in their own module, because the preview genuinely needs to read the LUT file. Both folders are fixed and derived from the pack's own location, and the caller supplies nothing but a bare filename — nothing outside the pack is reachable. Presets pass through one whitelist in both directions, so a hand-edited or downloaded file cannot push unknown keys into the node.

5 · Audio Stretch — sound that follows the picture

Interpolate a clip to twice the frame rate and the pictures last the same time; slow it down and they do not. The soundtrack has to be told either way.

The node retimes audio to a target it measures rather than one you assert. It shares its machinery with the Interpolate node's `audio_mode` — one implementation reached two ways, so the free-standing node and the built-in path can never drift apart.

Reach it via	When
Interpolate → `audio_mode`	The ordinary case: the clip is being retimed and its sound should follow. `keep` passes the original through, `stretch` retimes it.
Audio Stretch, free-standing	When the audio comes from somewhere else, or when the retime happens outside the interpolation chain.

> **Why not simply resample.** Playing a recording slower lowers its pitch, which is fine for an engine note and ruinous for a voice. The stretch changes the tempo without moving the pitch, so speech survives it.

> **The number that actually matters** is `source_fps` on the Interpolate node. A soundtrack that drifts is almost always a wrong rate there rather than a fault in the retime: interpolation places source frame *k* at output index *k*×multiplier, so at the matching output rate every original second stays where it was. What is left is a tail a fraction of a frame long — milliseconds. Anyone seeing more than that should check the frame rate before anything else.

Part VII — Cine Timeline

Polyhedron Suite · User Documentation · MiniMax H3

> One node that holds a whole short film: the shots on a time axis, the prompt they make, and — once rendered — the clips, laid out as tracks you can cut, heal, slow down and export. It writes MiniMax H3's official prompt form, so H3 is the model it is built for. A film can be one clip or several scenes, and a scene can carry on from the one before it, picture and sound. Five ready templates show every way in: text only, reference pictures, keyframes, and a film in two clips — with or without references.

1 · Overview — one node, one film
2 · The form — mode, length, project, what a run renders
3 · Shots and the prompt
4 · Scenes and carry — a film in several clips
5 · Tracks — the editing room
6 · Seams — editing a film of scenes
7 · Files and export
8 · Cuts and the Interpolate

1 · Overview — one node, one film

Applies to: MiniMax H3

The upper half of the node is the script: mode, length, the shots and the sound. The lower half is the editing room: every rendered clip of the project as a track, with its frames and its waveform, and a monitor that plays them.

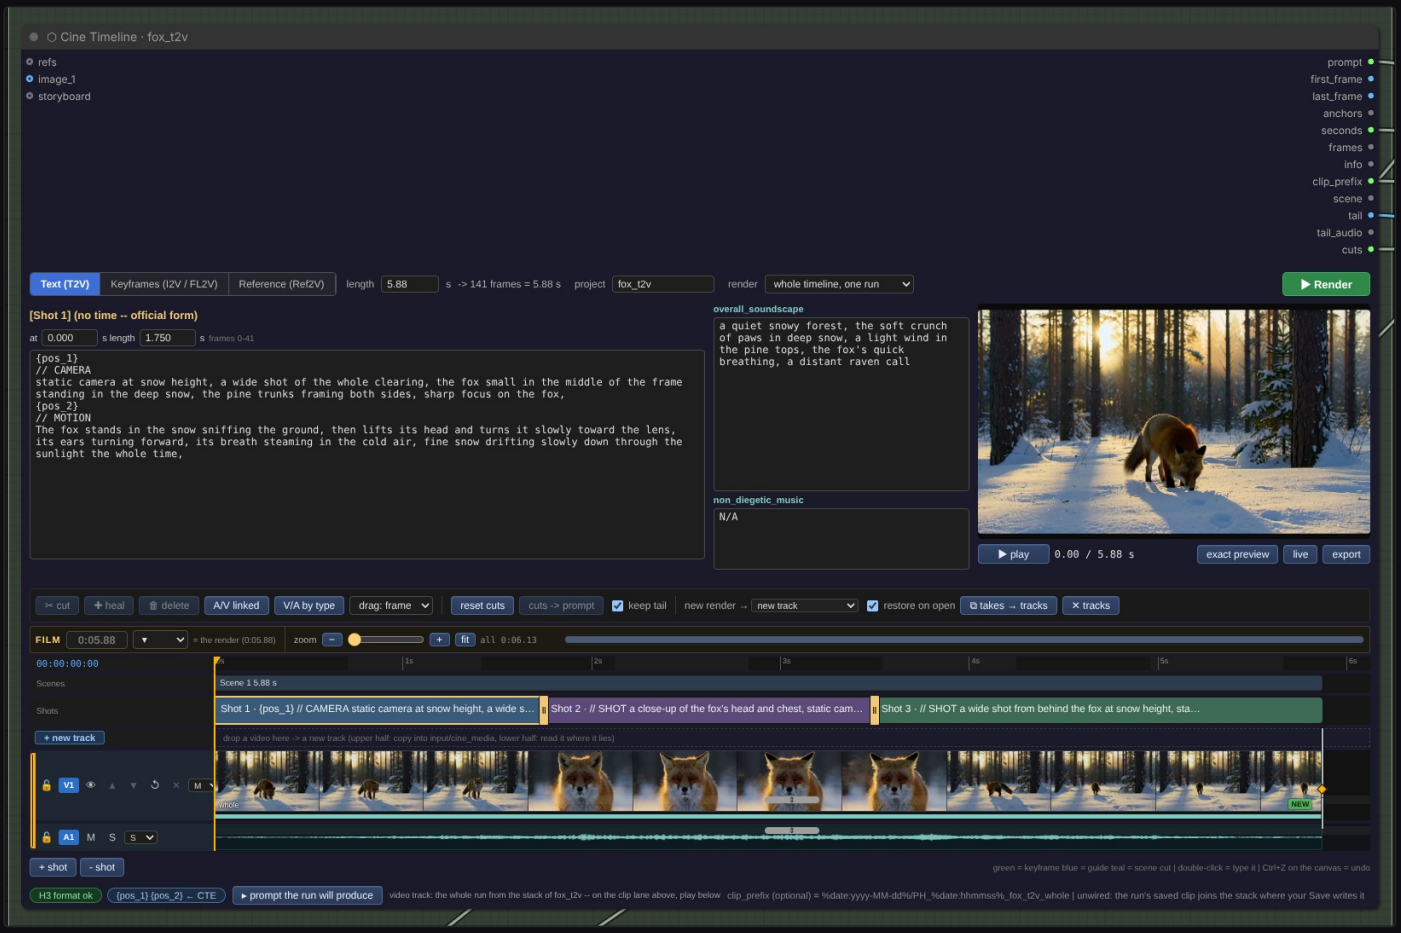

The fox template after a run: the form, Shot 1 open, the monitor paused on the close-up, three shots on the shot lane and the render on V1/A1.

Pins

Pin	Dir.	Carries
`refs`	in	Pictures by `@tag` from a Reference Board (Reference mode).
`image_1` ... `image_9`	in	Anchor pictures; the next pin appears as soon as one is wired.
`storyboard`	in	Optional storyboard text; taken over once, then edited freely.
`prompt`	out	The finished H3 prompt → CLIP Text Encode (chapter 3).
`first_frame` / `last_frame` / `anchors`	out	Keyframes and guides of the run (chapter 4).
`seconds` / `frames`	out	The clip's length on H3's grid → Empty Latent.
`info`	out	What the run renders, shot by shot, and every check.
`clip_prefix`	out	The file name for the Save (chapter 6).
`scene`	out	Which scene this run renders (0 = the whole timeline).
`tail` / `tail_audio`	out	The end of the scene before, for a scene that continues it (chapter 4).
`cuts`	out	Where the shots change → Interpolate (chapter 8).

MODEL NOTES

MiniMax H3	● The node writes H3's official form and its 17k+5 frame grid at 24 fps. The five fox templates are complete H3 graphs.
Other models	Not supported: another video model reads another prompt form. The track editor (chapter 5) cuts and exports any clip that lands in the project.

2 · The form — mode, length, project, what a run renders

Applies to: MiniMax H3

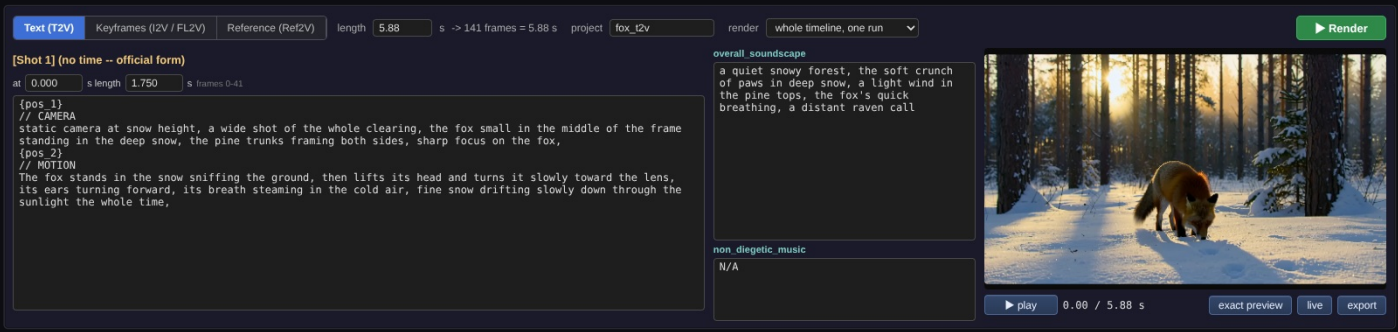

The form row and the open shot: mode, length, project, render choice; the shot's text on the left, the sound fields in the middle, the monitor on the right.

Mode

Mode	What enters	H3 model
Text (T2V)	The prompt only.	fl2va
Keyframes (I2V / FL2V)	Pictures on the first and/or last frame; pictures in between become guides.	fl2va
Reference (Ref2V)	Pictures by `@tag` that define subject and place, not frames.	ref2va

Length

Type seconds; the node shows what H3 will really render. H3 works on a grid of 17k+5 frames at 24 fps, so 5.88 s becomes 141 frames = 5.875 s. A clip is 4 s at least and 15 s at most. The `seconds` output carries the snapped length to the Empty Latent, so the two can never disagree.

Project and render

The **project** names the film: its clips, its stack list and its export carry the name. **render** decides what the next run makes:

render	One Run renders
whole timeline, one run	All shots in one clip. The fox templates T2V, REFS and KEYFRAMES.
one scene	The active scene only.
all scenes, one run each	One run per scene, queued by one press — the CONTINUE template.

Render queues the run from the node. With scenes, **render all scenes** (or **render ticked scenes**) queues the ticked ones in order.

Sound

`overall_soundscape` describes what the scene sounds like; `non_diegetic_music` is music from outside the scene. Leave it at `N/A` unless you want music — an empty field invites H3 to add some.

MODEL NOTES

MiniMax H3	● fl2va for Text and Keyframes, ref2va for Reference: the template's Load Model switch picks the file (select 2 / select 3).

The two picture modes

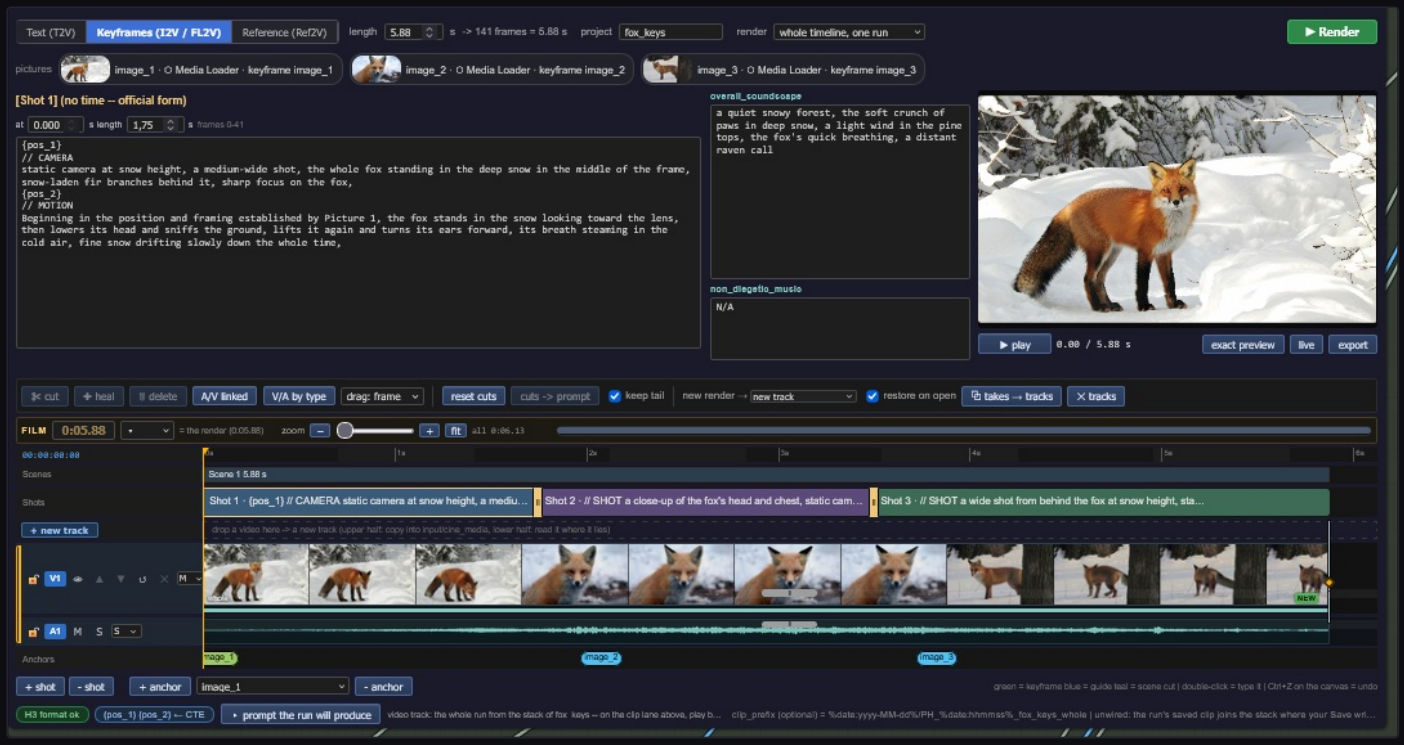

Keyframes *(the KEYFRAMES template): the pictures row names the three Media Loaders; on the Anchors lane* `image_1` *sits on the first frame,* `image_2` *and* `image_3` *are guides later in the clip (**+ anchor** / **- anchor** below the lanes).*

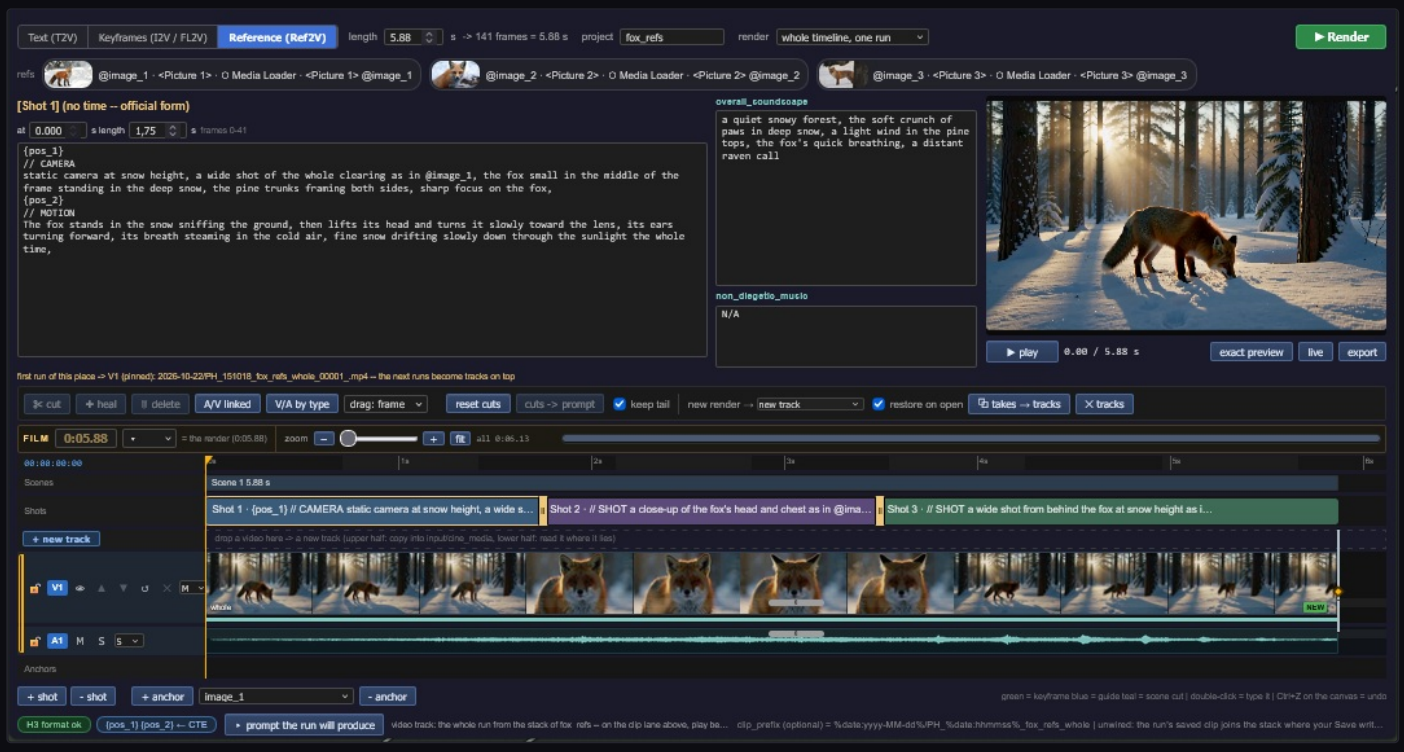

Reference *(the REFS template): the refs row lists the three pictures with their* `@image` *tags and their loaders; the shots name them in the text (as in @image_1). They define subject and place, not frames.*

Reference photos (Wikimedia Commons): "Vulpes vulpes ssp fulvus 26568101" by Joanne Redwood (CC0); "Vulpes Vulpes, Island Beach State Park, NJ 04" by peggycadigan (CC BY 2.0); "Vulpes vulpes (32846612491)" by xulescu_g (CC BY-SA 2.0). Details in `docs/third_party/fox_reference_photos.md` *.*

> **First → last frame: motion, not a dissolve.** The model paints the way between the two keyframes well only when they share camera, light and background — make the last picture *from* the first. Describe the **way**, not the pictures (first state → what visibly changes → last state), in **one shot**; the timeline's `info` repeats this rule for every run with both keyframes and warns when an anchor sits in the last quarter second (a guide, not the last frame). A pose video and the Transition Check: Part X, chapters 5 and 6.

3 · Shots and the prompt

Applies to: MiniMax H3

Every shot has a start (`at`), a length, a cut phrase and a text. The text is written in `//` rubrics, exactly like the CLIP Text Encode (Part III, chapter 3): the rubric lines are headings for you, the encoder never sees them.

The fixed parts live in the encoder

Triggers, look, scene, light, subject and mood are the same in every shot. They sit in the CLIP Text Encode's segments; the timeline only writes `{pos_1}` and `{pos_2}` where they belong and adds what changes per shot — camera and motion. Wire the timeline's `prompt` into the encoder's `pos_external` with `external_mode = fill {pos_N}` . The button **{pos_1} {pos_2} ← CTE** moves the fixed parts of Shot 1 into the segments for you.

The prompt, exactly

The timeline writes H3's official form: `[Shot 1]` , then `[Shot N] At MM:SS.mmm, the camera cuts to …` , then the soundscape and the music. **prompt the run will produce** opens the text the encoder will receive, byte for byte, with the shot times underneath. The chip **H3 format ok** confirms the form.

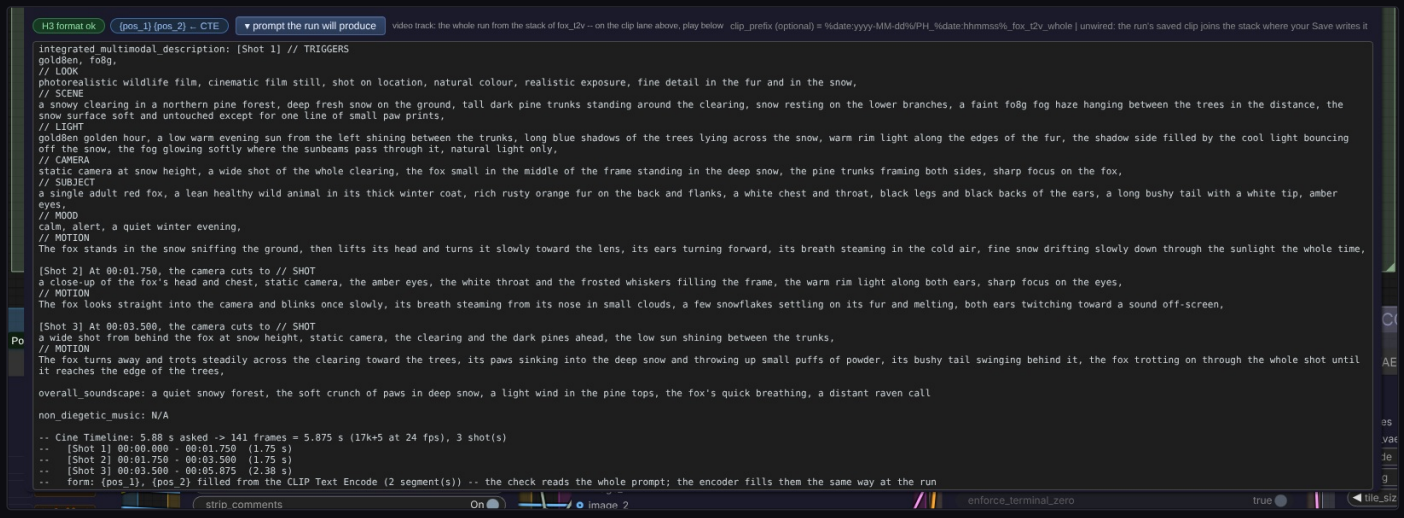

The fox's prompt as the run produces it: the encoder's fixed parts filled in, three shots with their times, sound, and the timing check.

MODEL NOTES

MiniMax H3	● H3 keeps a shot's text and paints the cut close to its time, not on the exact frame (chapter 8).

4 · Scenes and carry — a film in several clips

Applies to: MiniMax H3

A clip is 15 s at most. A longer film is split into **scenes**: each scene is its own clip and its own run. Tick **starts a new scene** on the shot that opens it.

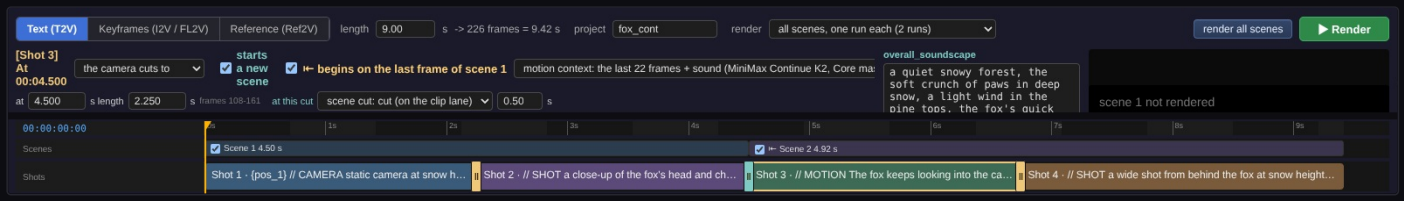

The CONTINUE template: Shot 3 starts scene 2 and begins on the last frame of scene 1, in motion mode. The Scenes row shows both scenes, ticked.

Carry — a scene that continues the one before

Tick **begins on the last frame of scene k**, and the scene starts where the newest clip of the scene before ended. How that ending is used is set once for the whole timeline:

carry mode	What scene k gets	Path
pin	The last frame, pinned at frame 0. The prompt stays as it is.	MiniMax Reference `first_frame` (ref2va)
keyframe	The last frame as its first keyframe: the official alignment line goes into the prompt.	MiniMax Keyframes, `<Picture 1>` (fl2va)
motion	The last 5, 22 or 39 frames *and their sound*, held as the scene's head: motion and sound carry on.	`tail` / `tail_audio` → MiniMax Continue

In **motion** mode the scene is rendered longer by its head (22 frames = 0.92 s), and every later shot moves back by that much. The clip on disk keeps the head; the film leaves the repeated frames out.

> **Needs ComfyUI master.** MiniMax Continue uses Core's guide mechanics, which a release build may not have yet. The first scene has nothing to carry: Continue passes it through.

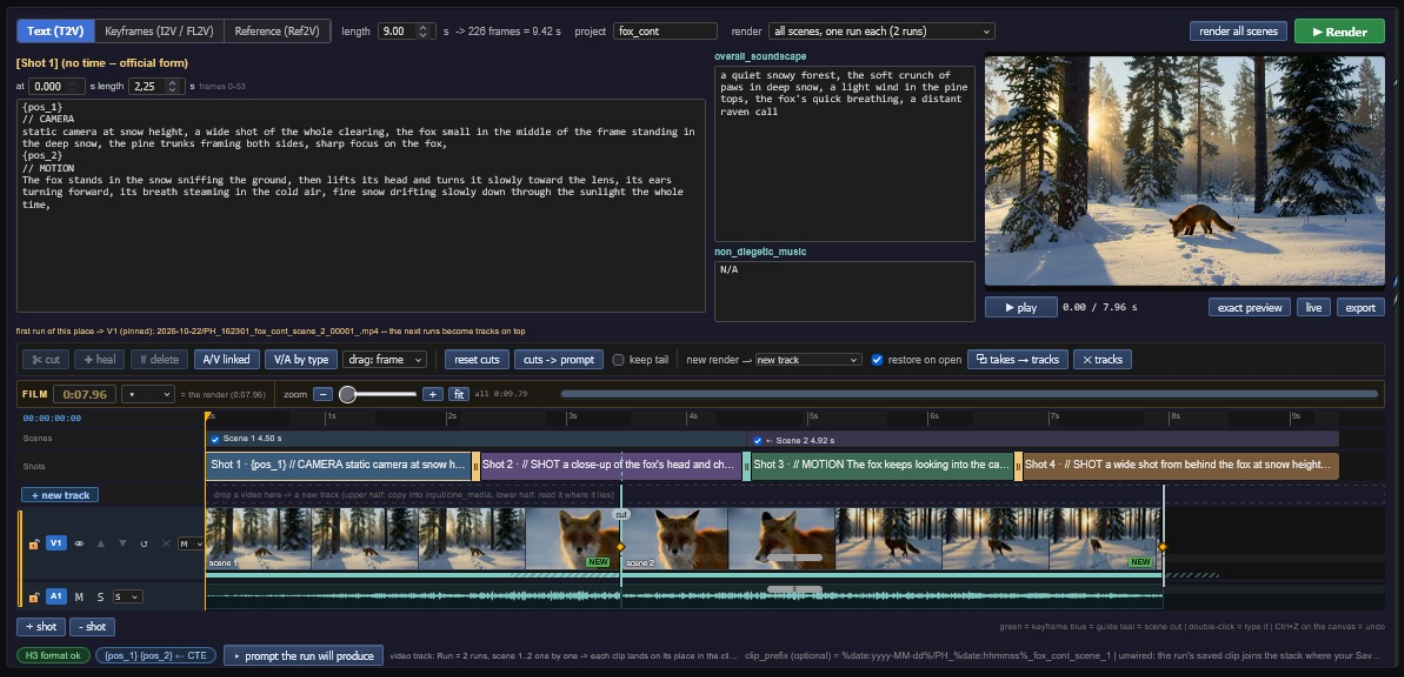

The CONTINUE template after both runs: scene 1 and scene 2 side by side on V1, the cut between them marked. Scene 2's repeated head is left out at the cut — in the export and in the live monitor alike.

Changes between shots

Inside one clip, H3 itself paints the change: a hard cut, or a transition it was asked for in words (blur to white, fade through black, cross-dissolve, or your own sentences). Between two scenes the change is made when the film is assembled (**at this cut**: cut, dissolve, fade).

5 · Tracks — the editing room

Applies to: every clip of the project

After a run its clip lands on the tracks — read from wherever the Save wrote it. Each track shows its real frames and its waveform.

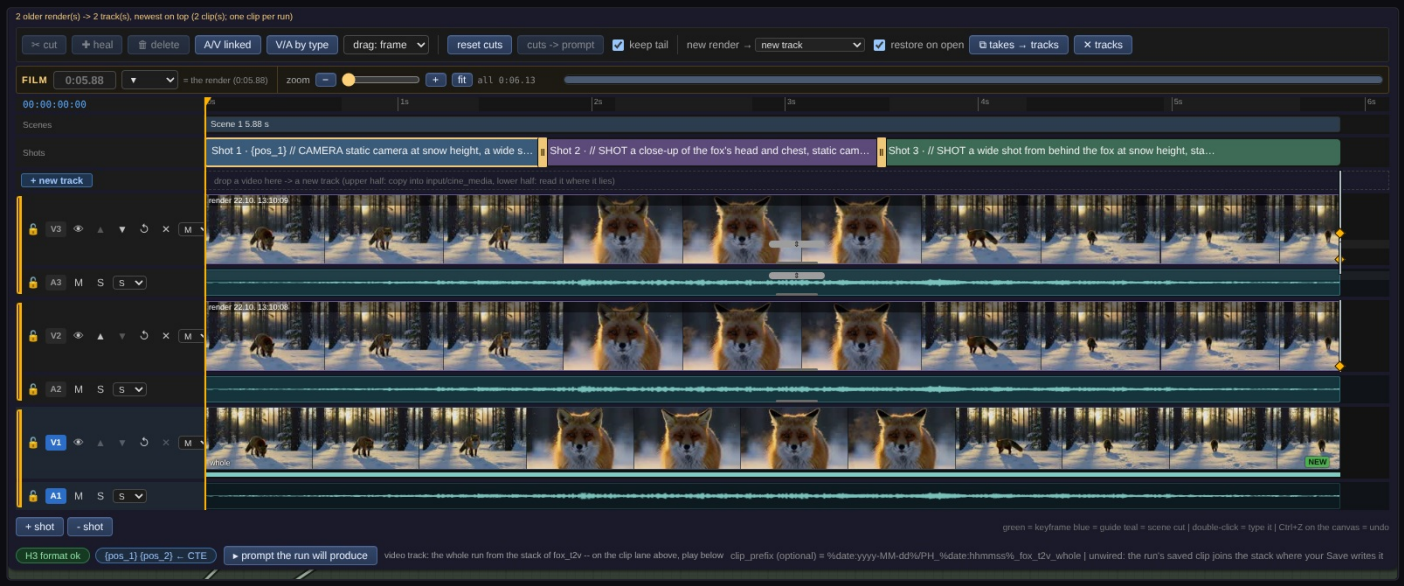

*Three renders of the fox, one track each, newest on top (**takes → tracks**).*

Where a new render goes

new render →	What happens
new track (default)	The first render lands on V1, every later one on a new track on top — a basin of takes to cut from. V1 keeps its clip.
replace	The new render takes the place of the old one on V1 (the old file stays on disk).

The newest render carries a green **NEW**. **takes → tracks** turns older renders into tracks too.

On a track

Action	What it does
click a piece	select it; **delete** empties it, the tracks below show through
cut / **heal**	split at the playhead / join a cut again (double-click the line)
drag a piece, a cut, the end	move it, trim the cut, play more or less of the clip; a cut inside a repeated head is held at its end, **Alt** places it there on purpose
the amber diamond	the piece's speed, picture and sound, pitch kept; double-click = 100 %
A/V linked	unlinked, the sound's cut moves alone (J- and L-cuts)
the track head	lock, show/hide, up/down, reset, ⇤ snap this track to the scenes, remove, height, mute, solo
snap to scenes	V1 and every track back on the scene boundaries (chapter 6)
V/A by type	pictures above and sounds below, instead of pairs

FILM sets the film's length (empty = the render's). The monitor takes the clip's shape; **Space** plays and pauses while the node is selected. Drop a video on the dashed row to open a track with it.

6 · Seams — editing a film of scenes

Applies to: films of several scenes · MiniMax H3

Scenes that continue each other share frames: in motion mode scene k repeats the end of scene k−1 as its head. The prompt's own cut list always leaves those frames out — and now an edited one does too.

What the cut list keeps out

You do	What happens
cut or trim into a repeated head	the cut is held at the head's end (the status line says so); hold **Alt** to place it inside on purpose
set a blend on a seam	it runs on the piece's own frames, never on head frames
render a new take of a scene	its pieces move by the change of the head (named in the plan)
change the number of scenes	the edited pieces fall back to the prompt's (named)

The **carry follows the cut**: where your cut ends scene k−1 is where scene k continues (also for `@clip:k:last`). The end is handed to the one run that reads it; a fine cut still never re-renders the graph. A scene that carries finds the clip before it also when the browser tab was in the background: it looks in today's and yesterday's output folder.

One picture for two clips — “both scenes”



*An anchor on the boundary between scene 1 and scene 2, ticked **both scenes**: the last frame of scene 1 and the first of scene 2.*

An anchor that sits **on** a scene boundary can be ticked **both scenes** in its row. Scene k−1 then ends on that picture and scene k starts on it — two clips that meet on one picture (A → B over a cut). Unticked it belongs to the scene after, as before. The pill shows the role in the scene that renders it: first, last, both or guide. Two anchors on one frame of a scene stop the run by name.

Snap to scenes

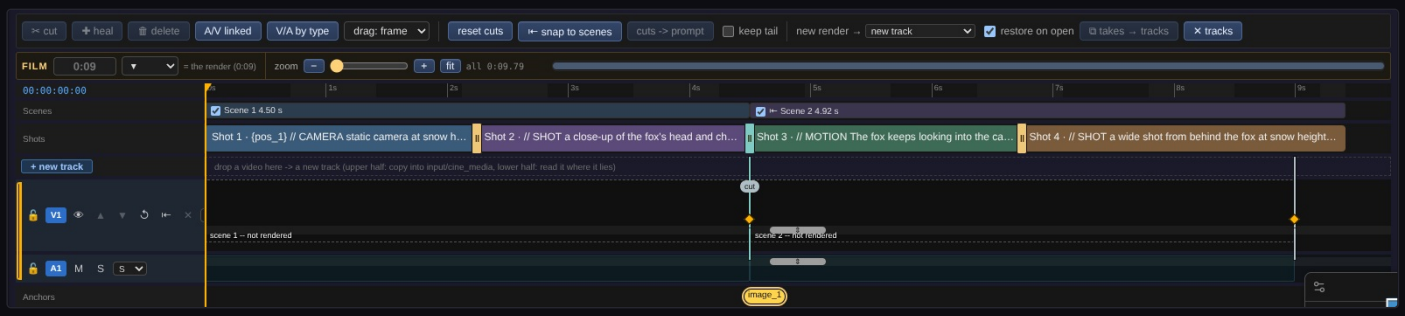

***snap to scenes** in the toolbar, the ⇤ arrow in the track head, the anchor on the boundary in yellow.*

Moved something by mistake? **snap to scenes** puts V1's cuts back where the prompt cuts, and every clip whose name says its scene (`_scene_<k>_`, `_whole_`) goes back to the start of its scene — its own repeated head measured on that file and left out. Clips without a scene number and locked tracks stay. The arrow in a track head does the same for that track only.

7 · Files and export

Applies to: every clip of the project

Wire `clip_prefix` into the Save's file name. A run then writes into the folder of the day, never into a project folder of its own:

What	Where
a whole-timeline run	`output/<date>/PH_<time>_<project>_whole_*.mp4`
a scene run	`output/<date>/PH_<time>_<project>_scene_k_*.mp4`
the project's list of clips	`input/cine_media/<project>/stack/`
an export	`output/<date>/PH_<time>_<project>_film`

Without the wire, the clip the run saves still joins the project's stack, wherever the Save writes it.

Playing and exporting

live plays the tracks directly. **exact preview** renders the film with ffmpeg and plays that render — what export will write. **export** writes the film.

> **Needs ffmpeg** (on the PATH, or the one `imageio-ffmpeg` brings) for film strips, waveforms and export; clips are read with PyAV.

The templates

Template	What it shows
T2V	Text only: three shots in 5.875 s, one run.
REFS	Three reference pictures through MiniMax Reference as `@image_1..3`.
KEYFRAMES	A first frame through MiniMax Keyframes, two guides through MiniMax Continue.
CONTINUE	Two scenes in one press; scene 2 continues scene 1 in motion mode.
CONTINUE REFS	The same two scenes with three reference pictures in both (ref2va).

All five share the same chain behind the sampler: Power Upscale (Universal Neutral, the refine before the pixel pass), Interpolate to 48 fps with the timeline's cuts, a light Filter sharpen (0.4), Save.

8 · Cuts and the Interpolate

Applies to: MiniMax H3 · the Interpolate works for all models

Interpolation invents the frames between two frames. Across a cut there is nothing in between: the result is a ghost — half wide shot, half close-up. The timeline knows where its cuts are, so it tells the Interpolate.

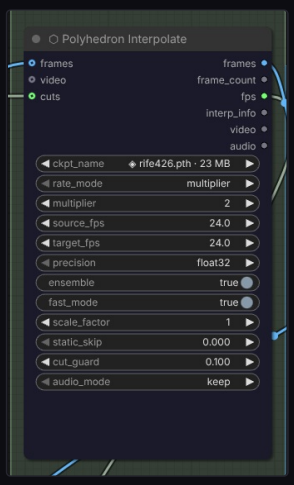

The Interpolate with the `cuts` pin wired from the timeline.

Why the cut is not on the frame

The prompt asks for a cut at a time; H3 paints it close to that time. The fox asked for 1.75 s and 3.50 s and got its cuts between frames 42|43 and 86|87 — the second one two frames late. So the Interpolate looks around each asked time (±0.25 s) for the one pair of frames where the picture really jumps, and holds it if it stands three times above its neighbours. Fast motion lifts the whole window and is left alone; a painted dissolve has no single jump and is interpolated as it should be.

Fox clip, measured	Pair difference
calm frames	about 0.001 – 0.01
the fastest motion	0.024
the two cuts	0.21

With the `cuts` pin wired, the `cut_guard` threshold is **off** — also when the shot has no cut. A fast camera move reaches 0.10–0.15 per frame (measured on a reef clip): the threshold held 56 of its 123 pairs, and the clip ran at 24 fps in the move and at 48 around it. Without a timeline, `cut_guard` holds every pair above 0.1 (0 = off). `interp_info` and the console say where each cut was found.

MODEL NOTES

MiniMax H3	● Fox T2V at 48 fps: both cuts held, no ghost frame.
MiniMax H3	● Reef one-shot at 48 fps with the pin: no held pair in the camera move, even rhythm.
WAN 2.x	○ No timeline: `cut_guard` 0.1 is the guard; lower it or set 0 for fast motion.
Others	○ As WAN.

Part VIII — Workflow essentials

Polyhedron Suite · User Documentation

> The small nodes the rest of the suite is wired **from**: loaders that show what they load, a seed you can see, one Empty Latent for every model family, switches, text on the canvas — and the two nodes that bring pictures, videos and sound into a MiniMax H3 run as references. None of them needs a model download of its own.

1 · Loaders and the VAE Codec
2 · Seed, Int and Empty Latent
3 · Switches, Media Info, Show Text, Note
4 · MiniMax Reference and Reference Board
5 · Sigma List

1 · Loaders and the VAE Codec

Applies to: All models

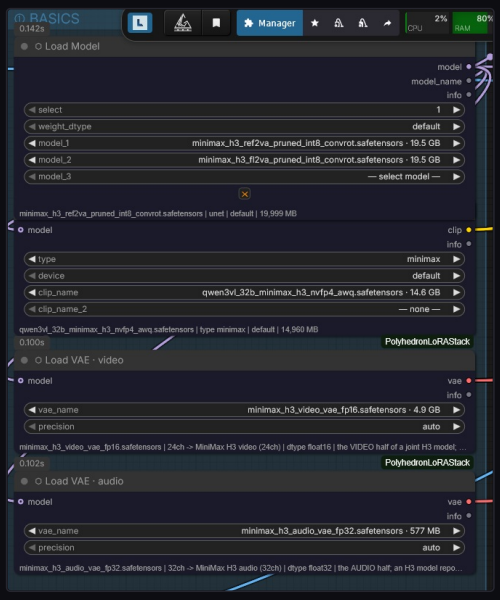

Load Model with three model slots and a select switch, Load CLIP, and the two halves of a joint VAE (video and audio) — an H3 graph.

Node	What it does
Load Model	Diffusion model loader with progressive slots: a second slot appears once the first is filled. `select` picks which slot runs, so one graph can switch between model files without rewiring. The footer names file, format and size.
Load CLIP	The same idea for text encoders, multi-encoder setups included; the footer names what it recognised.
Load VAE	VAE loader, sized; the footer names the VAE family it read from the file (channel count).
Load Upscale Model	ESRGAN-family loader with the same model card the Power Upscale shows.
VAE Codec	Encode and decode in one node; picture and sound when the VAE is joint.

VAE Codec in decode mode: one node, picture and audio out.

MODEL NOTES

MiniMax H3	● Two VAEs: video (24 channels) and audio (32 channels). The text encoder is Qwen3-VL 32B.
WAN 2.x	○ One VAE, UMT5 text encoder; two model files for the two experts of WAN 2.2.

2 · Seed, Int and Empty Latent

Applies to: All models

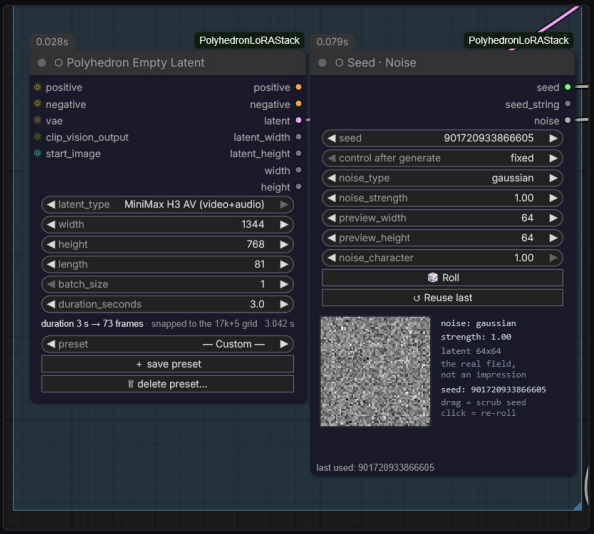

Empty Latent on MiniMax H3 AV, next to the Seed with its noise preview.

Seed

A seed with a live preview of the noise it makes. Drag on the preview to scrub through seeds, click to roll a new one; **Reuse last** brings back the seed of the last run. For comparisons keep `control after generate` on **fixed**: every variant then renders the same noise.

Int

An integer with presets — click, arrows, drag or keyboard.

Empty Latent

One node for every model family instead of one per family: pick `latent_type` and the node builds the right shape. Wire `duration_seconds` from the Cine Timeline's `seconds` and the length always matches the prompt.

latent_type	Family
MiniMax H3 AV (video+audio)	MiniMax H3 — picture and sound in one latent, 17k+5 frames at 24 fps
WAN video	WAN 2.1 / 2.2
Hunyuan video, Mochi video, LTXV video, Cosmos video	the other video families
SD/SDXL image, Flux2 image, Qwen-Image 2.1 image (64ch), Image	still images

MODEL NOTES

MiniMax H3	● MiniMax H3 AV, length on the 17k+5 grid (141 frames = 5.875 s).
WAN 2.x	○ WAN video, length on the 4k+1 grid at 16 fps.
Others	○ Built from the family's own shape rule; not field-tested.

3 · Switches, Media Info, Show Text, Note

Applies to: All models

Node	What it does
Switch	One input picked from several. The branches not picked are blocked, not run.
Switch Inverse	One input steered to one of several outputs. The fox templates use the pair to pick which video goes on — the run's new one or an older one from the Media Loader — and where it goes next.
Media Info	Reads the numbers out of whatever media passes through.
Show Text	Shows any text that reaches it — an `info` output, a resolved prompt — on the canvas, sized to its content.
Note	A coloured card that belongs to the graph: heading, body, a colour row with exactly the colours of ComfyUI's own menu. Never executed, costs nothing.

The fox templates explain themselves with Notes: what a switch position means, which file a loader expects, how the whole workflow runs. Group titles stay short; the explanation sits in a Note inside the group.

MODEL NOTES

All models	No difference.

4 · MiniMax Reference and Reference Board

Applies to: MiniMax H3 (ref2va)

H3's reference model takes up to nine pictures, three videos and three audios and lets the prompt name them. These two nodes put them in.

MiniMax Reference in the REFS template: three pictures, the prompt names them as `@image_1` … `@image_3`.

MiniMax Reference

Builds the conditioning a ref2va graph expects: pictures (`<Picture i>`), videos (`<Video k>` , with their sound) and audios (`<Audio j>`), each picture with its own megapixel budget. Name references in the prompt as `@fox` instead of numbers (the `tags` line: `fox = image_2`); the node writes the live `<Picture n>` in before encoding and stops the run, by name, on a tag it does not know. The optional `first_frame` pins frame 0 — the pin mode of a carried scene (Part VII). Pins grow with what is wired.

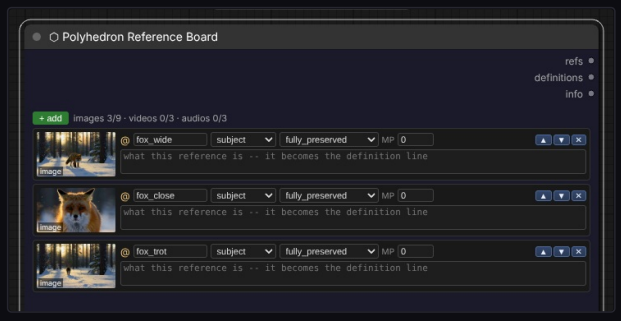

The Reference Board with three pictures: tag, role, retention and budget per card.

Reference Board

The same references as cards in one node instead of loose wires: tag, role, retention, budget. Its `refs` output fills MiniMax Reference's free slots and the Cine Timeline's `refs` ; `definitions` drafts the official subject and retention lines.

5 · Sigma List

Applies to: All models with a trained schedule

Some models are distilled for a fixed list of noise levels rather than a curve shape. The Sigma List holds such a list — from a preset or typed in — and draws the curve the run will use.

The preset `hyperflow_8step_h3_raw` : 8 steps, shifted with 12, drawn from 1.000 to 0.

A preset carries the whole recipe — list, shift, terminal zero — and greys the fields it sets. **custom** frees them: type the list (commas, spaces or new lines), the `shift` , and whether the list must end on zero. The drawing comes from the same code as the run, so a typo shows as the run's own refusal, in the node, before the run.

What a wired curve changes downstream

A sampler or a Power Upscale with a curve on its `sigmas` pin no longer reads `steps` and `scheduler` : the curve is the schedule. The Power Upscale hides those dials and names the steps its `denoise` buys on the curve (Part V).

MODEL NOTES

MiniMax H3	● `hyperflow_8step_h3_raw` , shift 12, euler, cfg 1 — the fox templates.
WAN 2.x	○ Lightning grids exist as presets (shift 5); the WAN examples use the Sigma Curve / Dual Sigma Curve (Part II, chapter 13).

Part IX — Model profiles and recipes

Polyhedron Suite · User Documentation

> The suite's nodes are written for every model; the differences live here. A profile collects, for one model family, the six properties that change how the nodes behave — and the settings that follow from them. Two families are worked out in full: **MiniMax H3**, which the suite runs today, and **WAN 2.2**, for which Parts II and IV were first written. The others are listed with what the code supports.

1 · MiniMax H3

2 · WAN 2.2

3 · Other families

4 · Recipes

1 · MiniMax H3

Profile · worked out

Property	MiniMax H3	What follows in the suite
Guidance	CFG-distilled, cfg 1	The negative prompt has no effect; NAG is not used; DARE and Resolve are switched off in the Stack (Part II, addendum).
Experts	one model	Sampler in **Single**; one LoRA Stack.
Streams	picture and sound in one latent (joint)	Empty Latent *MiniMax H3 AV*; video and audio VAE; the Interpolate and the Save carry the sound along.
Schedule	a trained grid	Sigma List `hyperflow_8step_h3_raw`, shift 12, euler, 8 steps; with a curve wired `steps` is not read.
Frame grid	17k+5 frames at 24 fps, 4–15 s per clip	Cine Timeline and Empty Latent snap to it; longer films are scenes.
Text encoder	Qwen3-VL 32B	Prompts in `//` rubrics through the CLIP Text Encode; the Token Counter's 512 budget is WAN's, not H3's.

Model files and modes

H3 model	For	Load Model select (fox templates)
fl2va	text, first / last frame, guides	2 — T2V, KEYFRAMES, CONTINUE
ref2va	reference pictures, videos, audios	1, or 3 for a ref2va merge — REFS uses 3

The chain after the sampler, as measured on the fox

Endclip, 48 fps	Sharp + Filter 0.7	Neutral + Filter 0.7	Neutral + 0.4 + cuts
sharpness (Laplace)	248	145	**115**
edge overshoot	25.5	19.4	**15.9**
flicker in the fine band	0.677	0.555	**0.519**
ghost frames at the cuts	2	2	**0**

Same raw clip in all three (fixed seed). The right-hand column is the setting of the five fox templates: Power Upscale with Universal Neutral and the refine before the pixel pass, Interpolate with the timeline's cuts, Filter sharpen 0.4.

STATUS

●	Field-tested on Frank's runs: the T2V and REFS templates, the upscale comparison above, the cut guard.
◐	Measured or proven in code: merge downgrade on joint models, the curve-step count.

2 · WAN 2.2

Profile · from the existing chapters · resting

The LoRA Stack, the sampler's High + Low mode and the sigma nodes were built for WAN 2.2. Those chapters stand as written; this page gathers what they assume.

Property	WAN 2.2	What follows in the suite
Guidance	CFG > 1 (Lightning LoRAs: cfg 1)	The negative prompt works; NAG puts guidance back where CFG is off; DARE and Resolve are calibrated for it.
Experts	two: high noise and low noise	Sampler **High + Low** with handoff; two Stacks, two Inspectors; Dual Sigma Curve; `sigma_shift` 8 (high) and `sigma_shift_low` 5.
Streams	picture only	Empty Latent *WAN video*; sound comes from elsewhere.
Schedule	scheduler + shift	Sigma Curve / Dual Sigma Curve; Lightning: its own grid.
Frame grid	4k+1 frames at 16 fps	The Media Loader falls back to 16 fps for an image sequence.
Text encoder	UMT5-XXL, 512 tokens	Token Counter budget 512 (quality drops above about 320–350).

WAN-only nodes

Wan Bridge (MODEL ↔ WANVIDEOMODEL for kijai's WanVideoWrapper), **Wan Frame Inflate** and **Pick Frame** (the T2I-LoRA workaround) and the **Dual Sigma Curve** serve WAN only and are described in Part II.

STATUS

○ From the example workflows and the original chapters; not re-run for this edition.

3 · Other families

Profile · supported by the code, not field-tested

The nodes make no model-specific assumptions where they do not have to: Load Model, Load CLIP and Load VAE read what they load, the Sampler and the Power Upscale take any model, the LoRA Stack applies any LoRA format Core understands. The Empty Latent knows these families by shape:

Family	Empty Latent	Status
Hunyuan video	Hunyuan video	○
Mochi	Mochi video	○
LTX-Video	LTXV video	○
Cosmos	Cosmos video	○
SD 1.5 / SDXL	SD/SDXL image	○
Flux 2	Flux2 image	○
Qwen-Image 2.1	Qwen-Image 2.1 image (64ch)	○

For a family that is not listed, the six questions of a profile are the checklist: does it run with real CFG, one expert or two, picture only or picture and sound, a curve or a trained grid, which frame grid, which text encoder. The answers say which chapters' notes apply.

4 · Recipes

Ready graphs, loaded from **Workflow → Browse Templates** under this pack's name, or dragged in from the repository.

MiniMax H3 — the fox

Template	Way in	Status
T2V `polyhedron_minimax_h3_fox_t2v`	text only, three shots, one run	●
REFS `polyhedron_minimax_h3_fox_refs`	three reference pictures, MiniMax Reference	●
KEYFRAMES `polyhedron_minimax_h3_fox_keyframes`	first frame + two guides, MiniMax Keyframes and Continue	◐
CONTINUE `polyhedron_minimax_h3_fox_continue`	two scenes, scene 2 continues scene 1 (motion)	◐
CONTINUE REFS `polyhedron_minimax_h3_fox_continue_refs`	the same with three reference pictures (ref2va)	◐

All five are built only from this pack; Audio Lock, Drift Control and the Second Pass ship in them bypassed. Details in Part VII, chapter 7.

WAN 2.2 — the examples

Template	Sampler path	Accelerator
`polyhedron_lora_stack_ksampler_base`	KSampler (Advanced), High/Low	off
`polyhedron_lora_stack_ksampler_lightning`	KSampler (Advanced), High/Low	Lightning v1.1, 8 steps (4/4, cfg 1, shift 5)
`polyhedron_lora_stack_wanvideo_base`	WanVideoWrapper, High/Low	off
`polyhedron_lora_stack_wanvideo_accelerator`	WanVideoWrapper, High/Low	on

The WAN examples need ComfyUI-KJNodes and ComfyUI-Custom-Scripts, the `wanvideo` ones also ComfyUI-WanVideoWrapper. ○ unchanged from earlier editions.

Part X — Control, Blend & Transition Check

Polyhedron Suite · User Documentation

> A clip steers the run: its pose, its depth, its edges. Three nodes take a video (or a picture) to a control — **Control Fit**, **Control Map**, **Apply Control**; **Polyhedron Blend** lays several maps into one; the **Save** node keeps every map as a template; **Transition Check** reads what a first → last frame run made of it.

1 · Control Fit
2 · Control Map and the Save templates
3 · Apply Control and the model door
4 · Polyhedron Blend
5 · Transition Check
6 · Recipe: first → last frame with a pose video

1 · Control Fit

Applies to: All models · video and image

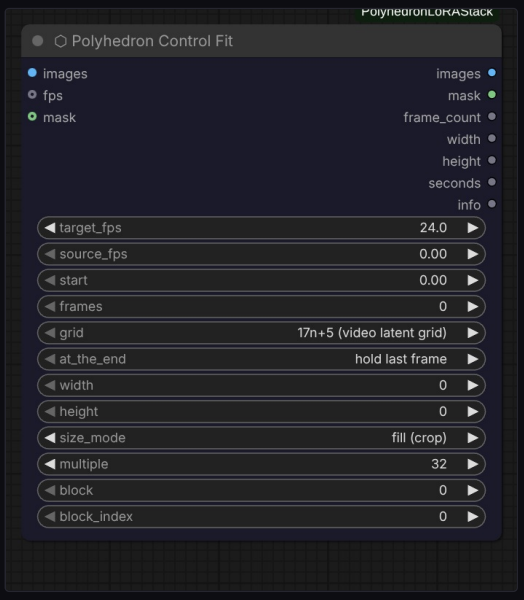

Control Fit: the clip in, the clip at the run's length, size and frame rate out.

A control has to match the run frame for frame. Control Fit brings any clip or picture there, before a map is drawn:

Widget	What it does
target_fps / source_fps	Re-times by nearest frame (30 → 24 fps keeps the real speed). `source_fps` 0 takes the rate from the `fps` input (the Media Loader's).
start / frames	Where the control starts (seconds) and how many frames it takes, snapped down to the grid; 0 = as many as the clip gives.
grid	The valid frame counts of the model: *17n+5* (MiniMax H3), 8n+1, 4n+1 or any.
at_the_end	A clip shorter than the frames wanted: hold its last frame, loop it, or cut the count down.
width / height / size_mode / multiple	The run's size: *fill (crop)*, *fit* or *stretch*, sides rounded to a multiple of `multiple` (32). 0 = from the clip (or from the other side, keeping the aspect).
block / block_index	Take one block of this many frames first (0 = all) — e.g. one direction of a ring render.

Outputs: the fitted `images` and `mask`, `frame_count`, `width`, `height`, `seconds` — wire them on to the Empty Latent so the run and the control cannot drift apart — and an `info` line.

2 · Control Map and the Save templates

Applies to: All models · pose and depth need a model file

Control Map in pose mode. The SDPose file is not on disk: the line names it and offers its Download.

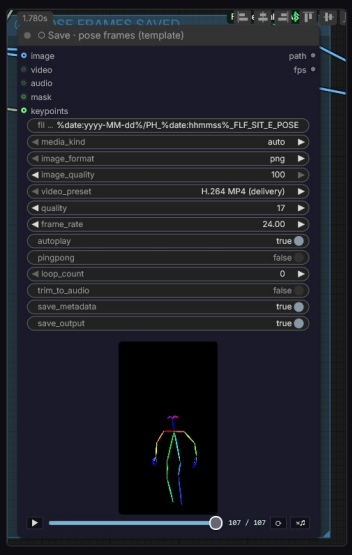

The pose frames in a Save node, playing (`autoplay` on); `keypoints` wired too.

mode	What it draws	Model
pose (SDPose)	The whole body as an OpenPose skeleton: body, hands (`draw_hands`), face (`draw_face`), line width `stick_width` .	SDPose wholebody, models/checkpoints
depth (Depth Anything 3)	Near = bright, far = dark, at `depth_resolution` .	DA3, models/geometry_estimation
canny	Edges between the `low` and `high` thresholds.	—
gray / scribble / soft edges	The picture's light, a hand-drawn look, soft outlines.	—
keypoints	Draws a skeleton that comes in on `keypoints` (OpenPose data), e.g. from a saved JSON.	—

Every map is a template. The `control` output is a clip like any other: into a Save node it becomes a video that a later run loads straight into Apply Control, no Control Map in between. The `keypoints` output carries the pose as data; wired into Save's `keypoints` it is written as `<name>_keypoints.json` (OpenPose format) beside the frames. `preview` on plays the map inside the Control Map itself; with the map in a Save node (autoplay on) leave it off — one player per map is enough.

> Depth and canny read the same fitted frames as the pose — three maps from one clip, each saved (group *2b–2e* of the example workflow).

3 · Apply Control and the model door

Applies to: MiniMax H3 (video) · Qwen-Image 2.1 (image) · needs a current ComfyUI (master)

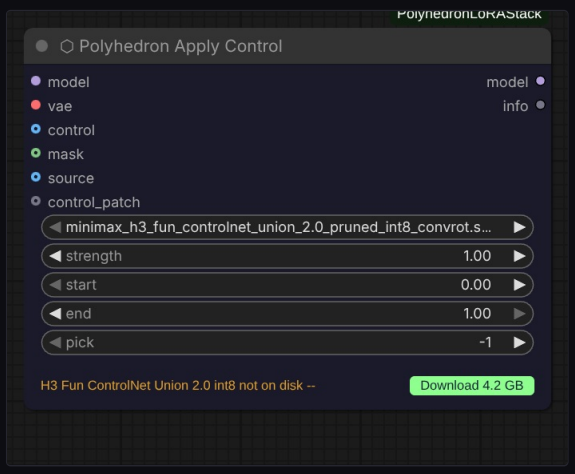

Apply Control with the recommended union preset; not on disk yet, so the line offers its Download.

Apply Control puts a **Fun ControlNet Union** on the model: one file, several kinds of control (canny, depth, HED, MLSD, pose; the 2.0 union adds scribble, layout, gray and inpainting). It sits between the model chain and the sampler.

Widget	What it does
control_model	The union file (models/model_patches).
strength	How hard the control pulls. Several Apply Controls add up: keep their sum near 1 (e.g. pose 0.7 + depth 0.3).
start / end	The share of the steps it acts on. An `end` of 0.6 lets the last 40 % of the steps work on detail.
pick	One frame of a clip as the control of a still (−1 = the whole clip).

Optional inputs: `mask` and `source` for inpainting (white = regenerate under the control, the source is kept where the mask is black), `control_patch` (a union already loaded elsewhere). The first and the last frame of a keyframe run share the run with the control: the keyframe rows get an empty control row.

The model door

The union, the SDPose checkpoint and the Depth Anything 3 files come through the suite's one download door. The combos list them with their size; a missing one turns the node's line orange and offers the **Download** of exactly that file — https, pinned by size and sha256, from huggingface.co (Comfy-Org's repacks; Kijai's Qwen-Image union). A run never downloads. Files you placed by hand are listed after them. The line only shows what the node needs *now*: Control Map in canny mode needs no model, so it shows none.

Line	Means
No model picked — pose needs one. Pick a file, or: [Download]	Nothing chosen; the button fetches the recommended file.
<file> not on disk — [Download]	A door file is picked but missing.
✓ <file> on disk	A door file, there (or your own file — the line says so).
<file> not found in models/... — pick another	A picked file has gone.

4 · Polyhedron Blend

Applies to: All models · pictures and clips

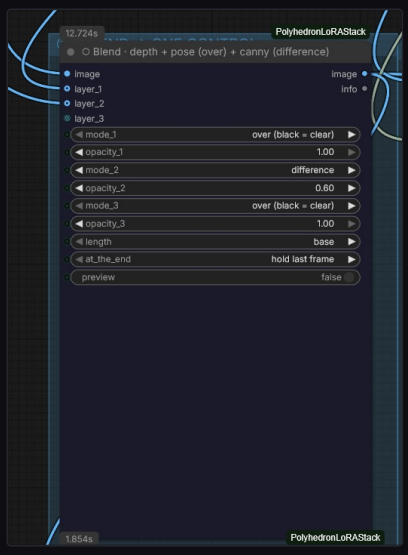

Depth as the base, the pose over (black = clear), canny as difference.

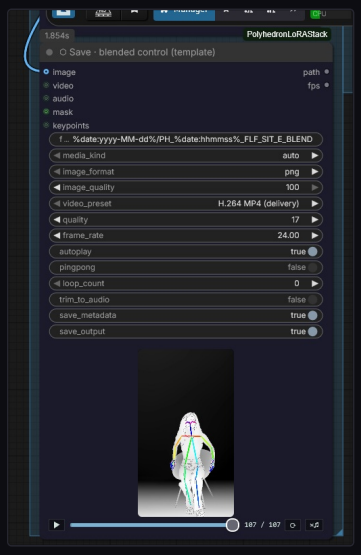

The blended control, saved and playing: one video instead of three.

Up to three layers over a base, applied bottom to top like a layer panel, each with its own `mode_N` and `opacity_N` (0 = off). The modes are the Photoshop set — normal, multiply, screen, overlay, soft light, hard light, color burn / dodge, linear and vivid light, difference, exclusion, hue, saturation, color, luminosity and more — plus one for maps: **over (black = clear)**. Its black is transparent and everything else lies on top, soft edges kept: a skeleton or edge lines on a depth map.

Widget	What it does
length	*base*: the result has the base's frame count; *longest*: the longest input's.
at_the_end	A shorter clip holds its last frame or loops. A single picture lies over every frame.
preview	Plays the result in the node. Off when a Save node shows it anyway.

> **Canny on depth:** white lines *over* a bright figure vanish in the white. As *difference* they stay visible everywhere — dark on the figure, bright on the dark background. Put the pose on top (the last layer), so no line crosses its colours.

A blended map is common practice, not a documented input of the union models: compare it with chained Apply Controls (one per map, strengths adding up to about 1) before you rely on it.

5 · Transition Check

Applies to: All video models · first → last frame runs

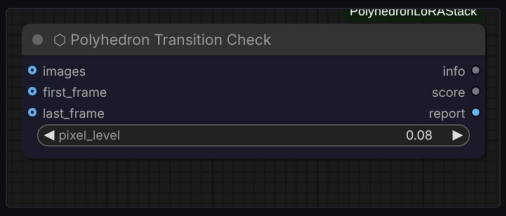

Transition Check: the decoded clip, and the two keyframes it was pinned to.

A first → last frame run can fail quietly: the model fades picture A into picture B instead of moving from one to the other. Transition Check measures it after the decode. For every frame it asks how far along the way from A to B the frame is (*progress*) and how much of it is *no* mix of A and B (*residual*).

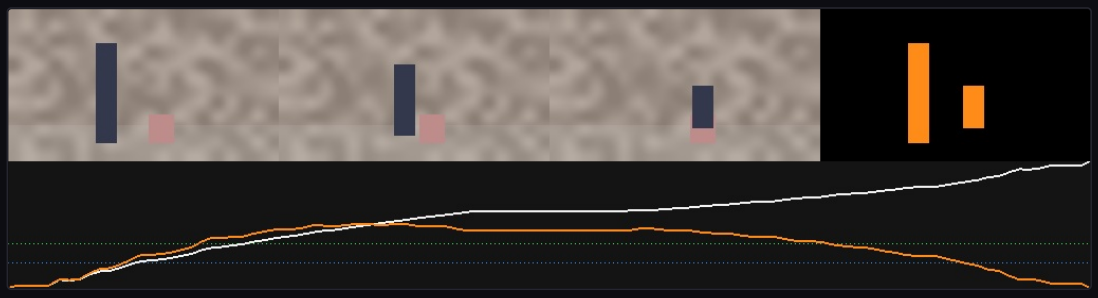

MOTION: first, middle, last frame, the change map; below, progress (white) and residual (orange). The middle frame is no mix — the figure is on its way.

DISSOLVE: the same two ends, faded. The middle frame shows both figures half transparent; the residual stays at zero.

Verdict	Means — and what helps
MOTION	Residual ≥ 0.35 between the ends: something moves through.
DISSOLVE	Residual < 0.2: a fade. Make B *from* A (same camera, light, background), describe the way rather than the pictures, or add a pose video.
MIXED	Partly fade, partly motion.
SNAP	The picture holds and jumps within a few frames. Give the way more time, or a pose or a guide in between.

It also reads the **pair** before a run (how far apart A and B are — too far, and nothing can bridge them), warns when half of the way falls into one end of the clip, and says how close the clip's ends came to the keyframes. Outputs: `info`, a `score` (the residual) and the `report` picture.

6 · Recipe: first → last frame with a pose video

MiniMax H3 fl2va · measured on a test run (a woman sits down on a chair, 4.46 s)

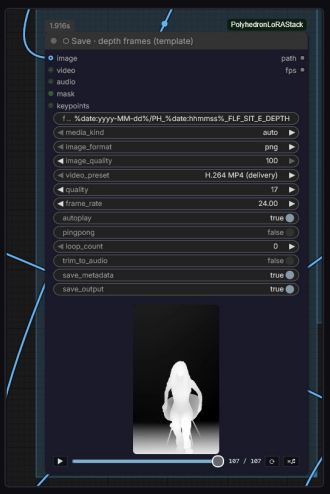

The depth frames of the same clip, saved as a template.

1. **Keyframes:** A (she stands) and B (she has sat down) from the same camera — a still of a reference clip, or B made from A by an image edit. Cine Timeline in Keyframes mode, A at 0 s, B on the last frame.
2. **Prompt:** the official FL2VA rule — describe the *way*: the first state, what visibly changes, the last state. One shot.
3. **Control:** the reference clip at its real speed → Control Fit (the run's length, 768×1344, 24 fps) → Control Map pose, depth, canny → Blend (depth, canny *difference* 0.6, pose *over* 1.0) → Apply Control 0.8–0.9, end 0.6.
4. **Check:** Transition Check after the decode.

Run	Verdict	Half of the way at	90 % at
the reference clip itself	MOTION 0.45	1.38 s	4.17 s
keyframes only	MOTION 0.41	the way is the model's own	
keyframes + blended control (0.8, canny *over*)	MOTION 0.43	1.17 s	3.71 s
the template (0.9, canny *difference*)	MOTION 0.44	1.19 s	3.65 s

The last row is the template `polyhedron_minimax_h3_flf_sitdown` as it ships; its keyframes, pose video and the original clip are in `assets/flf_sitdown/`, its run in the README.

With the control the run follows the reference's motion and both keyframes are hit (29 dB). A pose stretched to a longer duration makes the run slow; keep the reference at its real speed and let Control Fit hold its last frame. A small brightness shift of the decode (about 3 %) is normal; a Filter after the decode evens it out.

Appendix · Running on a network

Everything in this manual assumes the normal case: ComfyUI running on your own machine, reachable at `localhost`. If you ever start it with `--listen` so other machines can reach it, one detail of the Media Loader deserves a word.

The loader browses **your file system**. That is the whole point of it: you point it at any folder and it shows you what is inside. The routes behind that browsing take the folder from the client — from the node in your browser — and read it on the machine ComfyUI runs on. On a single machine, the client and that machine are the same thing, so this is simply the feature working.

Bound to a network, they are not the same thing any more. Every client that can reach the server could then ask it to list, read, or upload into arbitrary directories on the host — and could pop a native file dialog on it.

What the pack does about it

When ComfyUI is bound beyond `localhost`, the eleven routes that take a client-supplied path refuse with **403**. That covers browsing folders, listing and reading files, thumbnails and dimensions, uploads, the native file dialogs and the “open in explorer” action. The three routes that work strictly inside the loader’s own managed sequence folder keep working, since they never take a path from outside.

If that is not what you want — a trusted studio LAN, or a machine reachable only through a tunnel you control — set the environment variable `ULS_ALLOW_LAN_BROWSE=1` before starting ComfyUI, and the routes open up again. The refusal message names the variable, so you do not have to remember it.

> **Nothing changes on a normal setup.** On the default localhost bind the loader behaves exactly as described in Part I — the lock is not active, and there is nothing to configure. It is also deliberately fail-open: if the pack cannot determine how the server is bound, it treats the case as local rather than locking a working setup out of its own files.